REG	STATE	PROJECT	SHEET NO.	TOTAL SHEETS

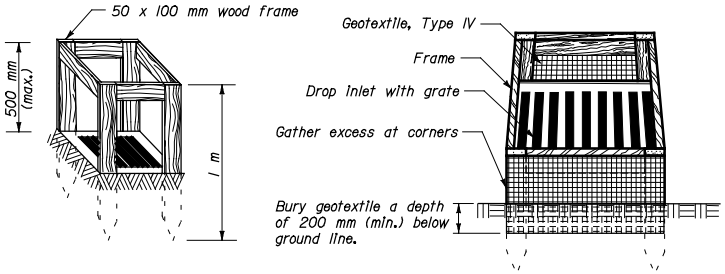

SILT FENCE DROP INLET PROTECTION (TYPE A)

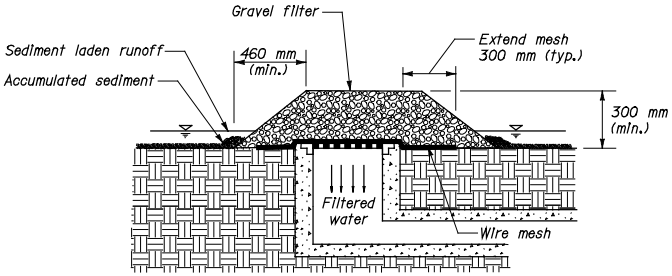

GRAVEL AND WIRE MESH DROP INLET PROTECTION (TYPE B)

NOTE:

1. Dimensions not labeled are in millimeters.
2. For gravel filters use 50 - 75 mm diameter coarse aggregate.
3. Use wire mesh with 12 x 12 mm openings.
4. Use Type A inlet protection in sump locations only.
5. Use Type B inlet protection only in sump locations where heavy concentrated flows are not expected. Do not use where ponding around the structure might cause inconvenience or damage.



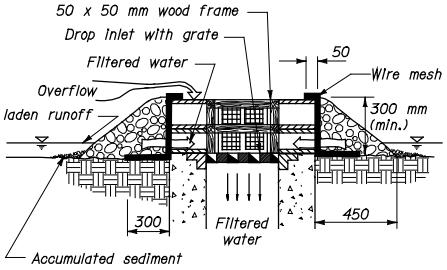

SECTION A-A

BLOCK AND GRAVEL DROP INLET PROTECTION (TYPE C)

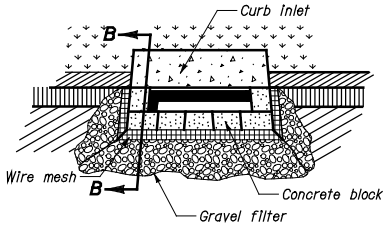

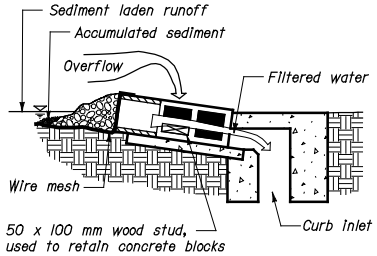

SECTION B-B

CURB INLET PROTECTION, BLOCK AND GRAVEL (TYPE D)

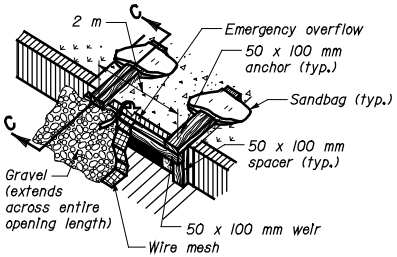

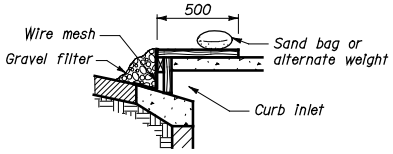

SECTION C-C

CURB INLET PROTECTION, WOODEN WEIR (TYPE E)

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
FEDERAL LANDS HIGHWAY OFFICE

METRIC STANDARD

TEMPORARY INLET PROTECTION

STANDARD APPROVED FOR USE 03/96

REVISED:

STANDARD M157-2

MST157D2.DGN

$$$$$DGNSPEC$$$$$ $$$$$SYTIME$$$$$