

## AN IMPROVED RESPONSE SURFACE METHODOLOGY ALGORITHM WITH AN APPLICATION TO TRAFFIC SIGNAL OPTIMIZATION FOR URBAN NETWORKS

Shirish S. Joshi  
Ajay K. Rathi

Oak Ridge National Laboratory  
Center for Transportation Analysis  
P.O. Box 2008, MS 6206  
Oak Ridge, TN 37831, U.S.A.

Jeffrey D. Tew

ISQ Department  
P.O. Box 6696  
Consolidate Freightways, Inc.  
Portland, OR 97208, U.S.A.

### ABSTRACT

This paper illustrates the use of the simulation-optimization technique of response surface methodology (RSM) in traffic signal optimization of urban networks. It also quantifies the gains of using the common random number (CRN) variance reduction strategy in such an optimization procedure. An enhanced RSM algorithm which employs conjugate gradient search techniques and successive second-order models is presented instead of the conventional approach. An illustrative example using an urban traffic network exhibits the superiority of using the CRN strategy over direct simulation in performing traffic signal optimization. The relative performance of the two strategies is quantified with computational results using the total network-wide delay as the measure of effectiveness (MOE).

### 1 INTRODUCTION

In many simulation studies the analyst is interested in exploring the settings of the non random inputs, called the factors, to yield an optimal output, called the response. For this purpose, simulation runs are performed at different factor levels, to investigate the effects of the factors on the response. The analyst then attempts to estimate a *metamodel* of a selected response, that is, a linear or non-linear model of the mean response in terms of the factors. This estimated metamodel is used to perform a sequential search in an attempt to find the optimal (or near optimal) value for the response. This process of achieving optimality of responses will be referred to as the simulation-optimization technique. The sequential search employed by such techniques depend extensively on the estimation of the metamodel parameter. The quality of such a search depends upon the quality of estimation

of these parameters. Since this procedure assumes stochastic nature of responses, the estimates of the unknown parameters of such metamodels inherit certain amount of variability. The quality of these estimates is characterized by their variance. Reduced variance of these estimates suggests improved search directions for the optimization procedure.

Variance reduction techniques (VRT) try to reduce the variance of the estimates of interest. Among the various correlation-induction techniques used as VRT, such as the common random number strategy, antithetic variates, control variates, etc., the focus of this paper is on the use of the common random number strategy.

The goal of this paper is to demonstrate the use of common random number (CRN) strategy in the simulation-optimization technique of response surface methodology (RSM). After providing a theoretical framework illustrating the superiority of the using common random numbers over direct simulation in RSM studies, this idea is demonstrated with illustrative examples on a sample urban network. Quantitative gains of using the CRN strategy over ordinary simulation, or the Independent Streams strategy (referred to, as the *IS strategy*), are also illustrated.

The remainder of this section discusses a modified RSM algorithm and the CRN strategy. Section 2 develops the theoretical framework, illustrative examples are included in Section 3, and Section 4 presents the conclusions of this study.

#### 1.1 RSM

This sub-section presents a standard RSM algorithm offered by Myers (1976). For the modified RSM algorithm used by this work, the reader is referred to Joshi, Sherali, and Tew (1994).

**Step 1:** Fit a first-order regression model to the mean

"The submitted manuscript has been authored by a contractor of the U.S. Government under contract No. DE-AC05-96OR22464. Accordingly, the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or allow others to do so, for U.S. Government purposes."

**MASTER**  
DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED  
SLC

response over some restricted region of the factor space.

**Step 2:** Estimate the path of steepest descent using the first-order model.

**Step 3:** Search along the path of steepest descent until no further improvement in the mean response is observed.

**Step 4:** Estimate the most favorable response based on the first three steps.

**Step 5:** Repeat Steps 1 through 4 over a new region. If curvature is evident, then perform an elaborate search using a second-order experimental design. Report the optimum solution.

For Step 1, the experimenter should judiciously select an experimental design which has desirable properties such as minimum variance in order to obtain better estimates of the unknown parameters. The first-order linear model is represented as

$$y_j = \beta_0 + \sum_{i=1}^k \beta_i x_i + \epsilon_j, \quad (1)$$

where  $y_j$  is the response at the  $j$ th replication and the  $i$ th design point.  $x_1, x_2, \dots, x_k$  are the  $k$  factor variables,  $\beta_i$  are the unknown parameters of the linear model, and  $\epsilon_j$  is the error term at the  $i$ th design point and the  $j$ th replication ( $i = 1, 2, \dots, m, j = 1, 2, \dots, r, l = 1, 2, \dots, k$ ).

Let  $b_l$  be the estimates of  $\beta_l$  ( $l = 1, 2, \dots, k$ ). Step 2 uses these estimates to compute the path of steepest descent given by  $(-b_1, -b_2, \dots, -b_k)$ . Responses are observed along this path until no further improvement is achieved. At this point, if curvature is evident, then a second-order model is used and is given by

$$y_j = \beta_0 + \sum_{i=1}^k \beta_i x_i + \sum_{h>l} \beta_{lh} x_h x_l + \sum_{i=1}^k \beta_{ii} x_i^2 + \epsilon_j, \quad (2)$$

where  $\beta_i, \beta_{hh}$  and  $\beta_{ll}$  are the unknown parameters of the second-order model ( $l = 1, 2, \dots, k, h > l$ ) and the remaining terms are as defined in (1). This model is used to perform a canonical analysis which involves evaluation and analysis of the stationary point. Using this analysis, an optimum is reported, perhaps following some additional investigation in the case of a detected ridge system. The next sub-section presents the CRN strategy which is combined with this algorithm to improve the RSM technique in practice.

### 1.2 Common Random Number Strategy

The idea of the CRN strategy is to compare alternative simulation models under similar experimental conditions in order to improve confidence that observed

differences in performance are due to the differences in the model structure rather than to the differences in the experiment itself (see p. 61 of Law and Kelton 1991). Under the CRN strategy, the same set of random number streams,  $R_i = (r_{i1}, r_{i2}, \dots, r_{ig})$  is applied to all  $m$  design points in the  $i$ th replicate where  $g$  is the number of streams used to drive the simulation model. Also, independent random number streams are used across replicates of the experimental design. Replications reduce the variance of the outputs and also present means of computing pure error.

For the CRN strategy applied to simulation experiments, we make the following assumptions:

1. The response variance is constant across all design points, so that for  $j = 1, 2, \dots, m$  and  $i = 1, 2, \dots, r$ ,

$$\sigma_j^2 = \text{var}(y_j(R_i)) = \sigma^2. \quad (3)$$

2. There is a constant nonnegative correlation between all pairs of responses within a given replicate.  $y_{ij}$  and  $y_{ik}$  ( $j \neq k$ ). That is, for  $j \neq k$ , and  $l < j, k < m$ , and  $0 < \rho_{jk} < 1$ ,

$$\text{corr}(y_{ij}, y_{ik}) = \rho. \quad (4)$$

3. The vector of responses comprising the  $i$ th replicate has a multivariate normal distribution. Under the first two assumptions, the covariance matrix between observations within a replicate is given by

$$\Sigma^{(CRN)} = \sigma^2 \begin{bmatrix} 1 & \rho & \dots & \rho \\ \rho & 1 & \dots & \rho \\ \cdot & \cdot & \dots & \cdot \\ \cdot & \cdot & \dots & \cdot \\ \cdot & \cdot & \dots & \cdot \\ \rho & \rho & \dots & 1 \end{bmatrix}. \quad (5)$$

Note that the variance on the estimates of the unknown parameters of the linear model in (1) is  $\sigma^2$  under IS strategy, but is reduced by a factor of  $(1-\rho_r)\sigma^2$  under the CRN strategy (see Joshi and Tew 1995). The next section discusses the gains of using the CRN over IS strategy in RSM studies.

## 2 ANALYTICAL RESULTS FOR RSM UNDER THE CRN STRATEGY

As the gradient search is performed, the statistic of interest is the difference between the responses along the path. If we denote  $\bar{y}_0$  as the mean response at the center of the current design, and  $\bar{y}_j$  ( $j = 1, 2, \dots, w$ ) as the  $w$  mean responses along the gradient search path, then our

statistics of interest are  $\bar{y}_j - \bar{y}_{j-1}$  ( $j = 1, 2, \dots, w$ ). Under the CRN scheme, we apply the same random number streams to drive the stochastic components to obtain simulation responses  $\bar{y}_j$  ( $j = 0, 1, \dots, w$ ). By the first two assumptions of the CRN strategy, we have positive correlations  $\rho$ , induced among all these responses. Under the independent strategy, ( $j = 1, 2, \dots, w$ )

$$\text{var}(y_j - y_{j-1}) = \frac{2\sigma^2}{r}, \quad (6)$$

while under the CRN strategy,

$$\text{var}(y_j - y_{j-1}) = \frac{2\sigma^2(1-\rho^2)}{r}, \quad (7)$$

where  $r$  is the number of replications performed at each design point, and  $\sigma^2$  is the homogeneous variance of the response at each design point (see Joshi and Tew 1995).

From (7) we see that as  $\rho \rightarrow 1$ , the variance on the statistic of interest in the gradient search procedure approaches zero. That is, if we can induce large covariances or correlations between responses, then we have a larger reduction in variance of the statistics of interest under the gradient search method. The expected reduction in variance being the magnitude of the induced correlation.

The advantage of using CRN for the gradient search can be characterized in another way. In the gradient search, assume that once the step length  $\lambda$  is fixed, we need to take exactly  $w$  steps before the response starts increasing. That is, after fixing the step length, we should get responses to improve exactly until the  $(w-1)$ st step, and on the  $w$ -th step, the response should increase forcing us to stop the gradient search procedure. However, due to natural variation in  $y$ , the variance in the mean responses may be so large that this could result in the search taking something other than exactly  $w$  steps along the gradient. We would like to increase the probability that the experimenter stops after exactly  $w$  steps.

In other words, the gradient search procedure is similar to performing sequential tests of the form ( $j = 1, 2, \dots, w$ )

$$H_0: \bar{y}_j - \bar{y}_{j-1} \leq 0, \text{ vs. } H_1: \bar{y}_j - \bar{y}_{j-1} > 0.$$

If the search is performed accurately, then the experimenter should fail to reject the first  $w-1$  tests, and reject the  $w$ -th test. For this purpose, let us first define  $d_i = \bar{y}_{i-1} - \bar{y}_i$ , ( $i=1, 2, \dots, w-1$ ), and  $d_w = \bar{y}_w - \bar{y}_{w-1}$ . Maximizing the probability that the experimenter stops after exactly  $w$  steps, is therefore equivalent to maximizing the following probability

$$Pr(d_1 \geq 0, d_2 \geq 0, \dots, d_w \geq 0). \quad (8)$$

This probability is different under the IS and CRN strategies. We now prove that the above probability is higher under the CRN strategy than under the IS strategy. Proving this would also indicate that the power of the test under the CRN strategy is greater than that under the IS strategy for the following hypothesis test

$$H_0: d_1 > 0, d_2 > 0, \dots, d_w > 0, \text{ versus, } H_1: \text{Any of the above conditions is violated.}$$

We know that the  $d_i$ 's are not independent and so the tests on the  $d_i$ 's are also not independent. Now,

$$\text{var}(d_i) = \text{var}(\bar{y}_i) + \text{var}(\bar{y}_{i-1}) - 2\text{cov}(\bar{y}_i, \bar{y}_{i-1}). \quad (9)$$

Note that while  $\text{cov}(\bar{y}_i, \bar{y}_{i-1}) = 0$  under the IS strategy, we induce covariances between pairs of responses under the CRN strategy such that  $\text{cov}(\bar{y}_i, \bar{y}_{i-1}) = \rho^2\sigma^2$ . Thus, we get for the IS strategy,

$$\text{var}(d_i) = \frac{2\sigma^2}{r}, \quad (10)$$

and for the CRN strategy,

$$\text{var}(d_i) = \frac{2\sigma^2(1-\rho^2)}{r}. \quad (11)$$

Also, under the IS strategy

$$\text{cov}(d_i, d_{i-1}) = \text{cov}((\bar{y}_i - \bar{y}_{i-1}), (\bar{y}_{i-1} - \bar{y}_i)) = \frac{-\sigma^2}{r}, \quad (12)$$

and under the CRN strategy,

$$\text{cov}(d_i, d_{i-1}) = \text{cov}((\bar{y}_i - \bar{y}_{i-1}), (\bar{y}_{i-1} - \bar{y}_i)) = \frac{\sigma^2(1-\rho^2)}{r}. \quad (13)$$

The variance-covariance matrix of  $d_i$ 's is thus a tridiagonal matrix denoted by  $\Theta$ . Note that the structure of this matrix is identical under the two simulation strategies, and this matrix is represented as

$$\Theta = \begin{bmatrix} \gamma & \delta & 0 & \dots & 0 \\ \delta & \gamma & \delta & \dots & 0 \\ \dots & \dots & \dots & \dots & \dots \\ 0 & \dots & \delta & \gamma & \delta \\ 0 & \dots & 0 & \delta & \gamma \end{bmatrix} \quad (14)$$

where  $\gamma = 2\sigma^2/r$  under the IS strategy and  $\gamma = 2\sigma^2(1-\rho^2)/r$  under the CRN strategy. Also,  $\delta = -\sigma^2/r$  under the IS strategy and  $\delta = -\sigma^2(1-\rho^2)/r$  under the CRN strategy.

To obtain independent tests on  $d_i$ 's, we use an orthogonal transformation denoted by  $\Gamma$ , such that

$$\Theta^* = \Gamma\Theta\Gamma^T \quad (15)$$

is a diagonal matrix. Note that  $\Gamma$  is an orthogonal matrix whose columns comprise of the eigenvectors of  $\Theta$ . The transformation  $\Gamma$  will be different under IS and CRN strategies, but will have the same matrix structure. Thus, if we transform  $d^* = (d_1^*, d_2^*, \dots, d_w^*)$  to  $d^*$  such that

$$d^* = \Gamma \cdot d, \quad (16)$$

and let  $d^* = (d_1^*, d_2^*, \dots, d_w^*)$ , then the tests performed on  $d_i^*$  are independent. The goal then becomes to maximize the following probability

$$Pr(d_1^* > 0, \dots, d_w^* > 0) = Pr(d_1^* > 0) \dots Pr(d_w^* > 0). \quad (17)$$

Using  $\Phi$  as the standard normal cumulative distribution function, we can standardize the individual  $d_i^*$ 's under both strategies. For notational convenience,  $d_i^*$ 's are replaced by  $d_i$ 's so that the  $d_i$ 's under the CRN strategy would actually refer to the  $d_i^*$ 's from (16). The probabilities are then obtained as ( $i = 1, 2, \dots, w$ ),

$$Pr(d_i > 0) = \Phi\left(\frac{\bar{d}_i}{\sigma_d/w}\right), \quad (18)$$

where  $\bar{d}_i$  is the mean of  $d_i$  ( $i = 1, 2, \dots, w$ ) and  $\sigma_d^2$  is the homogeneous variance of all  $d_i$ . Hence the homogeneous variance of all  $d_i$ 's is  $\sigma_d^2/w$ . The goal in (18) is now equivalent to minimizing  $\sigma_d$ . Equations (10) and (11) give the expressions for  $\sigma_d^2$  under the IS and CRN strategy, respectively. We notice that under the CRN strategy,  $\sigma_d$  is less than that under IS strategy by a factor of  $\sqrt{1-\rho^2}$ , thus showing the superiority of the CRN over the IS strategy.

### 3 COMPUTATIONAL RESULTS

An urban traffic network shown in Figure 1 is used to compare the relative effectiveness of CRN and IS strategies in the context of the RSM algorithm. The simulation model used for the purpose of this study is a microscopic model developed by the Federal Highway Administration (FHWA), called TRAF-NETSIM. To justify the validity of these quantitative results, five optimization searches were conducted using the same initial solution but employing different random number seeds under each search. The relative performance of the two strategies is quantified using the total delay in the network as the measure of effectiveness (MOE).

Table 1 represents the geometric characteristics of the urban traffic network under study. It is assumed that at any stage of this search, the model can be represented as a first-order model in  $x_1$  and  $x_2$ , as in (1) or a second-order model as given by (2). A  $2^2$  factorial experiment is used to construct the first-order model and a central composite design for the second-order model. Two replications are performed at each design point. The decision variables are the green Splits for traffic at node 5 for approach node 13 ( $x_1$ ) and at node 8 for approach node 14 ( $x_2$ ). The starting solution was 32 seconds for each variable. Five optimization searches are conducted under both strategies.

Table 2 exhibits the optimal solution for the total delay in the network in person-minutes reported under both strategies. The average delay in the network across all five searches is 15085 under the CRN strategy and 15597 under the IS strategy. The RSM procedure carried out under the CRN strategy yields a delay estimate which is 8 hours less than that carried out under the IS strategy, thus illustrating the superiority of the CRN strategy. We also observed that only one of the five searches conducted under the IS strategy achieves improving direction, in contrast to all five searches conducted under the CRN strategy.

Table 3 indicates the average gain in delay per simulation run. This can be an extremely important statistic for practitioners, especially if the network under study is large and therefore requires large amounts of simulation time. In such a situation, the analyst would like to achieve the optimal (or near optimal) solution in as small number of simulation runs as possible. In addition, it will also necessitate a reduction in the number of replications at each design point.

### 4 CONCLUSIONS

The application of the CRN strategy in a standard simulation-RSM algorithm is demonstrated with an illustrative traffic network. Correlation-induction

strategies have not been employed in sequential simulation-RSM studies in traffic optimization and hence this application of the CRN strategy is an addition to the existing literature. At each stage of the RSM algorithm, analytical results to show the gains of the CRN strategy over direct simulation are developed. To quantify the gains of the CRN strategy over the IS strategy, an empirical investigation on the example was described in Section 3. These performance measures exemplify the superiority of the CRN strategy over direct simulation.

Table 1: Network Description

<b>Link length</b> All links	500 ft.
<b>Signal Control</b> Nodes 5,6, 7, and 8 All other nodes	Signal Control. Perpetual Green.
<b>Number of Lanes</b> All links	Two lanes.
<b>Entry Volume</b> All nodes	1600 vph.
<b>Turning Movement</b> At four-way intersections At other intersections	25% left, 50% through, 25 % right. 100% through.

Table 2: Total Delay in the Network

Search #	Optimal reported total delay in the network (person minutes)	
	CRN Strategy	IS Strategy
1	15038	15794*
2	15087	15616*
3	15113	15690*
4	15054	15203
5	15135	15681*
Average	15085	15597

\* indicates that the search failed.

Table 3: Improvement per simulation run

	CRN Strategy	IS Strategy
Reduced delay (person minutes) per simulation run	19.45	8.43

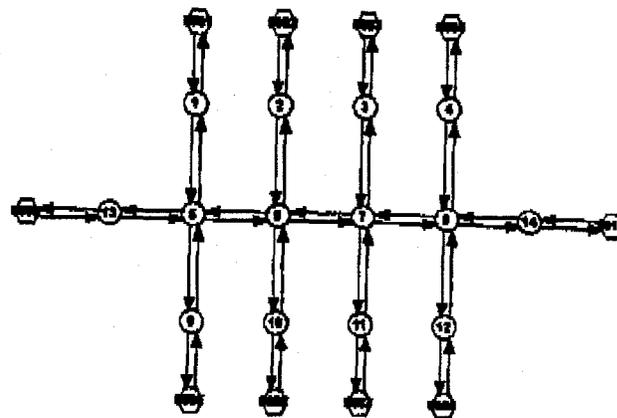


Figure 1: Traffic Network

## ACKNOWLEDGMENTS

The authors thank the editors for their comments. The authors also wish to convey their sincere appreciation to research assistant, Kathy Dyke for her helpful suggestions.

## REFERENCES

- Federal Highway Administration. 1980. *Traffic Network Analysis with NETSIM - A User Guide*. Federal Highway Administration, U.S. Department of Transportation.
- Joshi S.S., H.D. Sherali, and J.D. Tew. 1994. An Enhanced RSM Algorithm Using Gradient-Deflection and Second-Order Search Strategies. In *Proceedings of the 1994 Winter Simulation Conference*, ed. J. Tew, S. Manivannan, D. Sadowski, and A. Seila: 297-304. Institute of Electrical and Electronics Engineers, Orlando, Florida.
- Joshi, S.S., and J. D. Tew. 1995. Statistical Analysis and Validation Procedures Under the Common Random Number Correlation Induction Strategy for Multipopulation Simulation Experiments. *European Journal of Operational Research*, to appear.
- Law, A. M. and W. D. Kelton. 1991. *Simulation Modeling and Analysis*, 2d ed. New York: McGraw-Hill.
- Myers, R. H. 1976. *Response Surface Methodology*. Ann Arbor, MI: Edwards Brothers, Inc.

## AUTHOR BIOGRAPHIES

**SHIRISH S. JOSHI** is a post doctoral research associate at the Oak Ridge National Laboratory in the Intelligent Transportation Systems (ITS) research group. He received his B.S. in Electrical Engineering from the Bombay University in 1986, M.S. in Mathematical Sciences from Virginia Commonwealth University in 1989, and M.S. and Ph.D. in Industrial and Systems Engineering from Virginia Polytechnic Institute and State University in 1991 and 1993 respectively. His current research interests include output analysis of traffic simulations, simulation-optimization techniques, variance reduction techniques, and design of experiments.

**AJAY K. RATHI** is the R&D Program Manager for the Intelligent Transportation Systems (ITS) Research Group at the Oak Ridge National Laboratory. Dr. Rathi has over 12 years of research and Project Management Experience in transportation systems modeling and analysis. He holds an M.S. and a Ph.D. in Civil Engineering from the Ohio State University. He is a

registered professional engineer and a member of several committees of the Transportation Research Board, the ITS America steering committee on Advanced Traffic Management Systems, the American Society of Civil Engineers, and the Society for Computer Simulation. He is the author of nearly 100 technical books, reports, papers, and publications.

**JEFFREY D. TEW** is a Senior Systems Engineer at Consolidated Freightways, Inc, and an Adjunct Associate Professor at the Oregon Graduate Institute. Prior to these appointments he was on the faculty in the Industrial and Systems Engineering Department at the Virginia Polytechnic Institute and State University. He has published numerous articles in many archival journals such as *EJOR*, *JSCS*, *Management Science*, *Operations Research*, and *SCS Transactions*. He was the 1994 WSC Proceedings Editor as well as the Vice President/President elect of the TIMS College on Simulation. He received a B.S. in Mathematics in 1979, an M.S. in Statistics in 1981, and a Ph.D. in Industrial Engineering in 1986, all from Purdue University. His current research interests include variance reduction techniques, simulation optimization, and the design of experiments. He is a member of Alpha Pi Mu, ACM, ASA, IME, INFORMS, SCS, and Sigma Xi.