


FIGURE 7
BANFIELD FREEWAY, PORTLAND, OREGON

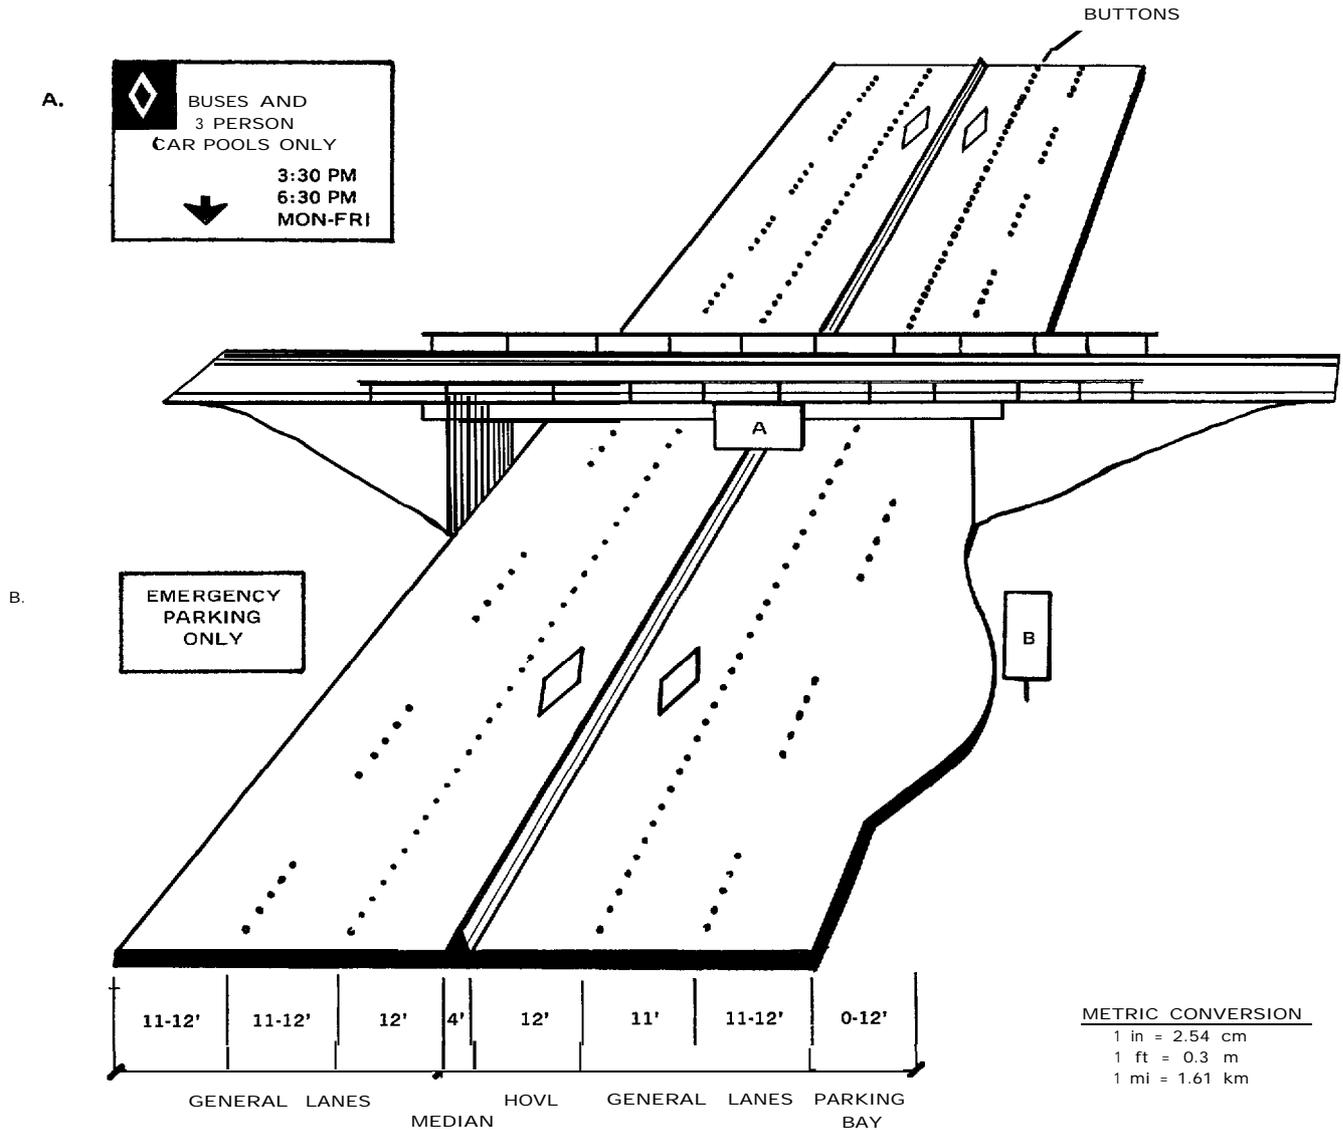

AASHTO DESIGN FACTORS

ALIGNMENT: curvilinear
 VERTICAL SIGHT DISTANCE: good
 POSTED SPEED: 45 mph
 ROADSIDE HAZARDS: some restricted clearances

OTHER HAZARDS: lane drops

MUTCD DESIGN FACTORS

LANE-USE CONTROL SIGNALS: none
 ADVANCED WARNING SIGNS: standard
 RESTRICTED LANE SIGNS: standard
 END OF HOVL SIGNS: standard
 DIAMOND SYMBOL: 1,000' intervals
 HOVL DELINEATION: 4" white raised buttons in continuous line

BANFIELD FREEWAY, PORTLAND, OREGON

