

REF

✓

FAA 80-11

VORTEX ADVISORY SYSTEM Volume I: Effectiveness for Selected Airports

J.N. Hallock

U.S. DEPARTMENT OF TRANSPORTATION
RESEARCH AND SPECIAL PROGRAMS ADMINISTRATION
Transportation Systems Center
Cambridge MA 02142



MAY 1980
FINAL REPORT

DOCUMENT IS AVAILABLE TO THE PUBLIC
THROUGH THE NATIONAL TECHNICAL
INFORMATION SERVICE, SPRINGFIELD,
VIRGINIA 22161

Prepared for
U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
Systems Research and Development Service
Washington DC 20591

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

NOTICE

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the object of this report.

1. Report No. FAA-RD-80-62, I		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle VORTEX ADVISORY SYSTEM Volume I: Effectiveness for Selected Airports				5. Report Date May 1980	
				6. Performing Organization Code	
7. Author(s) J.N. Hallock				8. Performing Organization Report No. DOT-TSC-FAA-80-11, I	
9. Performing Organization Name and Address U.S. Department of Transportation Research and Special Programs Administration Transportation Systems Center Cambridge MA 02142				10. Work Unit No. (TRAIS) FA086/R0132	
				11. Contract or Grant No.	
12. Sponsoring Agency Name and Address U.S. Department of Transportation Federal Aviation Administration Systems Research and Development Service Washington DC 02591				13. Type of Report and Period Covered Final Report Sept 1977-Dec 1977	
				14. Sponsoring Agency Code	
15. Supplementary Notes					
16. Abstract <p>The Vortex Advisory System (VAS) is based on a wind criterion; when the wind near the runway end is outside of the criterion, all interarrival Instrument Flight Rules (IFR) aircraft separations can be set at 3 nautical miles. Five years of wind data have been obtained for 20 airports. By comparing the VAS wind criterion to the 5 years of wind data, the percentages of time that interarrival separations can be reduced at the 20 airports have been found. The percentages are given on an hourly and a monthly basis.</p> <p>Volume II (to be published at a later date) will examine the VAS effectiveness at Chicago O'Hare (ORD) with respect to the length of the intervals during which reduced separations might have been used.</p>					
17. Key Words Aircraft Wake Vortices Vortices Vortex Advisory System Wind Criterion				18. Distribution Statement DOCUMENT IS AVAILABLE TO THE PUBLIC THROUGH THE NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VIRGINIA 22161	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 122	22. Price

PREFACE


The concept of a Vortex Advisory System (VAS) evolved from the analysis of tens of thousands of vortex tracks. Wind velocity was found to be the primary determinant of vortex behavior. The VAS uses wind-velocity measurements to indicate when interarrival separations can be reduced. This study examines historical wind data to permit estimates of the utility of a VAS if the system is installed at the 20 airports considered herein.

We wish to acknowledge the assistance of Robert Crosby, System Development Corporation, who programmed the calculations and ran the numerous cases. We also thank Myron Clark, FAA, and Thomas Sullivan, TSC, for their suggestions and comments in the preparation of this volume of the report.

METRIC CONVERSION FACTORS

Approximate Conversions to Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
in	inches	2.5	centimeters	cm
ft	feet	30	centimeters	cm
yd	yards	0.9	meters	m
mi	miles	1.6	kilometers	km
AREA				
sq in	square inches	6.5	square centimeters	cm ²
sq ft	square feet	0.09	square meters	m ²
sq yd	square yards	0.8	square meters	m ²
sq mi	square miles	2.6	square kilometers	km ²
	acres	0.4	hectares	ha
MASS (weight)				
oz	ounces	28	grams	g
lb	pounds short (2000 lb)	0.45 0.3	kilograms tonnes	kg t
VOLUME				
teaspoon	teaspoons	5	milliliters	ml
tablespoon	tablespoons	15	milliliters	ml
fluid ounce	fluid ounces	30	milliliters	ml
cup	cups	0.24	liters	l
pint	pints	0.47	liters	l
quart	quarts	0.95	liters	l
gallon	gallons	3.8	liters	l
cu ft	cubic feet	0.03	cubic meters	m ³
cu yd	cubic yards	0.76	cubic meters	m ³
TEMPERATURE (direct)				
°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

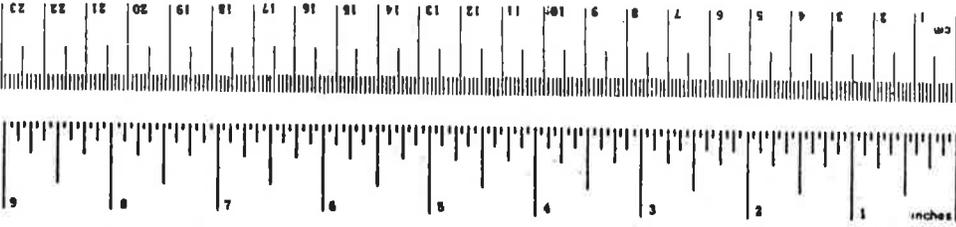

Approximate Conversions from Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
mm	millimeters	0.04	inches	in
cm	centimeters	0.4	inches	in
m	meters	3.3	feet	ft
km	kilometers	1.1	yards	yd
		0.6	miles	mi
AREA				
cm ²	square centimeters	0.16	square inches	sq in
m ²	square meters	1.2	square yards	sq yd
km ²	square kilometers	0.4	square miles	sq mi
ha	hectares (10,000 m ²)	2.6	acres	acres
MASS (weight)				
g	grams	0.035	ounces	oz
kg	kilograms	2.2	pounds	lb
t	tonnes (1000 kg)	1.1	short tons	
VOLUME				
ml	milliliters	0.03	fluid ounces	fl oz
l	liters	2.1	pints	pt
l	liters	1.06	quarts	qt
l	liters	0.26	gallons	gal
m ³	cubic meters	35	cubic feet	ft ³
m ³	cubic meters	1.3	cubic yards	yd ³
TEMPERATURE (direct)				
°C	Celsius temperature	9/5 (then add 32)	Fahrenheit temperature	°F




TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1.	INTRODUCTION.....	1
2.	EFFECTIVENESS.....	5
	2.1 Wind Data.....	5
	2.2 VAS Ellipse.....	6
	2.3 Airports and Runways.....	8
3.	EFFECTIVENESS VALUES.....	12
	3.1 Chicago-O'Hare International Airport.....	12
	3.2 William B. Hartsfield Atlanta International Airport.....	21
	3.3 Logan International Airport.....	21
	3.4 Washington National Airport.....	22
	3.5 Stapleton International Airport....	22
	3.6 Dallas-Fort Worth Regional Airport.	23
	3.7 Detroit Metropolitan Wayne County Airport.....	23
	3.8 John F. Kennedy International Airport.....	23
	3.9 Los Angeles International Airport..	24
	3.10 LaGuardia Airport.....	24
	3.11 Miami International Airport.....	24
	3.12 Minneapolis-St. Paul International Airport.....	25
	3.13 Seattle-Tacoma International Airport.....	25
	3.14 San Francisco International Airport.....	25
	3.15 Tampa International Airport.....	26
	3.16 Cleveland-Hopkins International Airport.....	26
	3.17 Newark International Airport.....	26
	3.18 Philadelphia International Airport.....	27
	3.19 Greater Pittsburgh International Airport.....	27
	3.20 Lambert-St. Louis International Airport.....	27
4.	COMMENTS AND SUMMARY.....	108
	4.1 Other Guard-Band Sizes.....	108
	4.2 Enhancements.....	110
	4.3 Summary.....	110
5.	REFERENCES.....	111

LIST OF ILLUSTRATIONS (CONT'D)

<u>Figure</u>		<u>Page</u>
40.	VAS Effectiveness for JFK Runway 4/22.....	58
41.	VAS Effectiveness for JFK Runway 4/22 (Concluded).....	59
42.	VAS Effectiveness for JFK Runway 13/31....	60
43.	VAS Effectiveness for JFK Runway 13/31 (Concluded).....	61
44.	VAS Effectiveness and Arrival Demand Versus Hour for JFK.....	62
45.	VAS Effectiveness for LAX Runway 6/24.....	63
46.	VAS Effectiveness for LAX Runway 6/24 (Concluded).....	64
47.	VAS Effectiveness for LAX Runway 7/25.....	65
48.	VAS Effectiveness for LAX Runway 7/25 (Concluded).....	66
49.	VAS Effectiveness and Arrival Demand Versus Hour for LAX.....	67
50.	VAS Effectiveness for LGA Runway 4/22.....	68
51.	VAS Effectiveness for LGA Runway 4/22 (Concluded).....	69
52.	VAS Effectiveness for LGA Runway 13/31....	70
53.	VAS Effectiveness for LGA Runway 13/31 (Concluded).....	71
54.	VAS Effectiveness and Arrival Demand Versus Hour for LGA.....	72
55.	VAS Effectiveness for MIA Runway 9/27.....	73
56.	VAS Effectiveness for MIA Runway 9/27 (Concluded).....	74
57.	VAS Effectiveness and Arrival Demand Versus Hour for MIA.....	75
58.	VAS Effectiveness for MSP Runway 11/29....	76

LIST OF ILLUSTRATIONS (CONT'D)

<u>Figure</u>		<u>Page</u>
59.	VAS Effectiveness for MSP Runway 11/29 (Concluded).....	77
60.	VAS Effectiveness for MSP Runway 4/22.....	78
61.	VAS Effectiveness for MSP Runway 4/22 (Concluded).....	79
62.	VAS Effectiveness and Arrival Demand Versus Hour for MSP.....	80
63.	VAS Effectiveness for SEA Runway 16/34....	81
64.	VAS Effectiveness for SEA Runway 16/34 (Concluded).....	82
65.	VAS Effectiveness and Arrival Demand Versus Hour for SEA.....	83
66.	VAS Effectiveness for SFO Runway 1/19.....	84
67.	VAS Effectiveness for SFO Runway 1/19 (Concluded).....	85
68.	VAS Effectiveness for SFO Runway 10/28....	86
69.	VAS Effectiveness for SFO Runway 10/28 (Concluded).....	87
70.	VAS Effectiveness and Arrival Demand Versus Hour for SFO.....	88
71.	VAS Effectiveness for TPA Runway 18/36....	89
72.	VAS Effectiveness for TPA Runway 18/36 (Concluded).....	90
73.	VAS Effectiveness and Arrival Demand Versus Hour for TPA.....	91
74.	VAS Effectiveness for CLE Runway 5/23.....	92
75.	VAS Effectiveness for CLE Runway 5/23 (Concluded).....	93
76.	VAS Effectiveness for CLE Runway 10/28....	94
77.	VAS Effectiveness for CLE Runway 10/28 (Concluded).....	95

LIST OF ILLUSTRATIONS (CONT'D)

<u>Figure</u>		<u>Page</u>
78.	VAS Effectiveness for EWR Runway 4/22.....	96
79.	VAS Effectiveness for EWR Runway 4/22 (Concluded).....	97
80.	VAS Effectiveness for PHL Runway 9/27.....	98
81.	VAS Effectiveness for PHL Runway 9/27 (Concluded).....	99
82.	VAS Effectiveness for PIT Runway 10/28....	100
83.	VAS Effectiveness for PIT Runway 10/28 (Concluded).....	101
84.	VAS Effectiveness for PIT Runway 14/32....	102
85.	VAS Effectiveness for PIT Runway 14/32 (Concluded).....	103
86.	VAS Effectiveness for STL Runway 6/24.....	104
87.	VAS Effectiveness for STL Runway 6/24 (Concluded).....	105
88.	VAS Effectiveness for STL Runway 12/30....	106
89.	VAS Effectiveness for STL Runway 12/30 (Concluded).....	107
90.	Scale Factor for Various Guard-Band Sizes.	109

LIST OF TABLES

<u>Table</u>		<u>Page</u>
1.	AIRPORTS.....	8
2.	RUNWAYS.....	9

1. INTRODUCTION

Before 1970, landing aircraft were required to maintain at least 3-nautical-mile separations under Instrument Flight Rules (IFR) conditions. The interarrival separation standard was based primarily on radar-operating limits and, to a lesser extent, on runway-occupancy limitations. With the introduction of the wide-body jets and the ever increasing number of aircraft operations at the major airports, the potential danger of encountering a wake vortex became more apparent.

Accordingly, the Federal Aviation Administration (FAA) in March 1970 increased the separation standards behind Heavy jets (a Heavy jet has a maximum certificated takeoff weight of at least 300,000 pounds) evolving by 1973 to 5 nautical miles for a following non-Heavy aircraft. The interarrival standards were revised in November 1975 by the addition of another nautical-mile separation at threshold for a following Small aircraft (a Small aircraft has a maximum certificated takeoff weight of less than 12,500 pounds) behind a Heavy or Large aircraft (a Large aircraft has a maximum certificated takeoff weight between 12,500 and 300,000 pounds). These increased separations led to additional delays and decreased the capacity and throughput of the airport system.

The constriction of capacity due to wake-vortex imposed separations is a major contributor to traffic delays (Ref. 1). Many of the high density terminals are currently operations-saturated during periods of peak traffic causing costly delays to passengers and airlines, especially during this period of escalating fuel costs.

The Vortex Advisory System (VAS) has been developed to regain some of the lost capacity. The VAS indicates to controllers when separation standards could be reduced to the pre-March 1970 standard of 3 nautical miles regardless of the leader or follower aircraft type.

The VAS evolved from the detailed study of vortex tracks from approximately 70,000 aircraft, and the correlation of vortex behavior with the ambient winds. Analysis showed that a wind-rose criterion could be used to determine when interarrival separations might be reduced uniformly to 3 nautical miles (Refs. 2 through 6). Usually, vortices either transported away or decayed to an innocuous level. It was found that 1-minute-averaged winds could be used to predict when vortices would not persist near the extended runway centerline. Whenever the wind exceeds a wind-rose criterion, uniform 3-nautical-mile spacings may be used safely. None of the vortices studied would have posed a safety problem even if all interarrival spacings were 3 nautical miles during the time when the wind exceeded the wind-rose criterion.

The VAS has been designed (Refs. 2 and 7) to use the wind-rose criterion. The system compares the measured 1-minute-averaged wind magnitude and direction (with respect to the runway heading) with the wind-rose criterion. The result of the comparison is indicated to an air traffic controller via a simple display; a green light means that 3-nautical-mile spacings may be used for aircraft conducting precision approaches, and a red light means that the normal 3-, 4-, 5-, or 6-nautical-mile spacing should be used during IFR depending on the respective aircraft types.

The wind criterion takes the form of the ellipse (with a semi-major axis of 12.5 knots, aligned with the runway heading; the semi-minor axis is 5.5 knots), which is shown in Figure 1. Based on the study of the vortices, it is asserted that whenever the wind was found to be outside the ellipse, there was no vortex observed which would have precluded using 3-nautical-mile spacings safely for all aircraft. The objective of this study is to answer the question: "How often does the wind at a particular airport exceed the wind-rose or VAS-ellipse criterion?" Further, the results will establish the utility of a VAS at each of the 20 selected airports in the report.

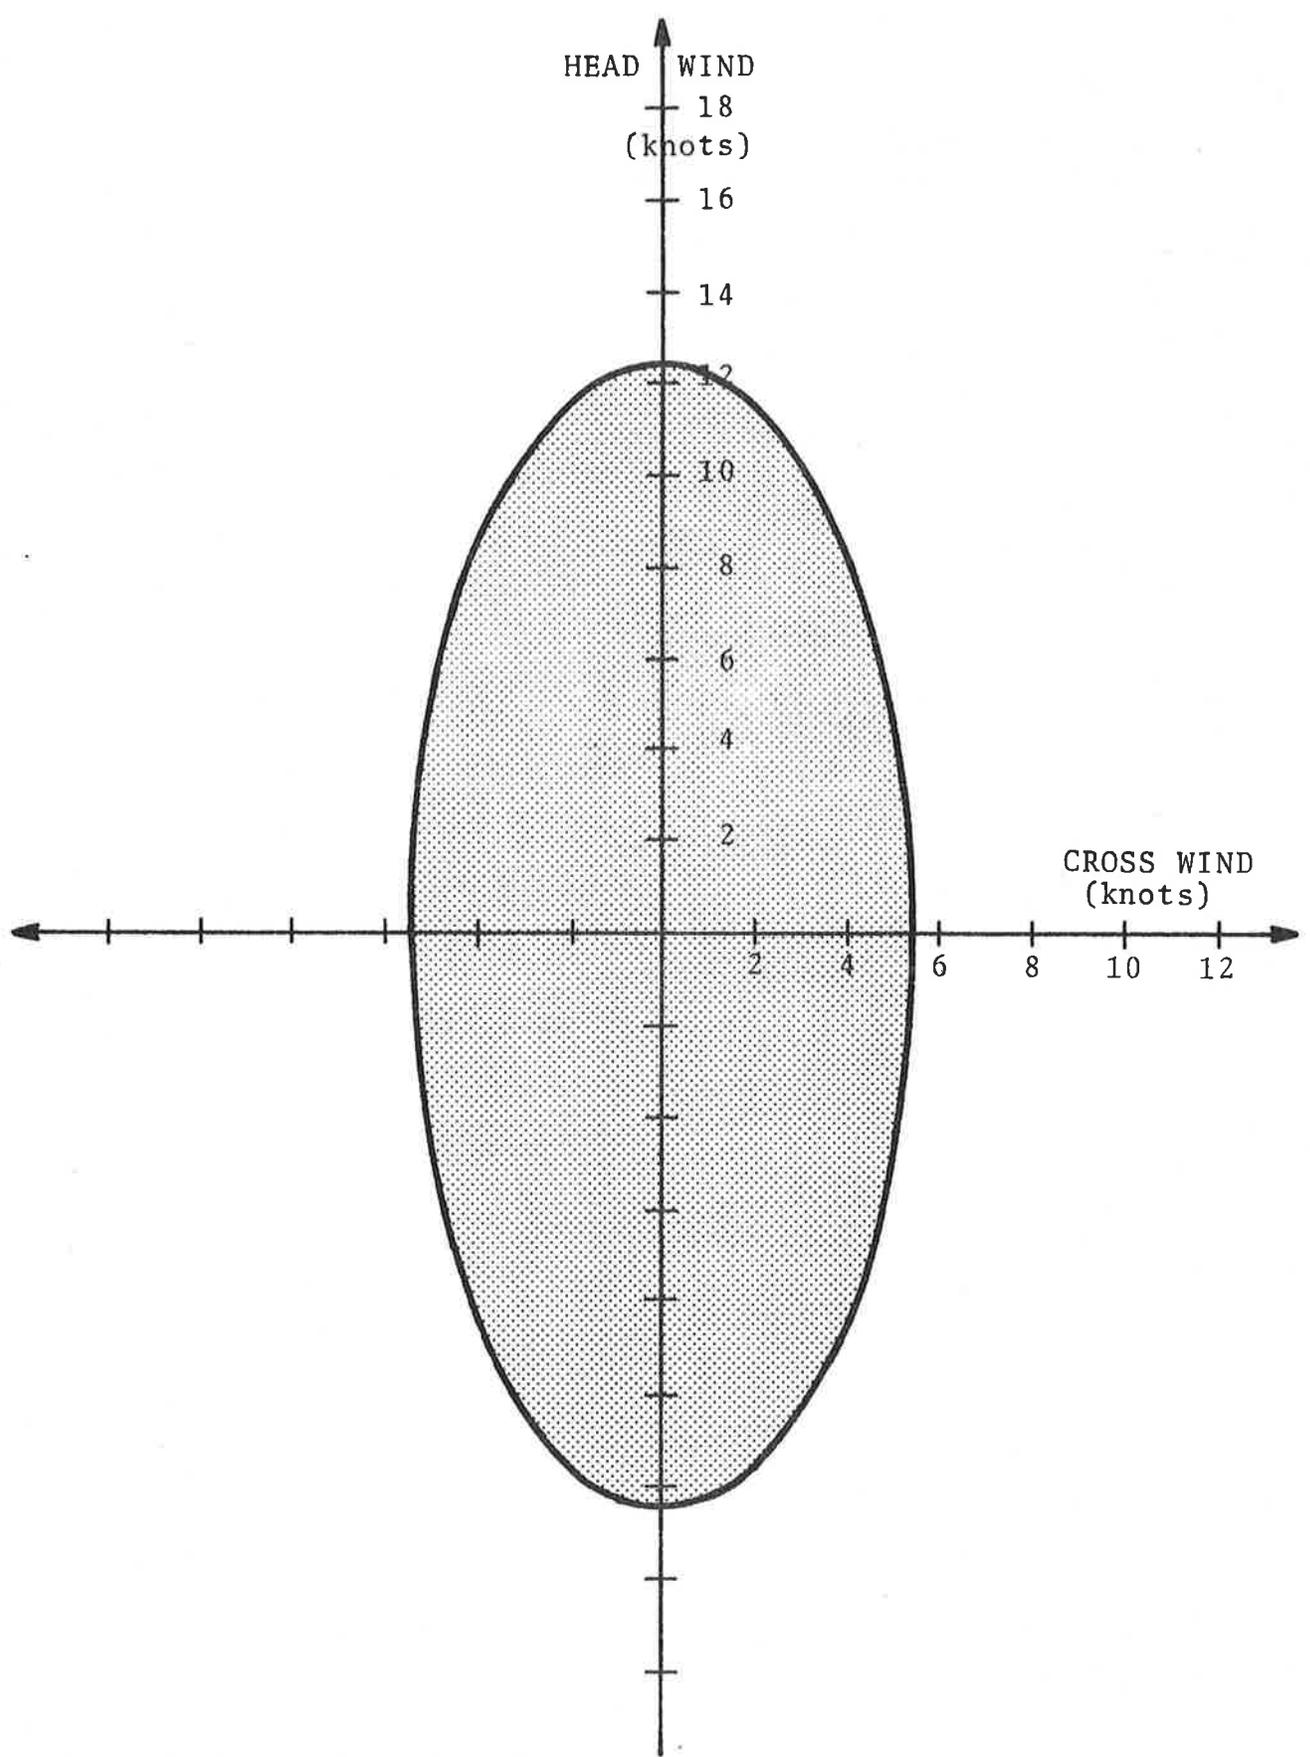


FIGURE 1. VAS ELLIPTICAL WIND CRITERION

Section 2 introduces the term used to measure how often the winds are outside the VAS-elliptical criterion. Section 3 presents the calculations for the 20 airports. Section 4 comments on extending these calculations, and briefly summarizes the report.

2. EFFECTIVENESS

The term "effectiveness" is a measure of the percentage of time that the wind velocity exceeds the wind-rose or elliptical VAS criterion. In other words, "effectiveness" is a measure of how often the uniform 3-nautical-mile interarrival separations can be employed. This does not refer to the effectiveness of the VAS itself since no consideration is given to traffic levels, traffic mixes, and the number of available runways.

The usefulness of the VAS is dependent on (a) the frequency of green lights, (b) the length of their intervals, (c) their correlation with peaks in the traffic demand, and (d) their correlation with IFR arrivals. This report addresses the first dependence (a) by examining the VAS effectiveness on a diurnal and monthly basis. The length of the green-light intervals (b) is the subject of Volume II of this report. Section 3 examines (c). To date, (d) has not been considered directly; there are strong indications that the overall wind data discussed herein are representative of the wind during IFR days.

2.1 WIND DATA

The wind data were obtained from the National Climatic Center, in Ashville, North Carolina, which is a part of the National Oceanic and Atmospheric Administration. The wind velocity was recorded every 3 hours. These data were obtained for 20 airports for the 5-year period from January 1972 through December 1976 on 9-track, EBCDIC, 800 bpi magnetic tape.

The wind measurements correspond to 1-minute-averaged surface observations which were manually recorded 10 minutes before the hour on Meteorological Forms 1-10A and 1-10B by the National Weather Service (NWS) personnel at the various airports. The times are always Local Standard Times. The wind direction is recorded in tens of degrees measured with respect to True North; the wind speed is given to the nearest knot.

2.3 AIRPORTS AND RUNWAYS

A cost/benefits study of 15 airports (Ref. 8) has identified 11 with a VAS implementation benefit-to-cost ratio greater than unity. The top 20 air carrier airports are addressed herein, and are given in Table 1. For convenience, the three-letter airport code will be used throughout the remainder of the report.

For a runway to be considered for instrumenting with a VAS, the runway must be equipped with an Instrument Landing System (ILS). Reference 2 examines the restriction to precision approaches during VAS operations. Table 2 lists the major runways at the 20 airports considered herein.

TABLE 1. AIRPORTS

CODE	NAME	LOCATION
ORD	Chicago-O'Hare International	Chicago IL
ATL	William B. Hartsfield Atlanta Int'l	Atlanta GA
BOS	Logan International	Boston MA
DCA	Washington National	Washington DC
DEN	Stapleton International	Denver CO
DFW	Dallas-Fort Worth Regional	Dallas-Ft Worth TX
DTW	Detroit Metropolitan Wayne County	Detroit MI
JFK	John F. Kennedy International	New York NY
LAX	Los Angeles International	Los Angeles CA
LGA	LaGuardia	New York NY
MIA	Miami International	Miami FL
MSP	Minneapolis-St. Paul International	Minneapolis MN
SEA	Seattle-Tacoma International	Seattle WA
SFO	San Francisco International	San Francisco CA
TPA	Tampa International	Tampa FL
CLE	Cleveland-Hopkins International	Cleveland OH
EWR	Newark International	Newark NJ
PHL	Philadelphia International	Philadelphia PA
PIT	Greater Pittsburgh International	Pittsburgh PA
STL	Lambert-St. Louis International	St. Louis MO

TABLE 2. RUNWAYS

AIRPORT	RUNWAY	LENGTH/WIDTH (feet/feet)	ILS
ORD	4L/22R	7500/150	Yes
	4R/22L	8071/150	Yes
	9L/27R	7416/150	Yes
	9R/27L	10141/150	Yes
	14L/32R	10003/150	Yes
	14R/32L	11600/200	Yes
	18/36	5341/150	No
ATL	8/26	10000/150	Yes
	9L/27R	8000/150	No
	9R/27L	9000/150	Yes
BOS	4L/22R	7860/150	No
	4R/22L	10001/150	Yes
	9/27	7000/150	No
	15L/33R	2468/125	No
	15R/33L	10081/150	Yes
DCA	3/21	4724/150	No
	15/33	5212/200	No
	18/36	6870/200	Yes
DEN	7/25	5020/75	No
	8L/26R	7926/150	No
	8R/26L	10004/150	Yes
	17L/35R	12000/200	Yes
	17R/35L	11500/150	Yes
	17C/35C	6480/100	No
DFW	13L/31R	9000/200	Yes
	17L/35R	11387/200	Yes
	17R/35L	11387/200	Yes
DTW	3L/21R	10500/200	Yes
	3C/21C	8500/200	No
	9/27	8702/200	Yes
JFK	4L/22R	11351/150	Yes
	4R/22L	8400/150	Yes
	13L/31R	10001/150	Yes
	13R/31L	14572/150	Yes
	14/32	2762/75	No
LAX	6L/24R	8925/150	Yes
	6R/24L	10285/150	Yes
	7L/25R	12090/150	Yes
	7R/25L	12000/200	Yes
	8/26	3000/75	No

TABLE 2. RUNWAYS (CONT.)

AIRPORT	RUNWAY	LENGTH/WIDTH (feet/feet)	ILS
LGA	4/22	6999/150	Yes
	13/31	6999/150	Yes
	14/32	2000/75	No
MIA	9L/27R	10500/200	Yes
	9R/27L	9350/150	Yes
	12/30	9601/150	No
MSP	4/22	8268/150	Yes
	11L/29R	8201/150	Yes
	11R/29L	10000/200	Yes
SEA	16L/34R	11900/150	Yes
	16R/34L	9424/150	Yes
	17/35	2750/75	No
SFO	1L/19R	7000/200	No
	1R/19L	9500/200	Yes
	10L/28R	11870/200	Yes
	10R/28L	10600/200	Yes
TPA	9/27	7000/150	No
	18L/36R	8300/150	Yes
	18R/36L	8700/150	Yes
CLE	5L/23R	6242/200	No
	5R/23L	9000/150	Yes
	10L/28R	6014/150	Yes
	10R/28L	3276/75	No
	18L/36R	5015/150	No
	18R/36L	6411/150	No
EWR	4L/22R	8199/150	Yes
	4R/22L	9810/150	Yes
	11/29	6796/150	No
PHL	9L/27R	9500/150	Yes
	9R/27L	10499/200	Yes
	17/35	5459/150	No
PIT	10L/28R	10502/150	Yes
	10C/28C	10101/150	Yes
	14/32	8101/150	Yes
	5/23	3939/150	No

TABLE 2. RUNWAYS (CONT.)

AIRPORT	RUNWAY	LENGTH/WIDTH (feet/feet)	ILS
STL	6/24 12L/30R 12R/30L 17/35	7602/200 6621/150 10018/200 6000/150	Yes No Yes No

3. EFFECTIVENESS VALUES

To calculate the effectiveness of the VAS, the dual elliptical wind criterion is aligned with the direction of the runway heading (e.g., the semi-major axis is aligned with the runway heading) and the number of 3-hourly datum points falling (a) within the inner ellipse (VAS red), (b) outside the outer ellipse (VAS green), and (c) between the two ellipses are totaled, respectively. The percentage effectiveness is, as defined earlier, the percentage outside the outer ellipse (b) plus one-half the percentage between the two ellipses (c).

This section addresses the effectiveness values for the 20 airports viewed on a monthly and an hourly basis. For the reader's convenience, the graphs for Chicago O'Hare are shown and discussed within Section 3.1, and all the other graphs for the 19 airports are collected at the end of the section.

3.1 CHICAGO-O'HARE INTERNATIONAL AIRPORT

Chicago O'Hare (ORD) has three sets of parallel runways (4/22, 9/27, and 14/32) and a short runway usually reserved for general aviation (18/36). The calculations consider 4L/22R and 4R/22L as one runway (and similarly for all other parallel runways).

Figure 3 shows the effectiveness on ORD runway 4/22 by month (top graph) and by hour (bottom graph). The solid lines are only for guidance. As an example, the 60-percent effectiveness indicated for February is an average over the eight 3-hourly readings for each day in February for the 5 years from 1972 to 1976 (142 days) or a total of 1136 readings. Similarly, the 59-percent effectiveness for 1500 hours Local Time is an average over the wind data recorded at 1500 hours, a total of 1872 readings.

Figure 4 shows the effectiveness on runway 4/22 by month and hour. The 40-percent effectiveness for April at midnight is an average of the 30 days in April for the 5-year period; the 40-percent effectiveness is an average of 150 separate effectiveness

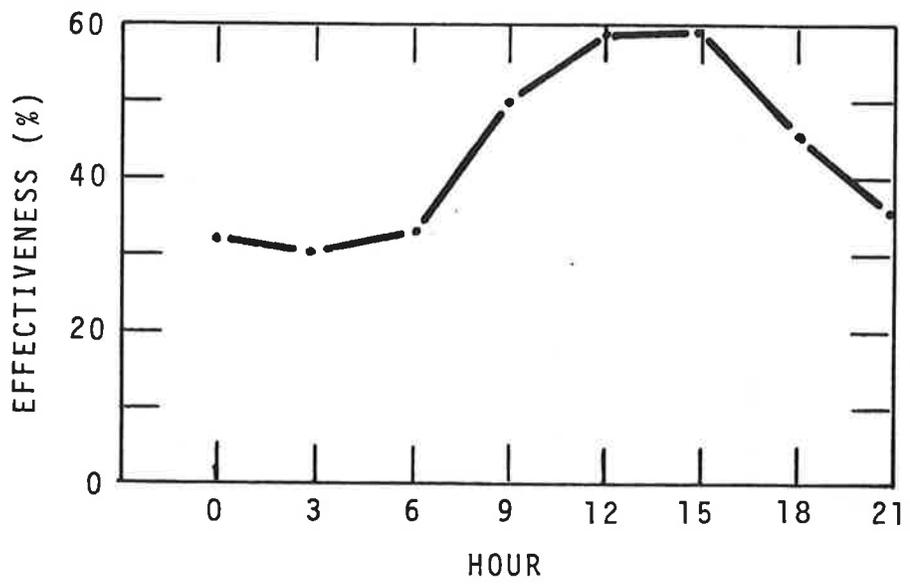
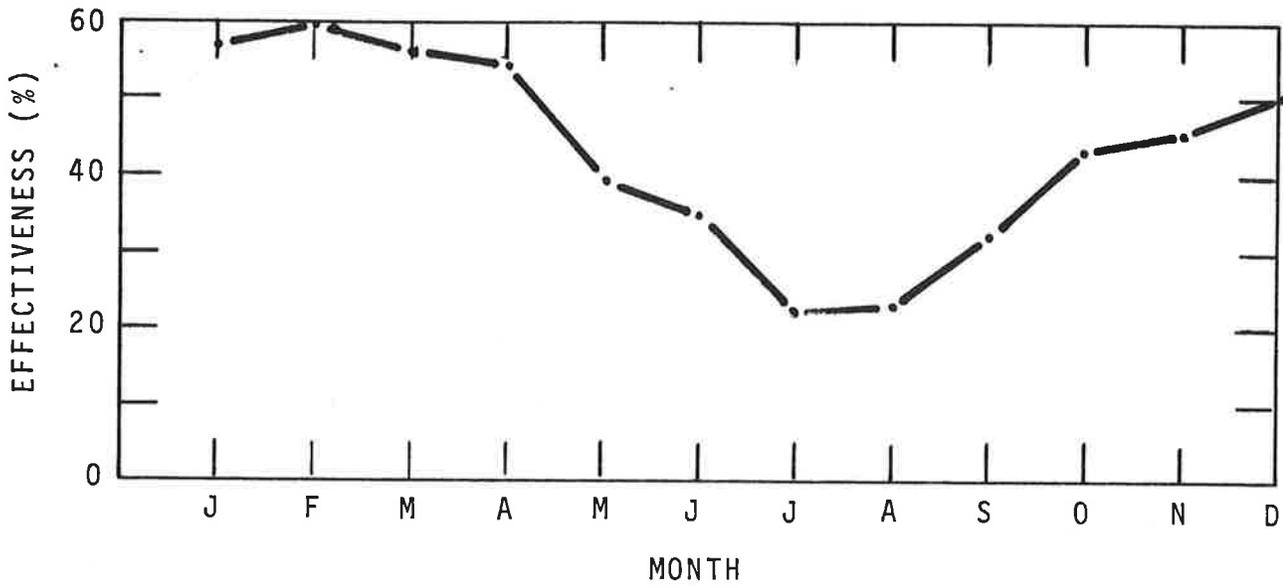


FIGURE 3. VAS EFFECTIVENESS FOR ORD RUNWAY 4/22

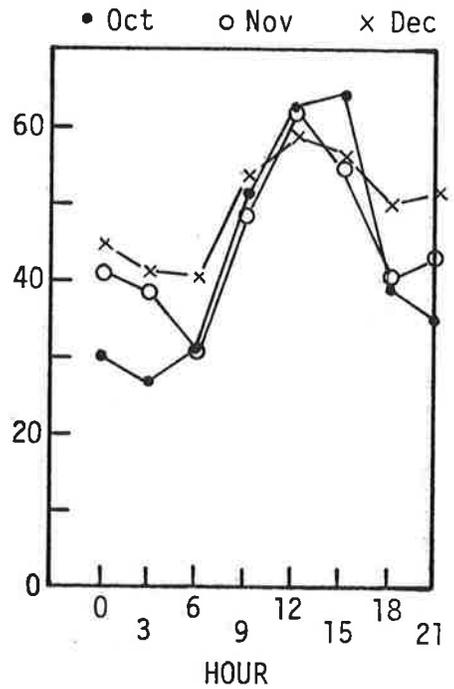
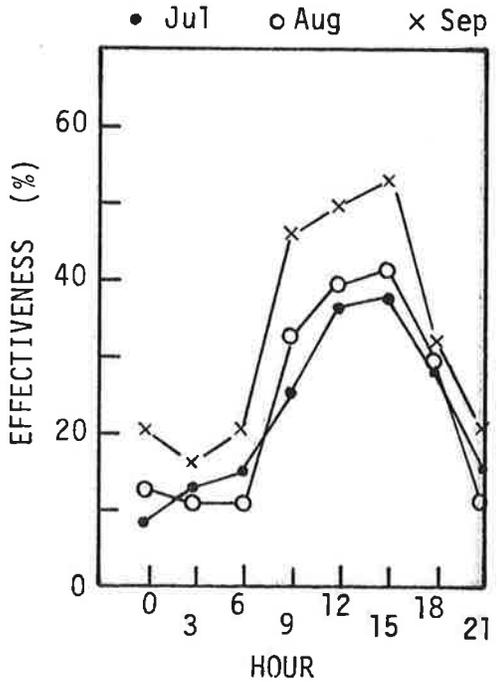
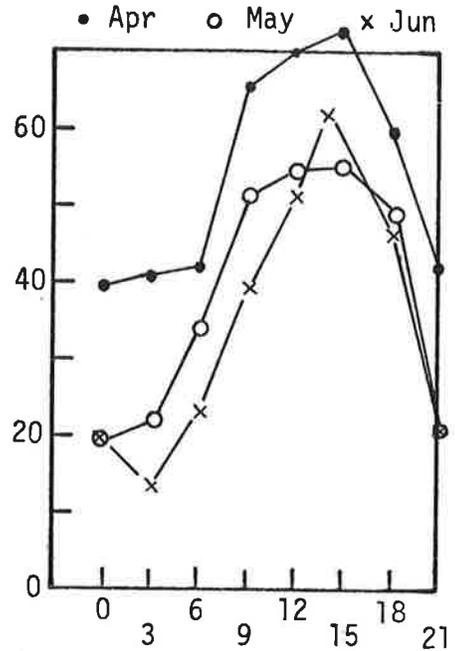
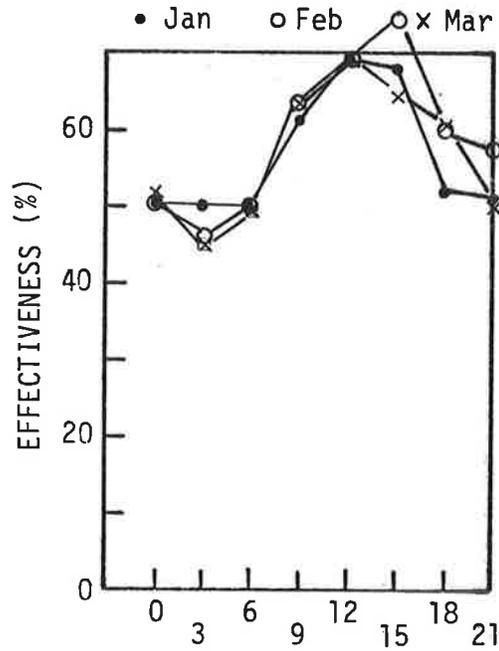


FIGURE 4. VAS EFFECTIVENESS FOR ORD RUNWAY 4/22 (CONCLUDED)

values. Averaging the 8 values for April gives the 53-percent effectiveness shown in Figure 3 (top graph); averaging the 12 values for midnight Local Time gives the 32-percent effectiveness value shown in Figure 3 (bottom graph).

Figure 3 (top graph) shows the expected variation of effectiveness with the month of the year. The winter months at ORD are, in general, relatively windy leading to an anticipated maximum effectiveness in February. The summer months in contrast are relatively mild with the attendant lower winds and hence lower VAS effectiveness.

Figure 3 (bottom graph) shows that the VAS effectiveness peaks in the early afternoon and reaches a minimum in the early morning hours. The temporal dependence is sinusoidal in nature with a mean or d-c level of approximately 45-percent effectiveness.

Figure 4 shows these same trends. The effectiveness values vary from a low of 9 percent at midnight in July to a high of 75 percent at 1500 hours in February. The four graphs show that the VAS effectiveness curves correlate with the season.

Figures 5 to 8 contain the effectiveness data for runways 9/27 and 14/32. The trends are the same as for runway 4/22. Including all three runway pairs, the effectiveness values vary from a low of 9 percent at midnight in July (runway 4/22) to a high of 83 percent at 1500 hours in April (runway 14/32).

An important consideration is the degree of correlation of peaks in VAS effectiveness with the arrival demand. Figure 9 shows the VAS effectiveness curve (solid dots and line) and an arrival demand curve (open circles and broken line) for ORD as a function of Local Time. The effectiveness curve is an average for the three sets of parallel runways (4/22, 9/27 and 14/32). The number of scheduled arrivals was obtained from the Official Airline Guide (Ref. 9) for the first Tuesday in November 1977. Although the number of arrivals would be different if another day or season or year were used, the shape for the curve would remain about the same.

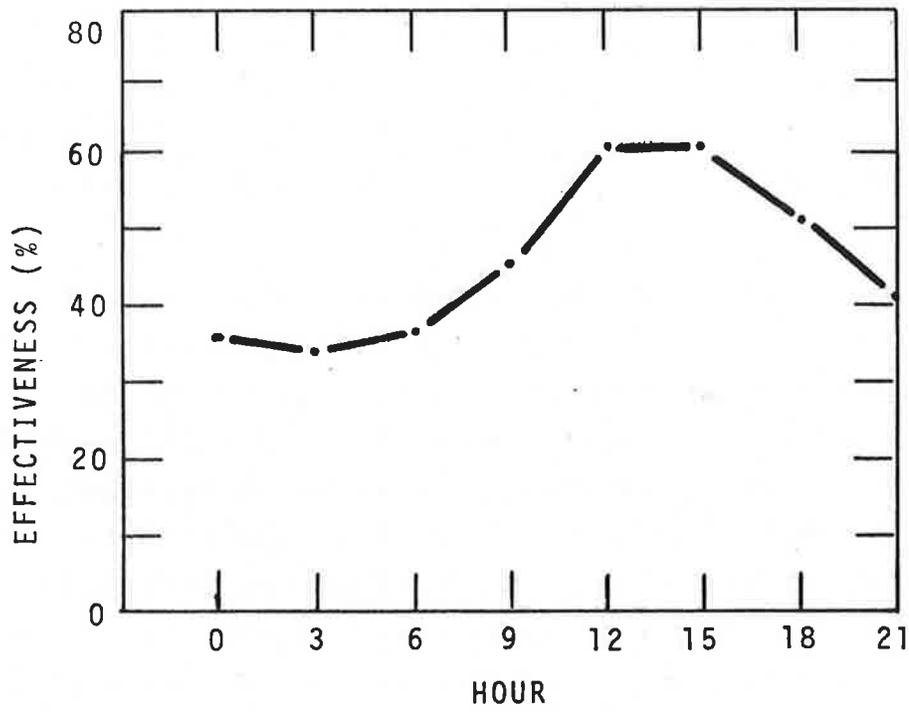
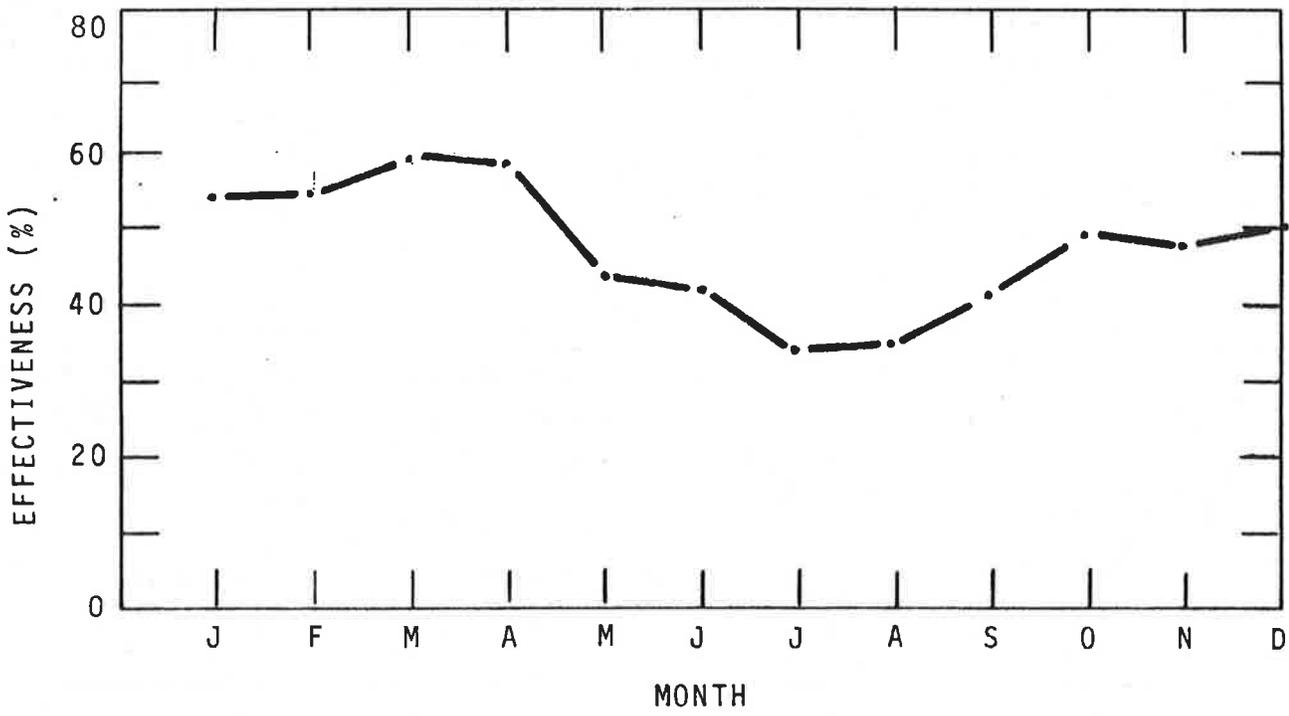


FIGURE 5. VAS EFFECTIVENESS FOR ORD RUNWAY 9/27

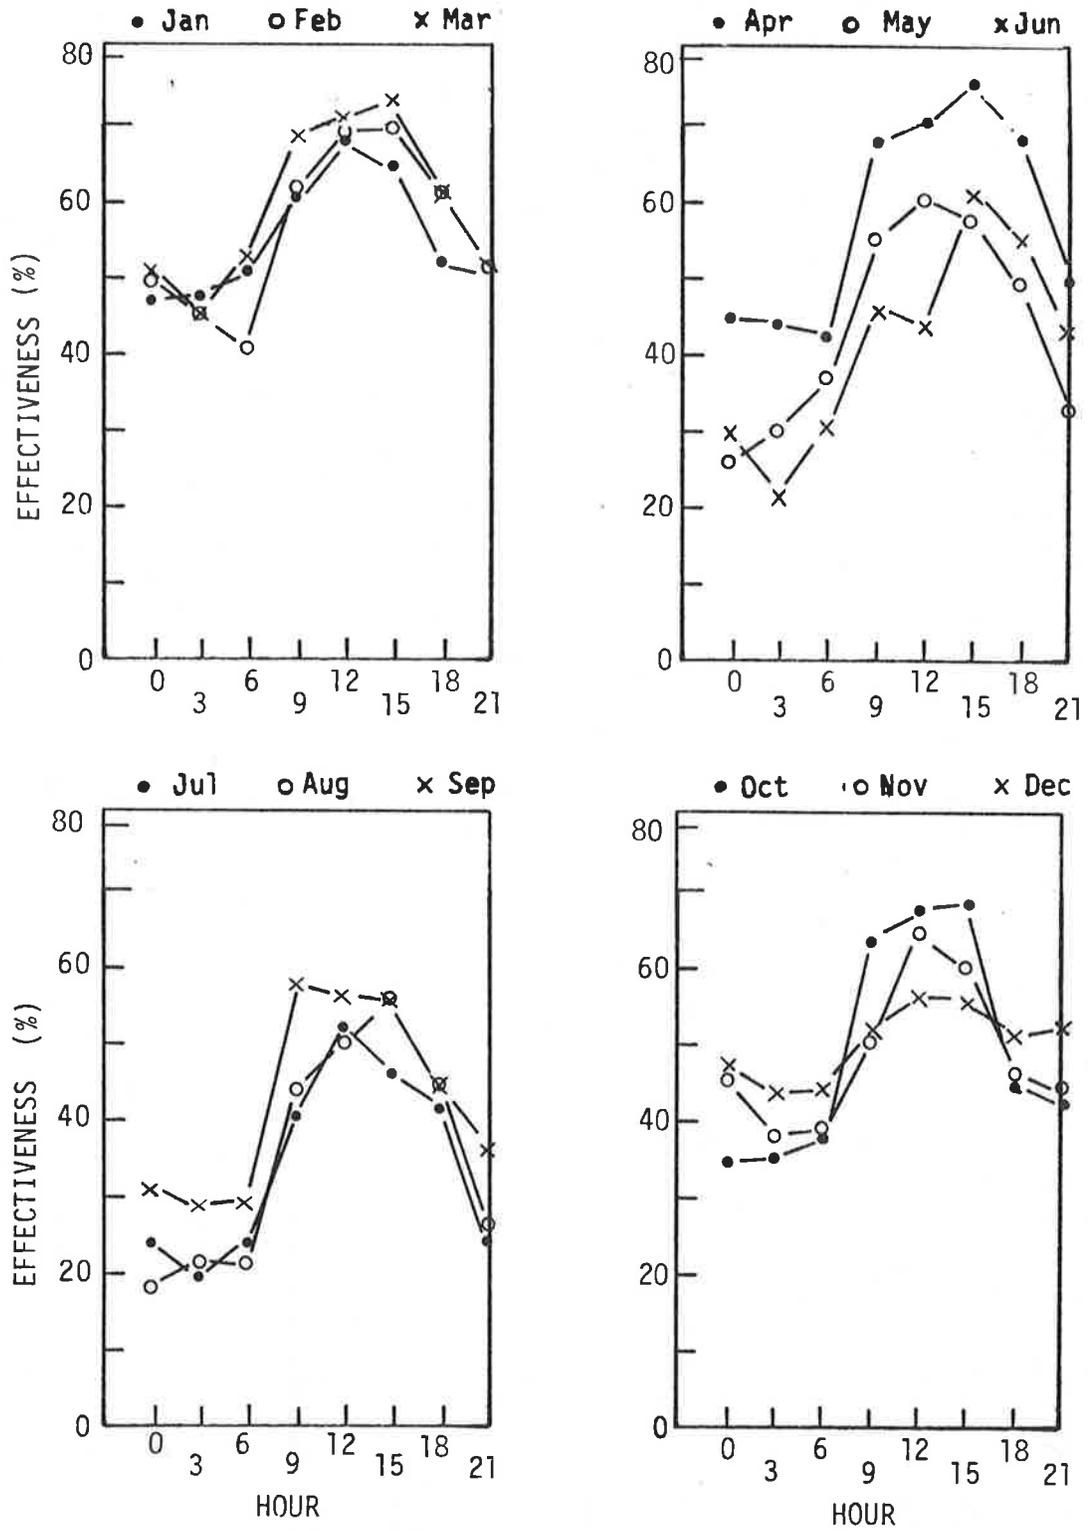


FIGURE 6. VAS EFFECTIVENESS FOR ORD RUNWAY 9/27 (CONCLUDED)

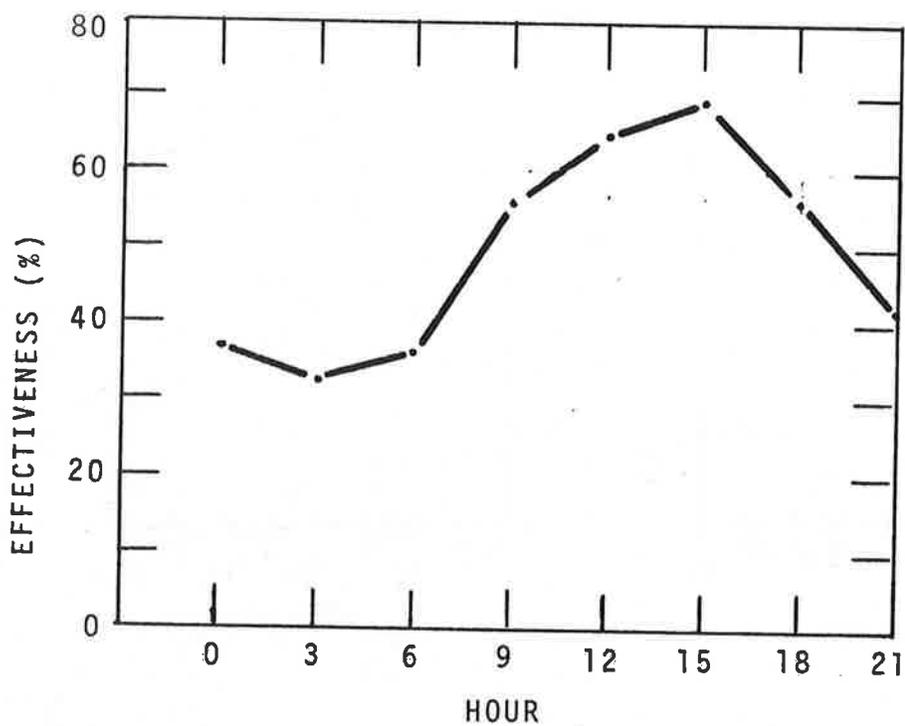
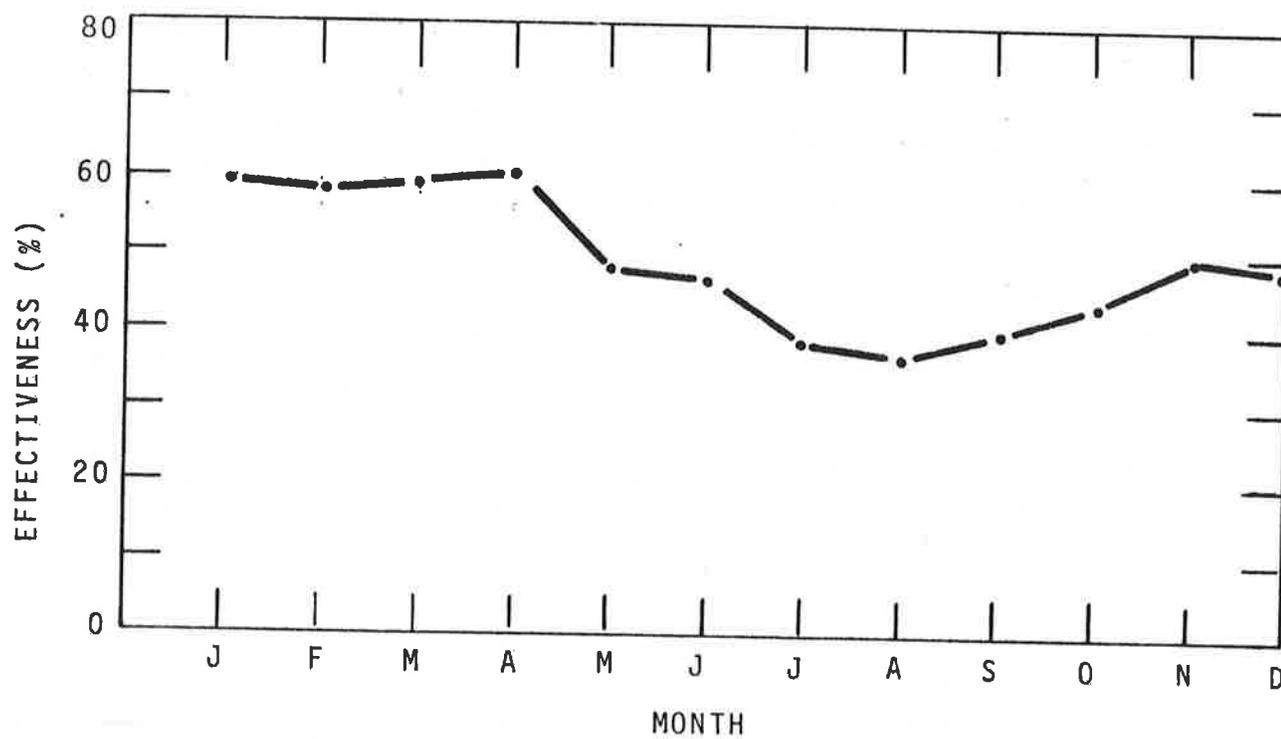


FIGURE 7. VAS EFFECTIVENESS FOR ORD RUNWAY 14/32

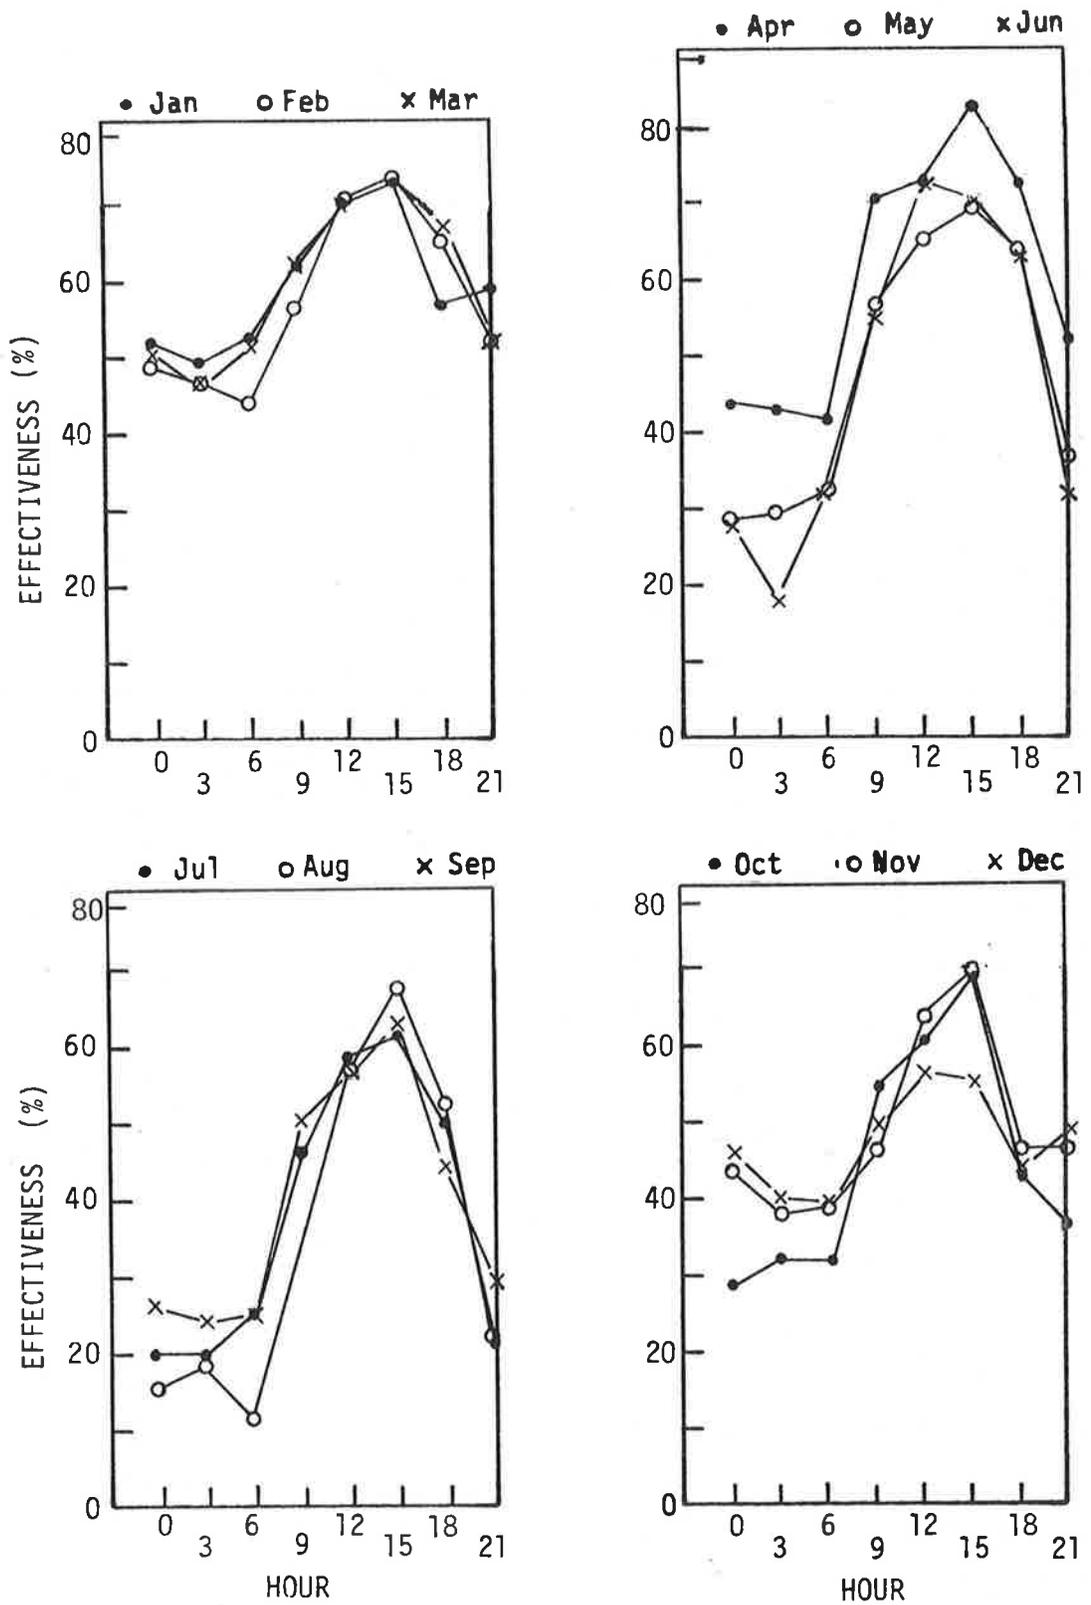


FIGURE 8. VAS EFFECTIVENESS FOR ORD RUNWAY 14/32 (CONCLUDED)

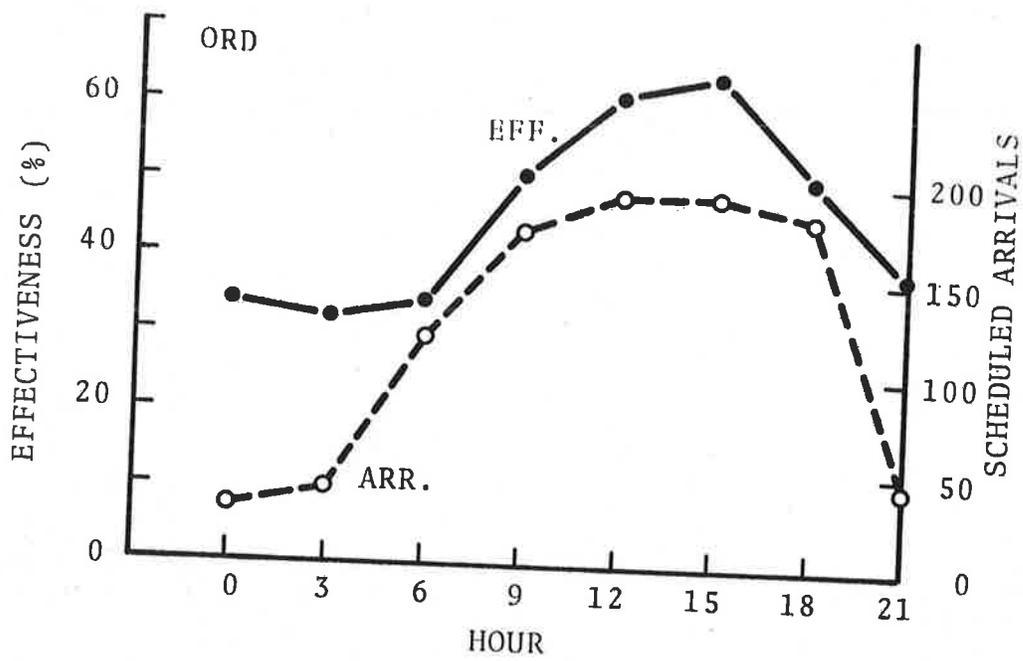


FIGURE 9. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR ORD

The important point of Figure 9 is that the VAS effectiveness peaks with the arrival demand at ORD. The relatively low effectiveness in the early morning hours is not significant since the airport has more than enough air/land space to accommodate the demand with little or no delay. Non-weather delays tend to build up in the early afternoon to early evening time period at ORD. The VAS effectiveness is seen to follow the arrival demand, and the higher percentages occur when the delays are most prevalent. Averaged over the whole day, the effectiveness at ORD is 48 percent; averaged over the afternoon hours (1200 to 1800), the effectiveness is 69 percent.

3.2 WILLIAM B. HARTSFIELD ATLANTA INTERNATIONAL AIRPORT

The William B. Hartsfield Atlanta International Airport (ATL) has one set of parallel runways, 9/27, and runway 8/26. Figures 10 to 13 show the effectiveness calculated for these runways. The effectiveness values range from a low of 2 percent at midnight in August (runway 8/26) to a high of 63 percent at 1500 hours in April (runway 8/26).

Figure 14 shows the VAS effectiveness and number of scheduled arrivals at ATL as a function of the hour. ATL has a double hump arrival demand curve, but the VAS effectiveness is greatest when the demand is greatest.

3.3 LOGAN INTERNATIONAL AIRPORT

Logan International Airport (BOS) in Boston has two sets of parallel runways (4/22 and 15/33) and runway 9/27. Figures 15 to 20 show the effectiveness values which range from a low of 18 percent at midnight in July (runway 4/22) to a high of 79 percent at 1500 hours in April (runway 4/22). During the winter months, the VAS effectiveness rarely drops below 60 percent.

As can be seen in Figure 21, the VAS-effectiveness maximum correlates with the maximum number of scheduled arrivals. BOS has a relatively high average effectiveness. The peak effectiveness occurs at 1500 hours when the arrival demand is greatest.

3.4 WASHINGTON NATIONAL AIRPORT

Washington National Airport (DCA) does not service Heavy jets, but there is a large proportion of Small aircraft mixed with Large aircraft. The VAS may help to minimize delays by permitting the Small aircraft to land 3 nautical miles behind the Large aircraft. DCA has one main ILS runway, 18/36, and two shorter non-ILS runways, 3/21 and 15/33. Figures 22 and 23 show the effectiveness for runway 18/36; the values range from a low of 5 percent at 0300 in July to a high of 50 percent at 1500 hours in February.

As can be seen in Figure 24, the VAS effectiveness and the number of scheduled arrivals have similar trends. The two curves track each other with the maximum values occurring in the early afternoon and the minimum values occurring in the early morning.

3.5 STAPLETON INTERNATIONAL AIRPORT

Stapleton International Airport (DEN) in Denver has one set of triple parallel runways, 17/35; one set of double parallel runways, 8/26; and one short runway, 7/25. Two of the runways in the triple set and one of the double set are ILS-equipped. Figures 25 through 28 show the calculated VAS effectiveness for these ILS runways; the values range from a low of 6 percent at 0600 in July (runway 17/35) to a high of 62 percent at 1800 hours in March (runway 17/35).

Figure 29 shows the VAS effectiveness and the number of scheduled arrivals as a function of the hour. Because of its location, traffic in the mid-morning to mid-afternoon time period may be greatest since the aircraft stopping at DEN are on their way to both coasts. The effectiveness curve peaks later (1800 hours), and DEN is the only instance where the two maximums do not occur at the same hour.

3.6 DALLAS-FORT WORTH REGIONAL AIRPORT

The Dallas-Fort Worth Regional Airport (DFW) has one set of parallel runways (17-35) in addition to 13L/31R. All are ILS-equipped. Figures 30 to 33 show the calculated effectiveness values for these runways; the values range from a low of 5 percent at midnight to 0300 in August (runway 17/35) to a high of 76 percent at noon in January, February, and March (runway 13/31).

Figure 34 shows that when the number of scheduled arrivals is greatest (0900 to 1800), the calculated VAS effectiveness is also greatest.

3.7 DETROIT METROPOLITAN WAYNE COUNTY AIRPORT

The Detroit Metropolitan Wayne County Airport (DTW) has two ILS-equipped runways, 3L/21R and 9/27. Runway 3C/21C is not ILS equipped. Figures 35 to 38 show the effectiveness values for runways 3/21 and 9/27; the values range from a low of 11 percent at midnight in August (runway 3/21) to a high of 83 percent at 1500 hours in April (runway 3/21).

The hourly variation of VAS effectiveness and number of scheduled arrivals are shown in Figure 39.

3.8 JOHN F. KENNEDY INTERNATIONAL AIRPORT

The John F. Kennedy International Airport (JFK) in Jamaica, New York, has two sets of parallel runways, 4/22 and 13/31, and a short runway for general aviation use, 14/32. Only the parallels are ILS-equipped. Figures 40 to 43 show the calculated VAS effectiveness for the two sets of parallel runways; the values range from a low of 19 percent at 0300 in August (runway 4/22) to a high of 88 percent at 1500 hours in April (runway 4/22).

Figure 44 shows the VAS effectiveness and the number of scheduled arrivals as a function of the hour. JFK exhibits a distinct arrival peak at 1500 hours; the average VAS effectiveness peaks at about 75 percent at 1500 hours.

3.9 LOS ANGELES INTERNATIONAL AIRPORT

Los Angeles International Airport (LAX) has two sets of parallel runways (6/24 and 7/25) and one short runway (8/26). The parallels are ILS-equipped. Figures 45 to 48 show the calculated effectiveness for these runways; the values range from a low of about 1 percent in the early morning hours (0300 to 0600) in the spring and summer to a high of 43 percent at noon in April (runway 6/24). The VAS effectiveness values for LAX are the lowest of the 20 airports considered.

Figure 49 shows the average VAS effectiveness and the number of scheduled arrivals at LAX as a function of the time of day. The arrival demand has a double-peak spectrum peaking at 0900 and 1800 hours. The calculated VAS effectiveness peaks at 1500 hours, and the effectiveness value is not great compared with values for other airports.

3.10 LAGUARDIA AIRPORT

LaGuardia Airport (LGA) in East Elmhurst, New York, has three runways: 4/22 and 13/31, which are ILS-equipped; and 14/32, which is not. LGA has an aircraft mix of Large and Small; A-300s may soon be routinely added to the Eastern Airlines operations. Figures 50 to 53 show the calculated VAS effectiveness for runways 4/22 and 13/31; the values range from a low of 19 percent at 0300 in August (runway 4/22) to a high of 83 percent at 1500 hours in April (runway 4/22).

The effectiveness and the number of scheduled arrivals exhibit a similar temporal behavior as shown in Figure 54.

3.11 MIAMI INTERNATIONAL AIRPORT

Miami International Airport (MIA) has one set of east/west parallel runways, 9/27, and runway 12/30. The parallel runways are ILS-equipped. Figures 55 and 56 show the effectiveness values for runways 9/27; the values range from a low of 2 percent at 0300 in September to a high of 75 percent at noon in March and again at 1500 hours in April.

As shown in Figure 57, the plots of the hourly behavior of both the VAS effectiveness and the number of scheduled arrivals are very much alike.

3.12 MINNEAPOLIS-ST. PAUL INTERNATIONAL AIRPORT

The Minneapolis-St. Paul International Airport (MSP) has one set of parallel runways, 11/29, and runway 4/22. All the runways are ILS-equipped. Figures 58 to 61 show the VAS effectiveness for these runways; the values range from a low of 18 percent at 0300 in July (runway 4/22) to a high of 76 percent at 1500 hours in March (runway 4/22).

Figure 62 shows the averaged VAS effectiveness and the number of scheduled arrivals as a function of the hour. Although the arrival demand curve is a double hump, the peaks of the two curves occur at 1500 hours.

3.13 SEATTLE-TACOMA INTERNATIONAL AIRPORT

Seattle-Tacoma International Airport (SEA) has one set of ILS-equipped parallel runways, 16/34, and one short runway, 17/35, which does not have an ILS. Figures 63 and 64 show the calculated VAS effectiveness for runways 16/34; the values range from a low of 4 percent at 0600 hours in August to a high of 49 percent at noon in January.

Figure 65 shows the hourly behavior of both the averaged VAS effectiveness and the number of scheduled arrivals. Their curves exhibit a broad peak, and track each other.

3.14 SAN FRANCISCO INTERNATIONAL AIRPORT

San Francisco International Airport (SFO) has two sets of parallel runways, 1/19 and 10/28. Three of the runways are ILS-equipped. Figures 66 to 69 show the calculated VAS effectiveness values for runways 1/19 and 10/28; the values range from a low of 5 percent at 0300-0600 in September (runway 10/28) to a high of 98 percent at 1500 hours in August (runway 1/15). The effectiveness

values for SFO in the mid-afternoon are the highest of the 20 airports considered.

Figure 70 shows the averaged VAS effectiveness and the number of scheduled arrivals as a function of hour. The arrival demand is relatively constant during the daylight hours with the VAS effectiveness maximizing at 1500 hours.

3.15 TAMPA INTERNATIONAL AIRPORT

Tampa International Airport (TPA) has one set of ILS-equipped parallel runways, 18/36, and one non-ILS-equipped runway, 9/27. Figures 71 and 72 show the calculated VAS effectiveness for runway 18/36; the values range from a low of 4 percent at 0300 in September to a high of 79 percent at 1500 hours in May.

Figure 73 shows the hourly behavior of both the VAS effectiveness and the number of scheduled arrivals. The arrival demand peaks at 1200 hours and the effectiveness peaks at 1500 hours, and the effectiveness is greatest when the demand is greatest.

3.16 CLEVELAND-HOPKINS INTERNATIONAL AIRPORT

Cleveland-Hopkins International Airport (CLE) has three sets of parallel runways: 5/23, 10/28, and 18/36. However, 5R/23L and 10L/28R both have ILS. Figures 72 to 77 show the effectiveness values; the values range from a low of 8 percent at 0300 hours in August (runway 5/23) to a high of 81 percent at 1500 hours in April (runway 10/28).

3.17 NEWARK INTERNATIONAL AIRPORT

Newark International Airport (EWR) has one set of ILS-equipped parallel runways, 4/22, and one non-ILS-equipped runway, 11/29. Figures 78 and 79 show the calculated VAS effectiveness values for runways 4/22. The values range from a low of 10 percent at 0300 hours in July to a high of 76 percent at 1500 hours in April.

3.18 PHILADELPHIA INTERNATIONAL AIRPORT

Philadelphia International Airport (PHL) has one set of ILS-equipped parallel runways, 9/27, and one non-ILS-equipped runway, 17/35. Figures 80 and 81 show the calculated VAS effectiveness values for runways 9/27; the values range from a low of 18 percent at midnight in August to a high of 71 percent at 1500 hours in April.

3.19 GREATER PITTSBURGH INTERNATIONAL AIRPORT

Greater Pittsburgh International Airport (PIT) has one set of ILS-equipped parallel runways, 10/28, one ILS-equipped runway, 14/32, and one runway without ILS equipment, 5/23. Figures 82 to 85 show the VAS effectiveness values for runways 10/28 and 14/32; the values range from a low of 5 percent at 0300 hours in August (runway 10/28) to a high of 70 percent at 1500 hours in April (runway 10/28).

3.20 LAMBERT-ST. LOUIS INTERNATIONAL AIRPORT

Lambert-St. Louis International Airport (STL) has one set of parallel runways, 12/30, one of which is ILS-equipped; runway 6/24 which is ILS-equipped, and runway 17/35 which is not ILS-equipped. Figures 86 to 89 show the calculated VAS effectiveness values for runways 6/24 and 12/30; the values range from a low of 10 percent at 0600 hours in August (runway 12/30) to a high of 76 percent at 1500 hours in March (runway 6/24).

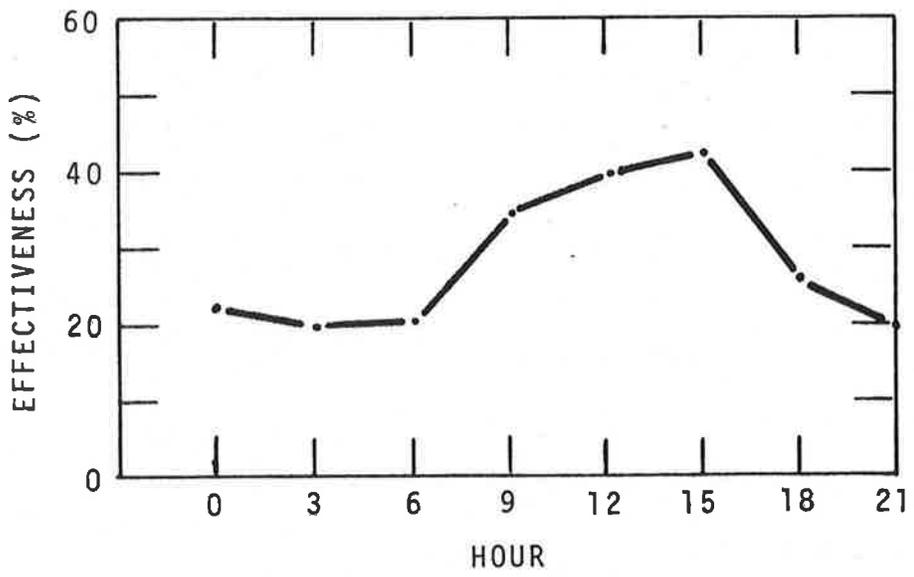
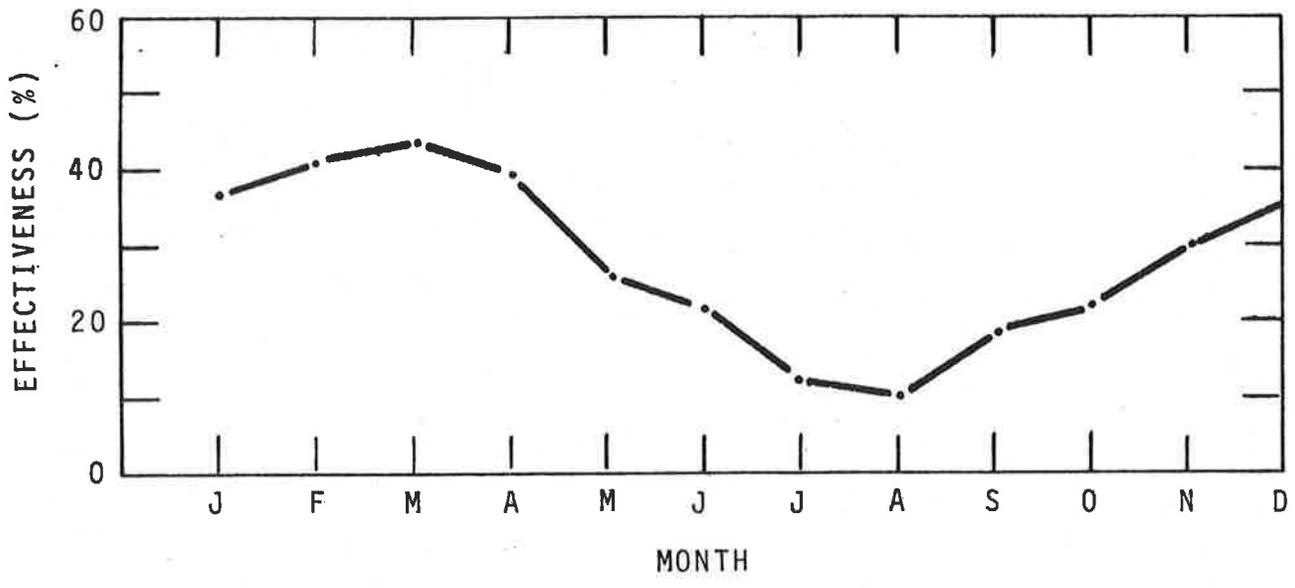


FIGURE 10. VAS EFFECTIVENESS FOR ATL RUNWAY 9/27

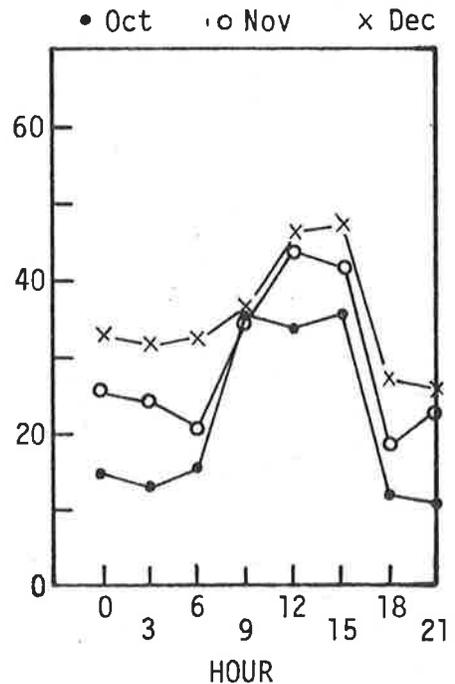
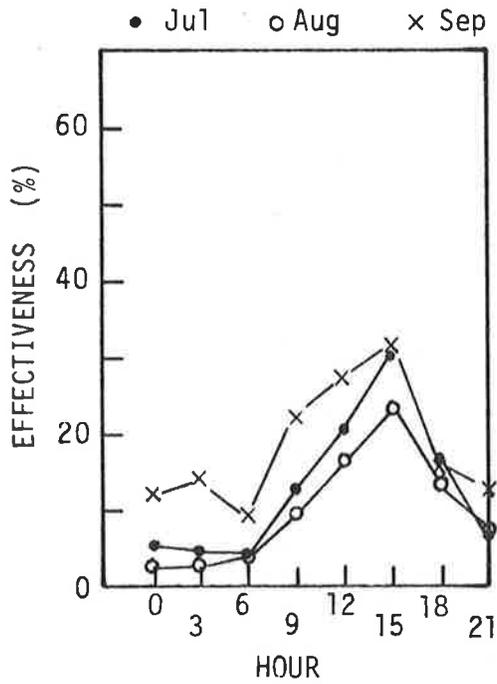
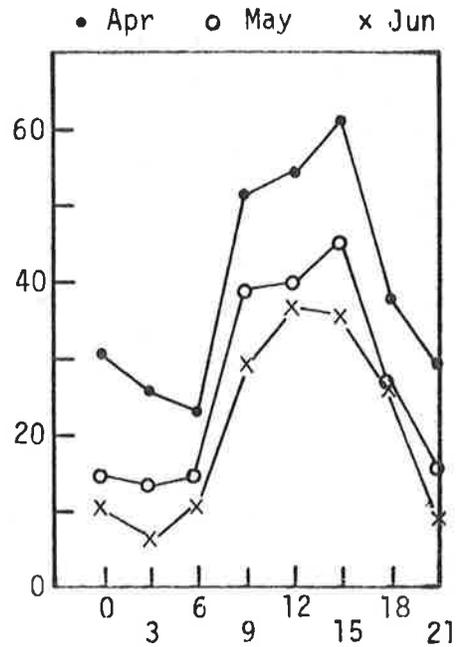
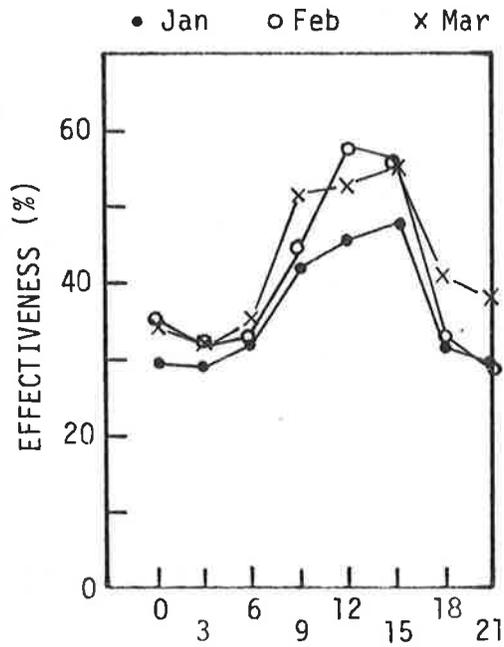


FIGURE 11. VAS EFFECTIVENESS FOR ATL RUNWAY 9/27 (CONCLUDED)

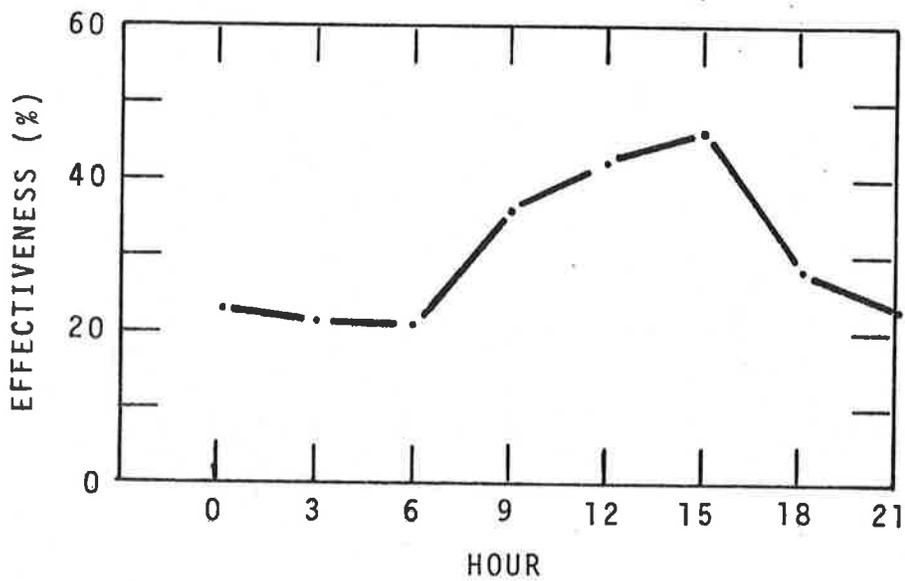
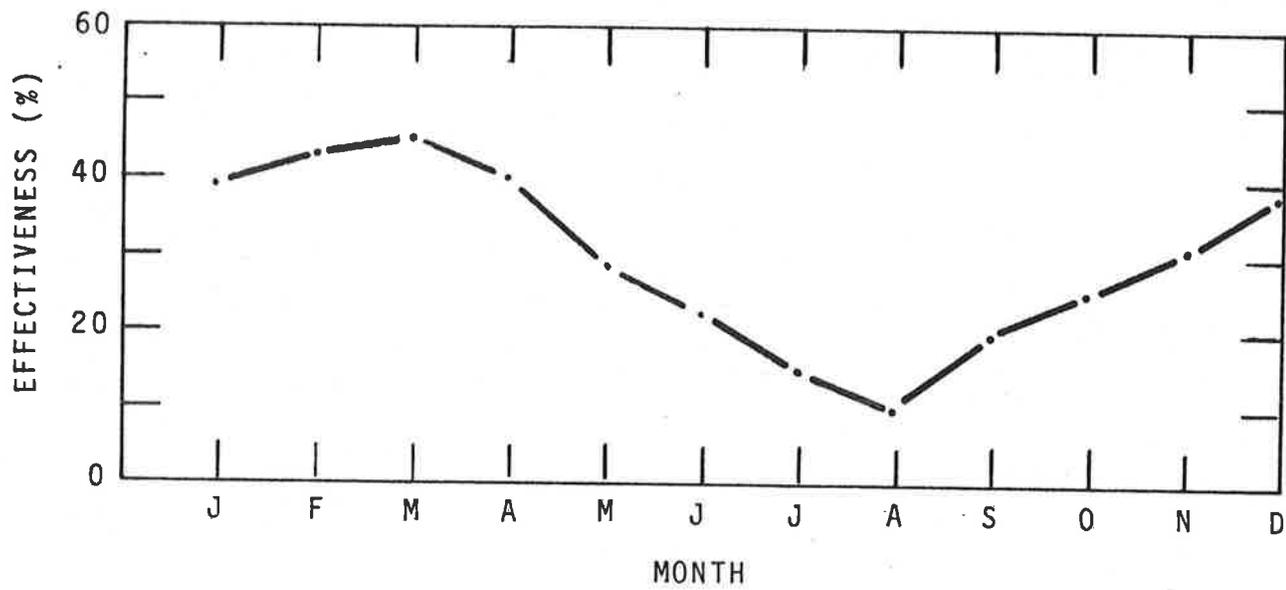


FIGURE 12. VAS EFFECTIVENESS FOR ATL RUNWAY 8/26

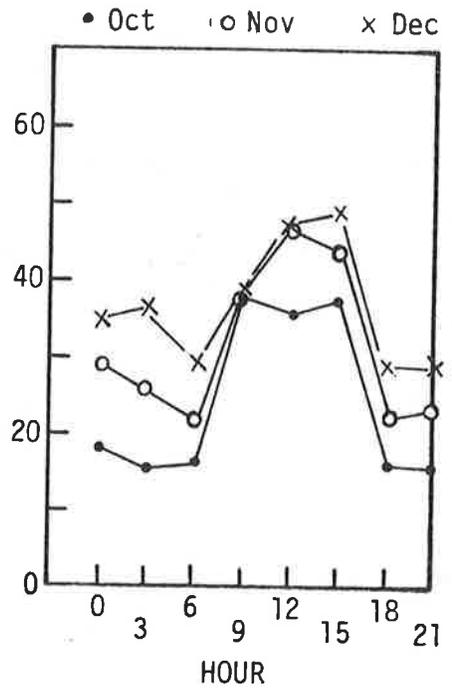
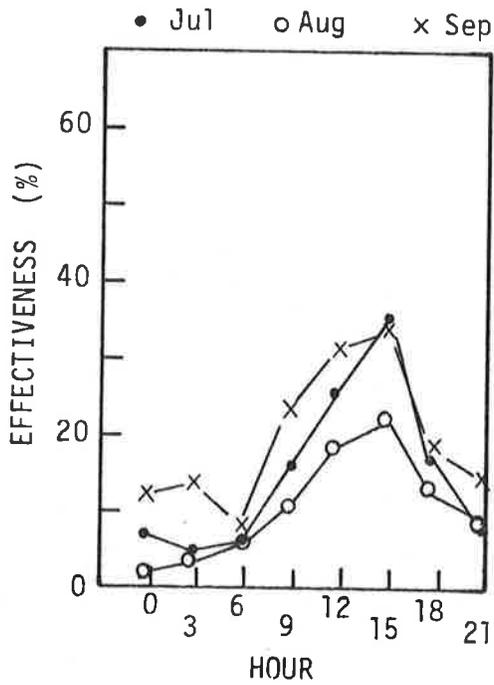
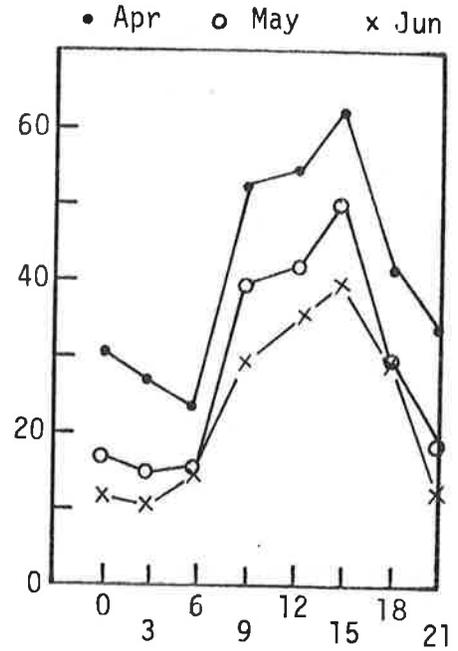
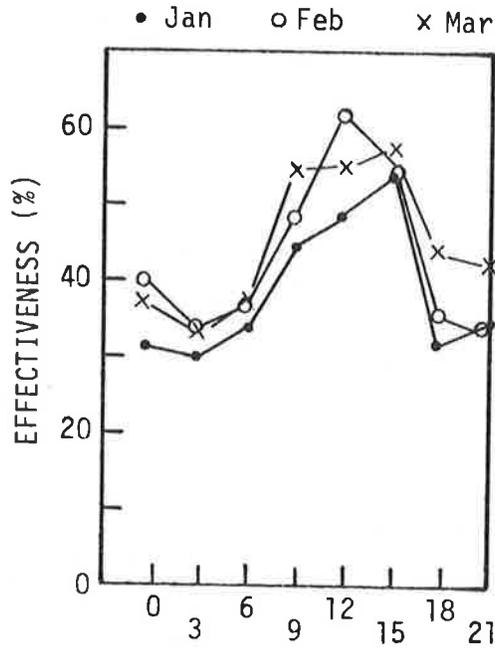


FIGURE 13. VAS EFFECTIVENESS FOR ATL RUNWAY 8/26 (CONCLUDED)

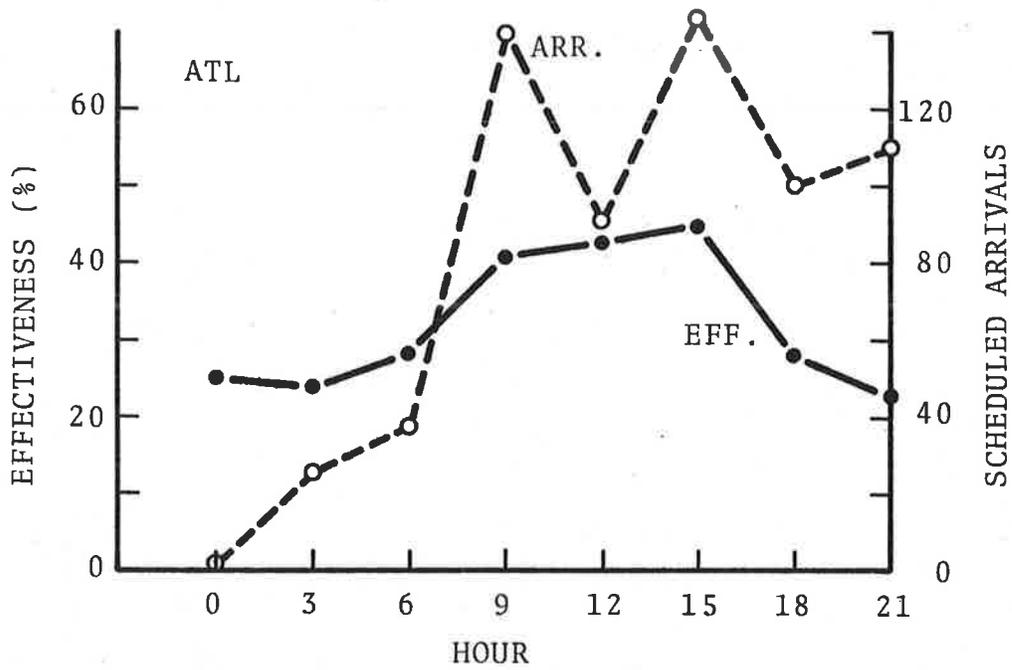


FIGURE 14. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR ATL

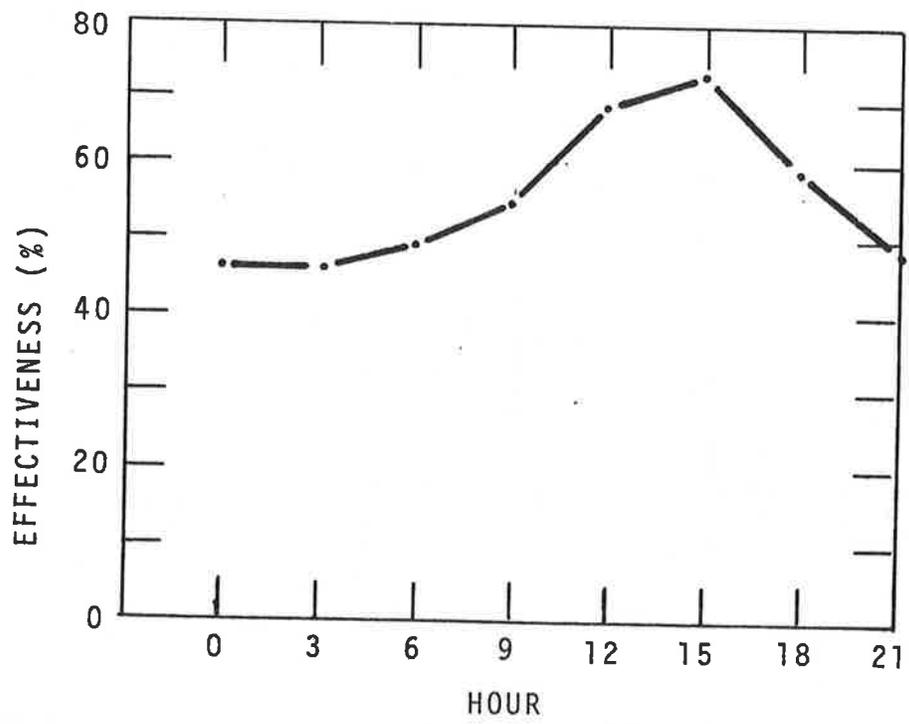
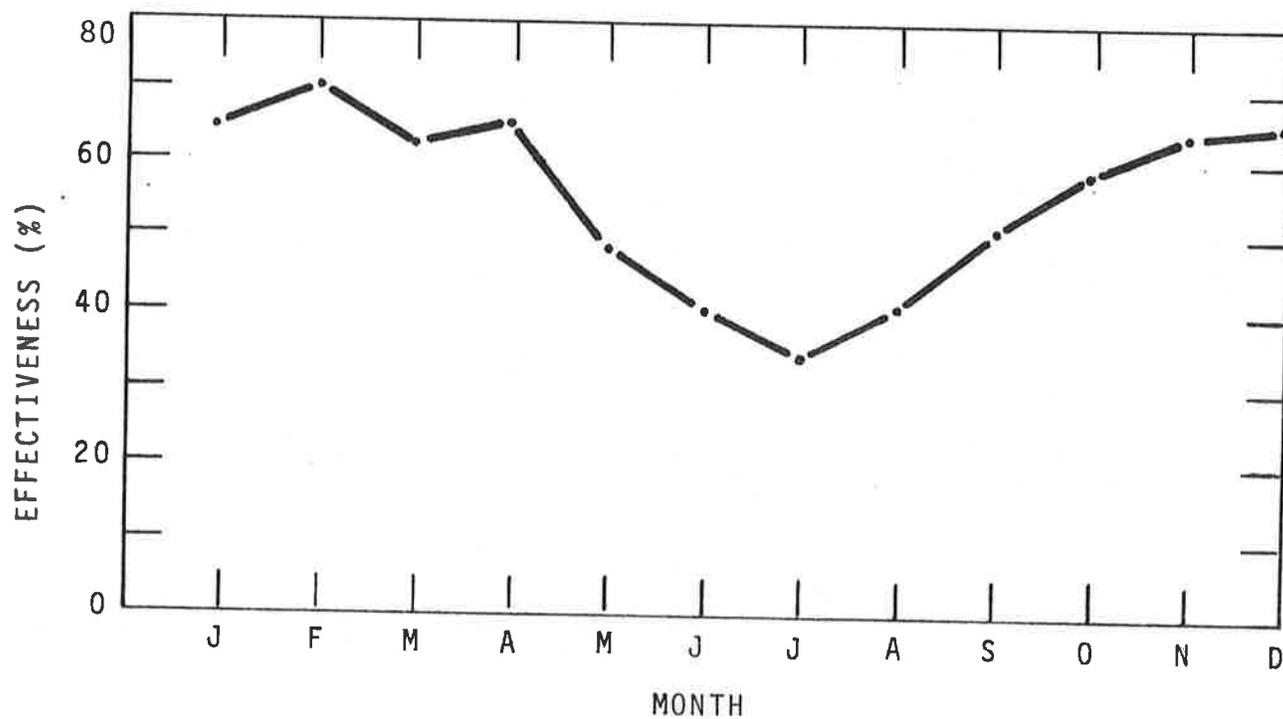


FIGURE 15. VAS EFFECTIVENESS FOR BOS RUNWAY 4/22

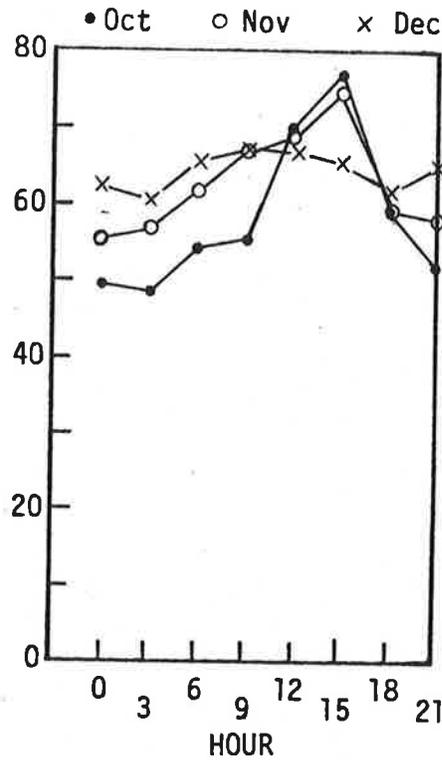
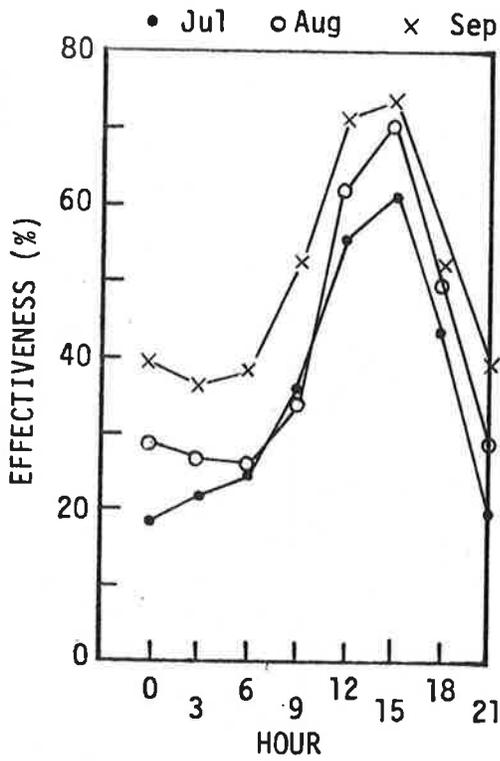
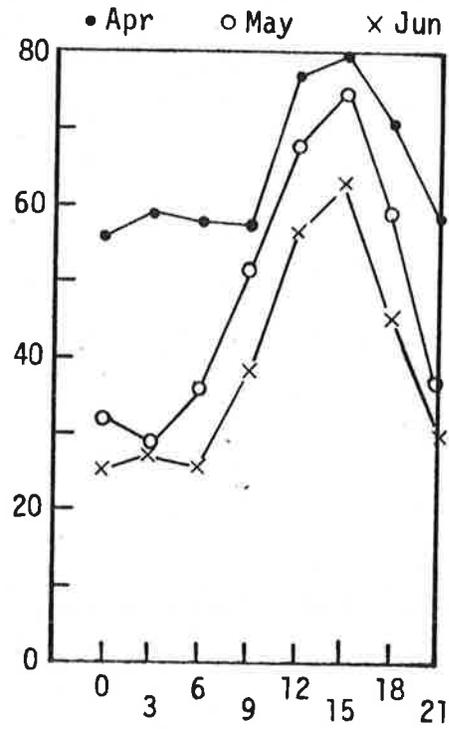
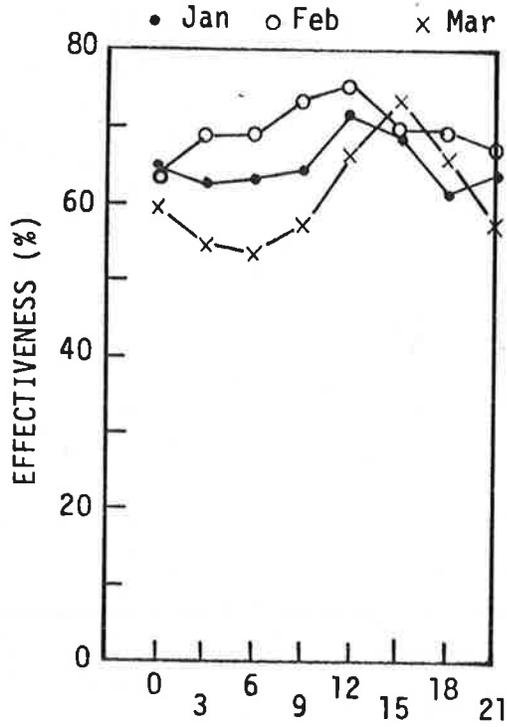


FIGURE 16. VAS EFFECTIVENESS FOR BOS RUNWAY 4/22 (CONCLUDED)

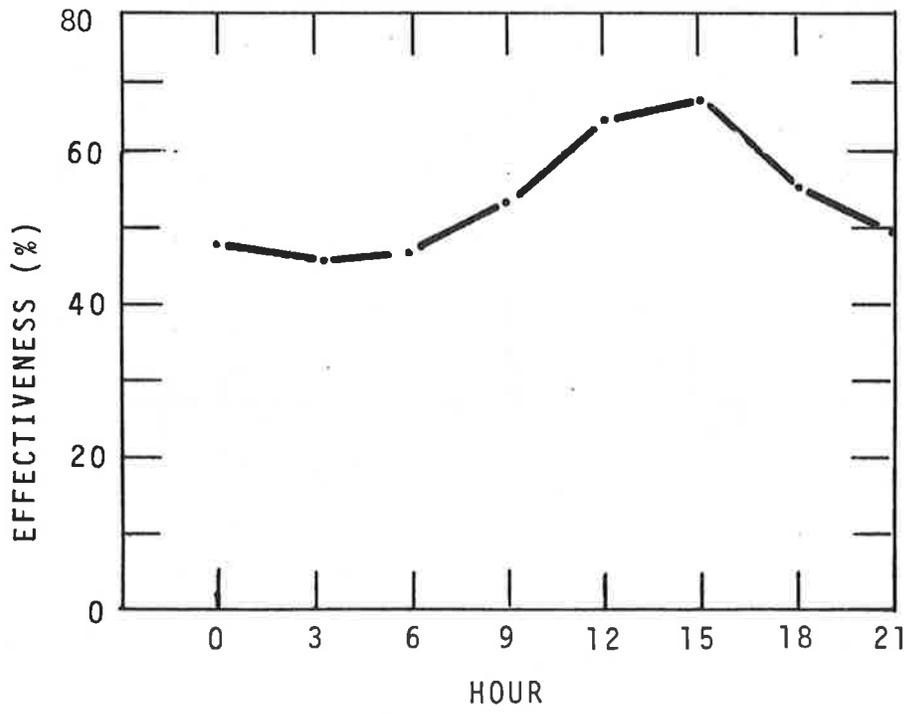
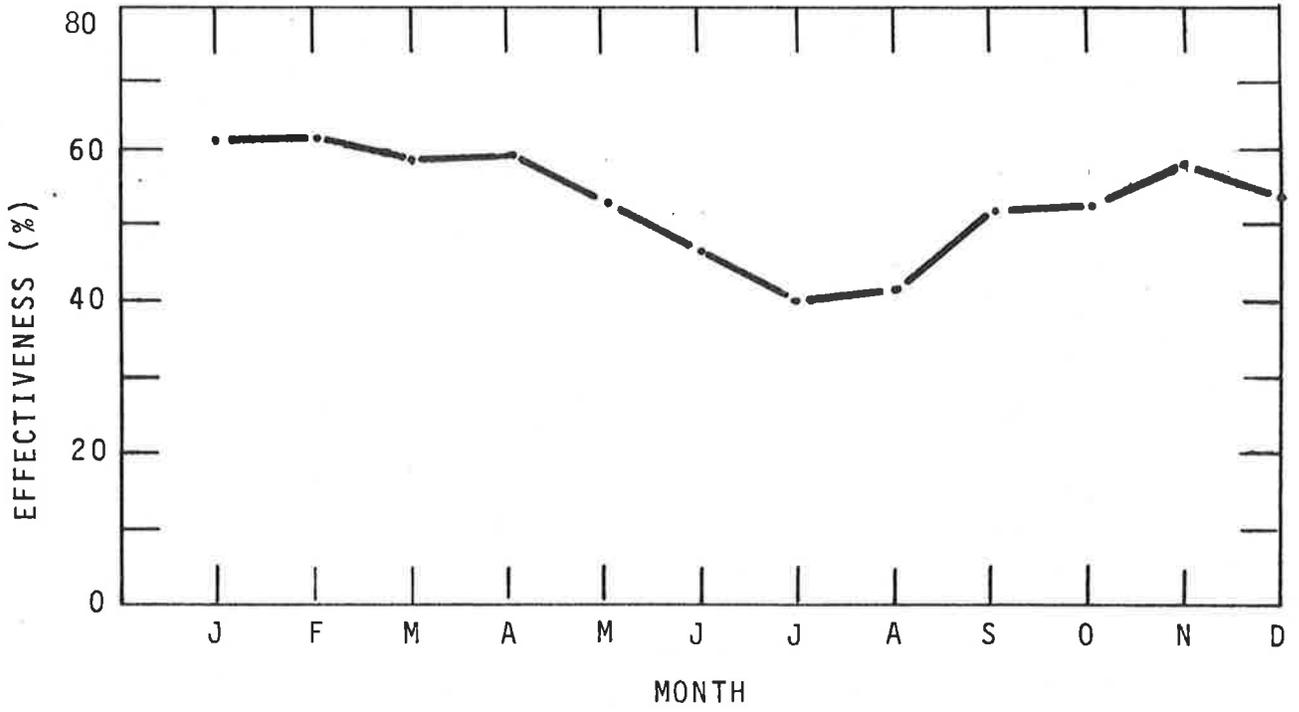


FIGURE 17. VAS EFFECTIVENESS FOR BOS RUNWAY 15/33

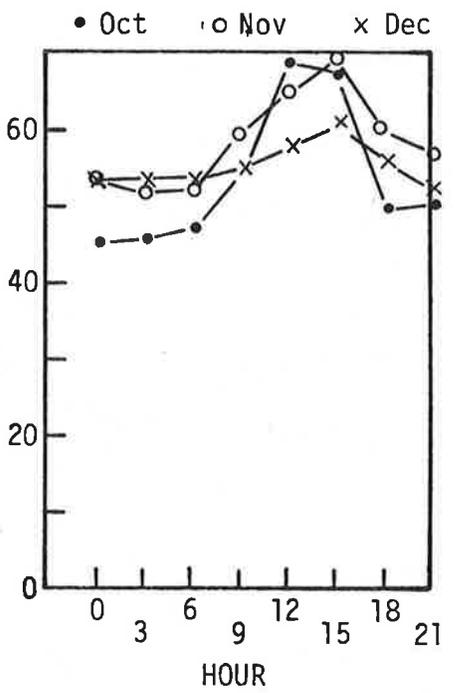
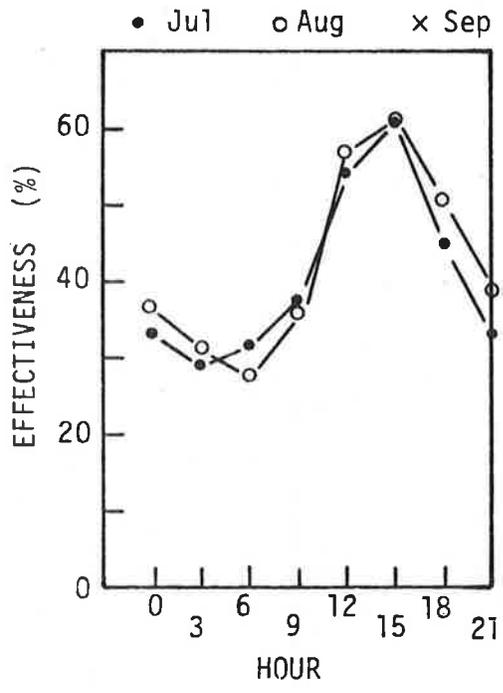
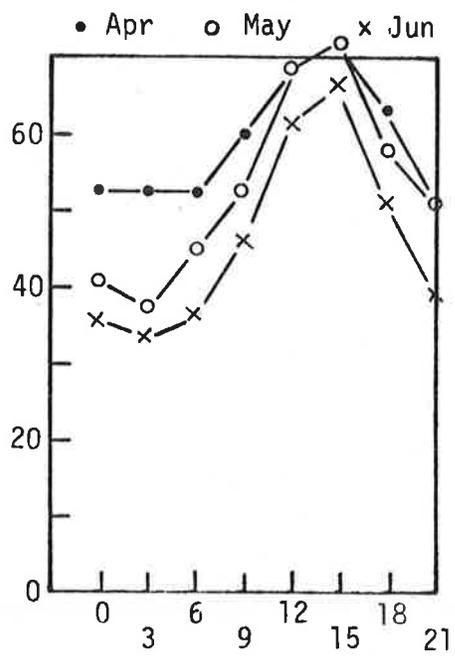
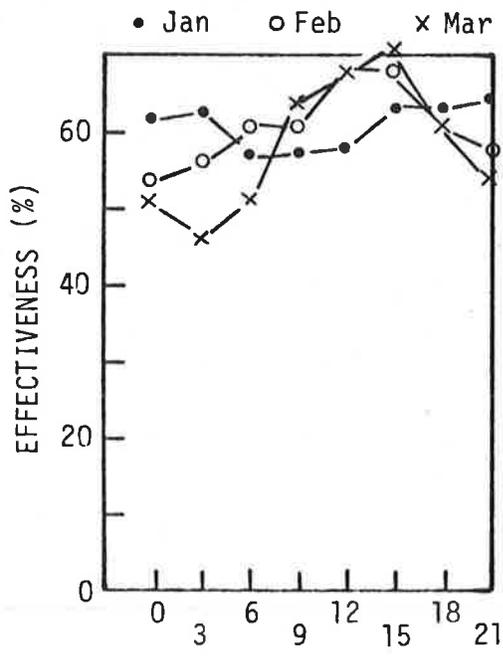


FIGURE 18. VAS EFFECTIVENESS FOR BOS RUNWAY 15/33 (CONCLUDED)

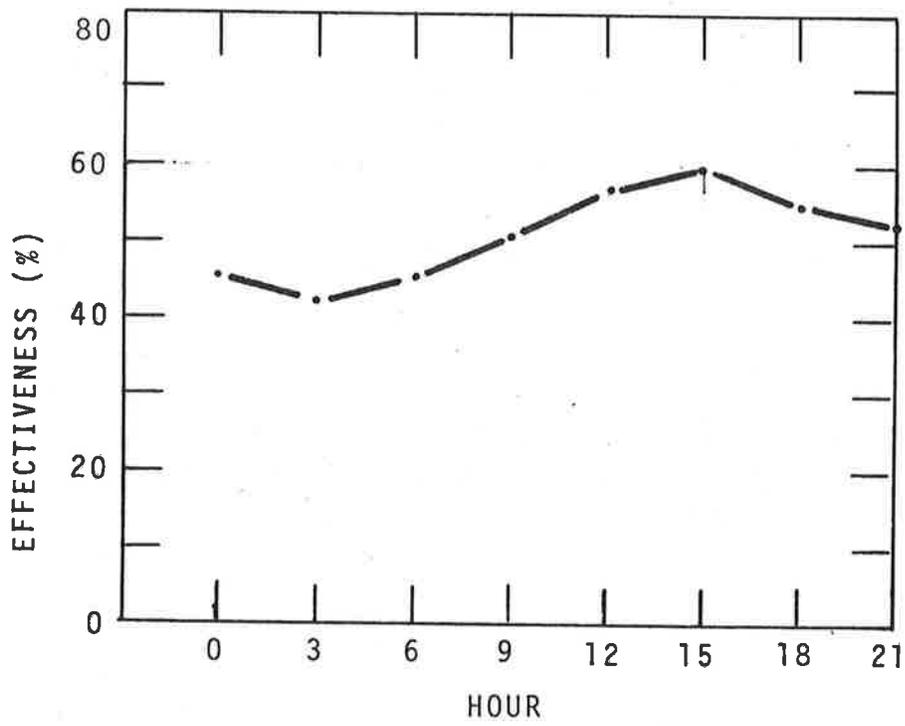
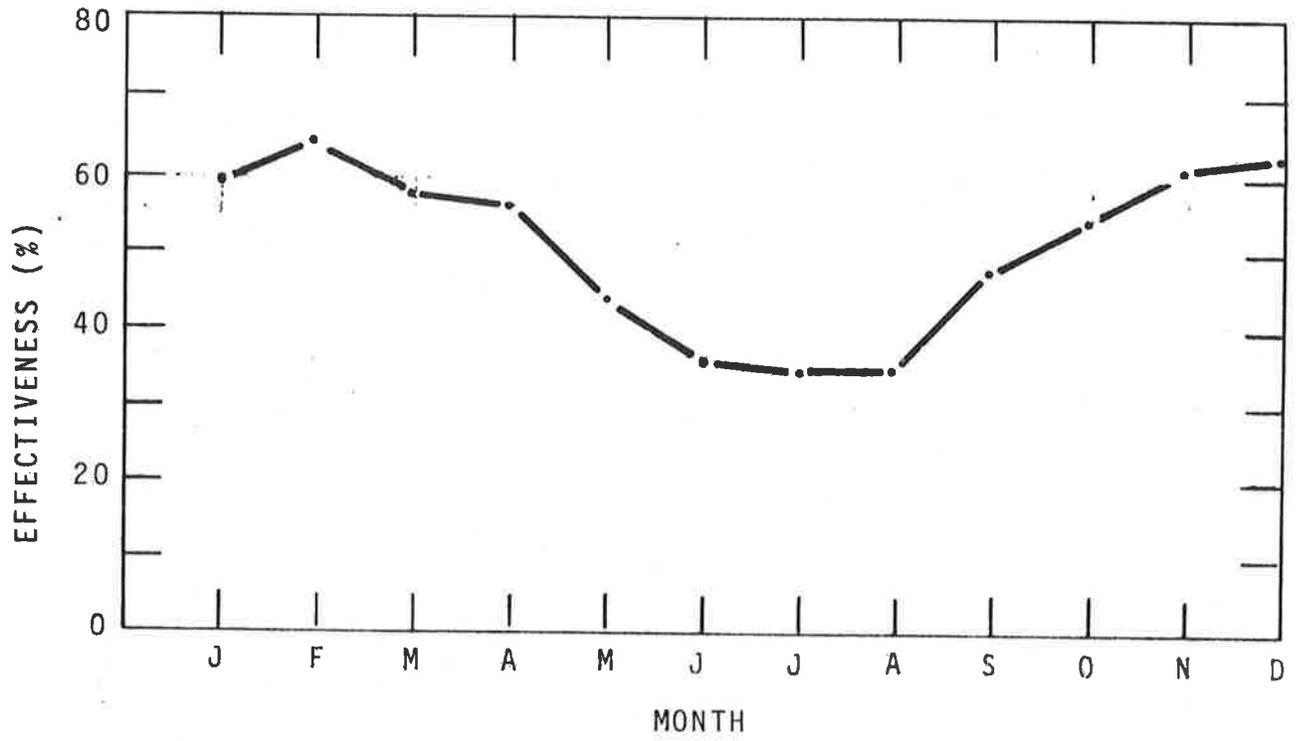


FIGURE 19. VAS EFFECTIVENESS FOR BOS RUNWAY 9/27

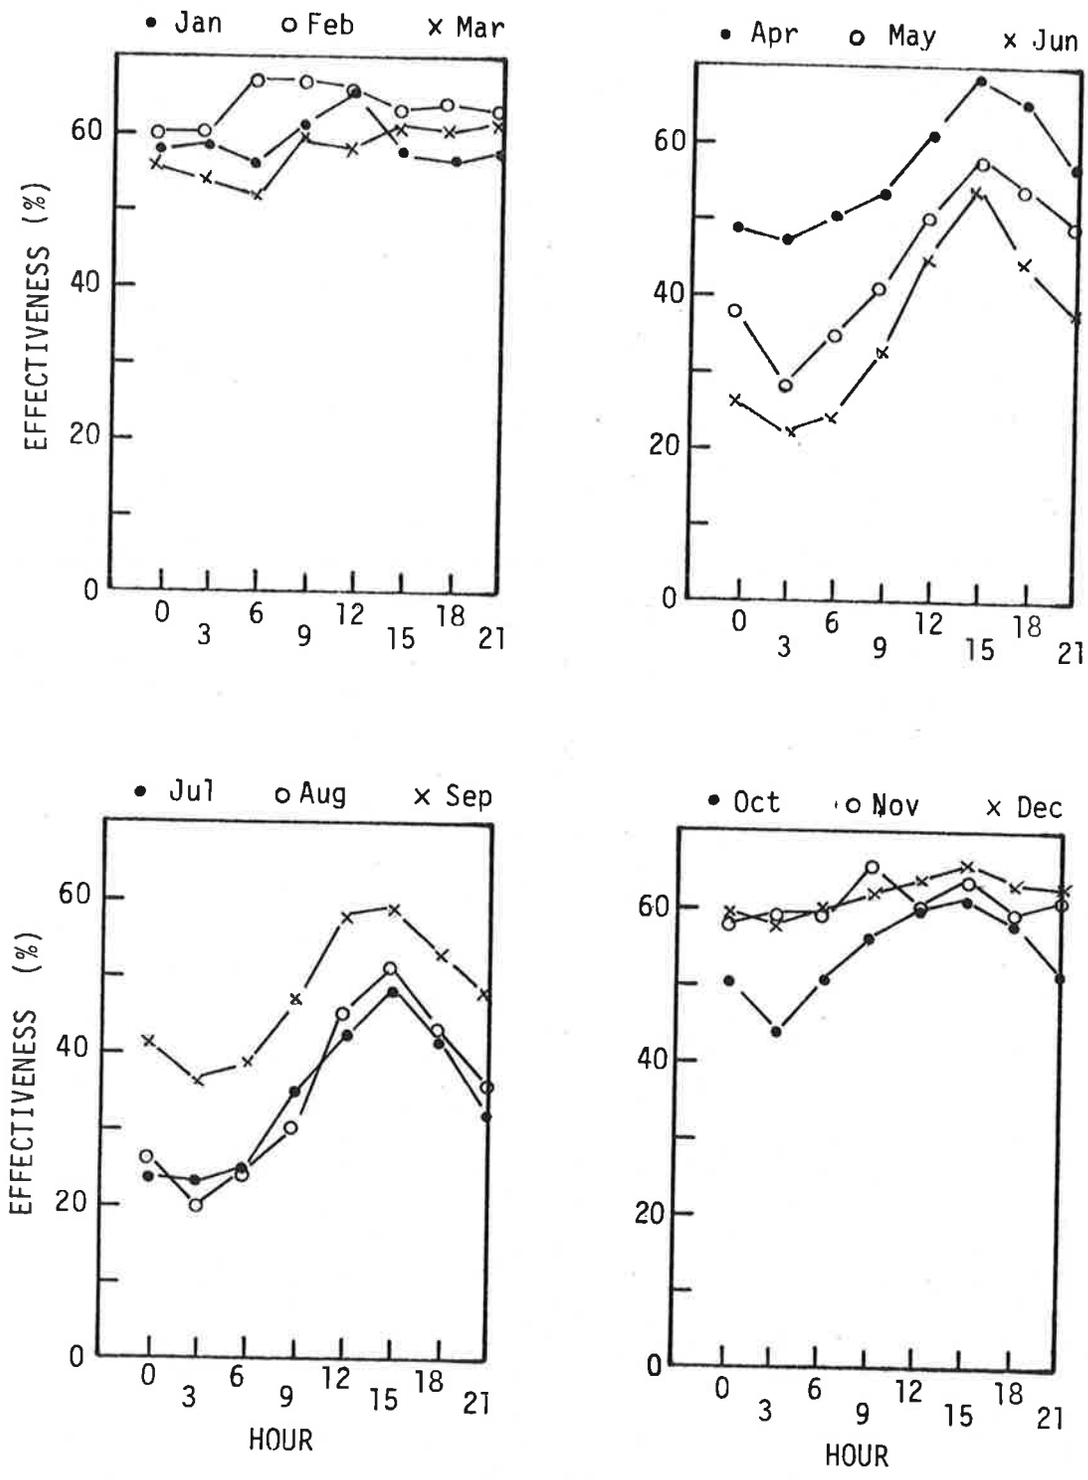


FIGURE 20. VAS EFFECTIVENESS FOR BOS RUNWAY 9/27 (CONCLUDED)

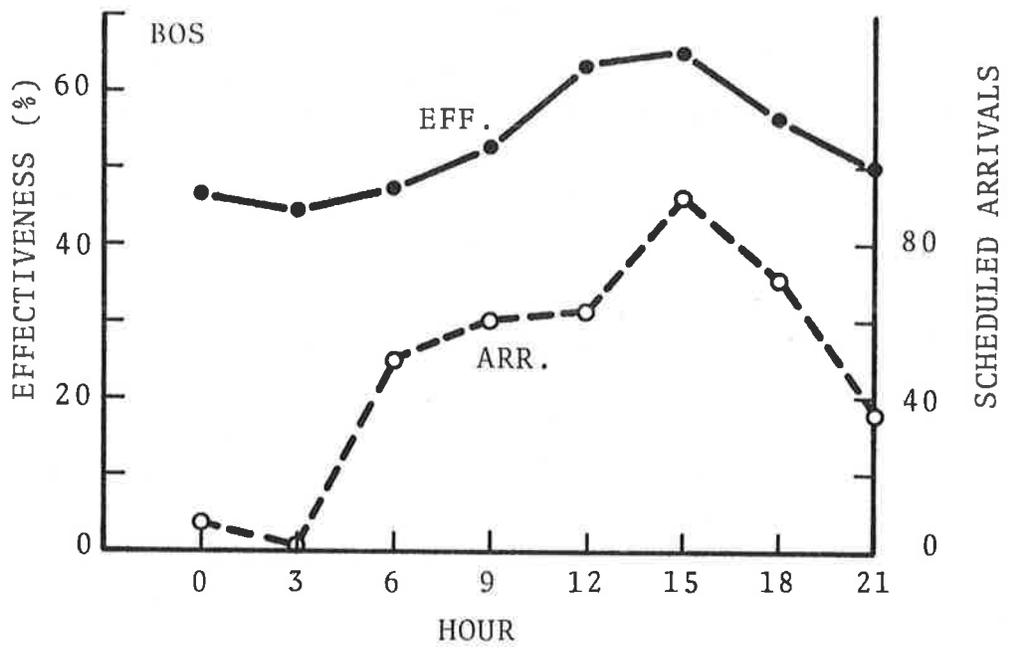


FIGURE 21. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR BOS

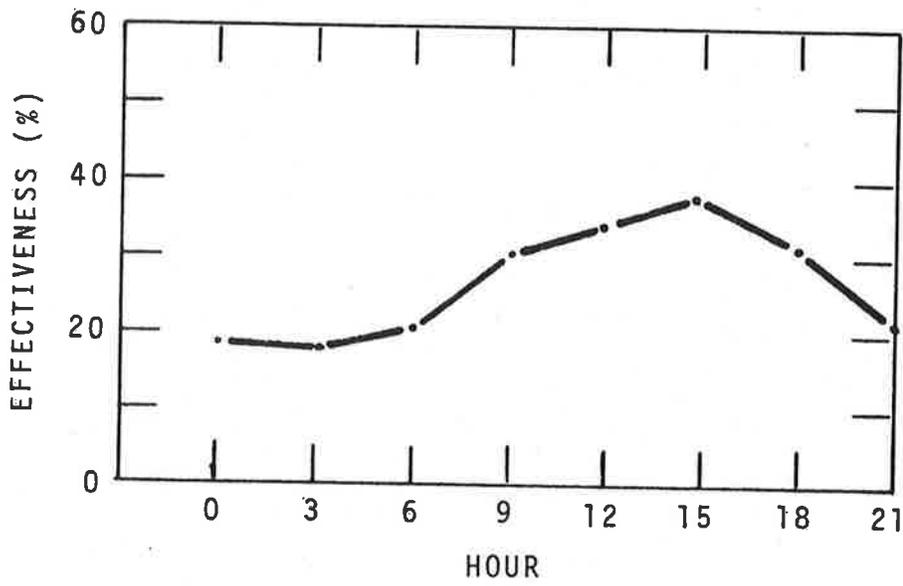
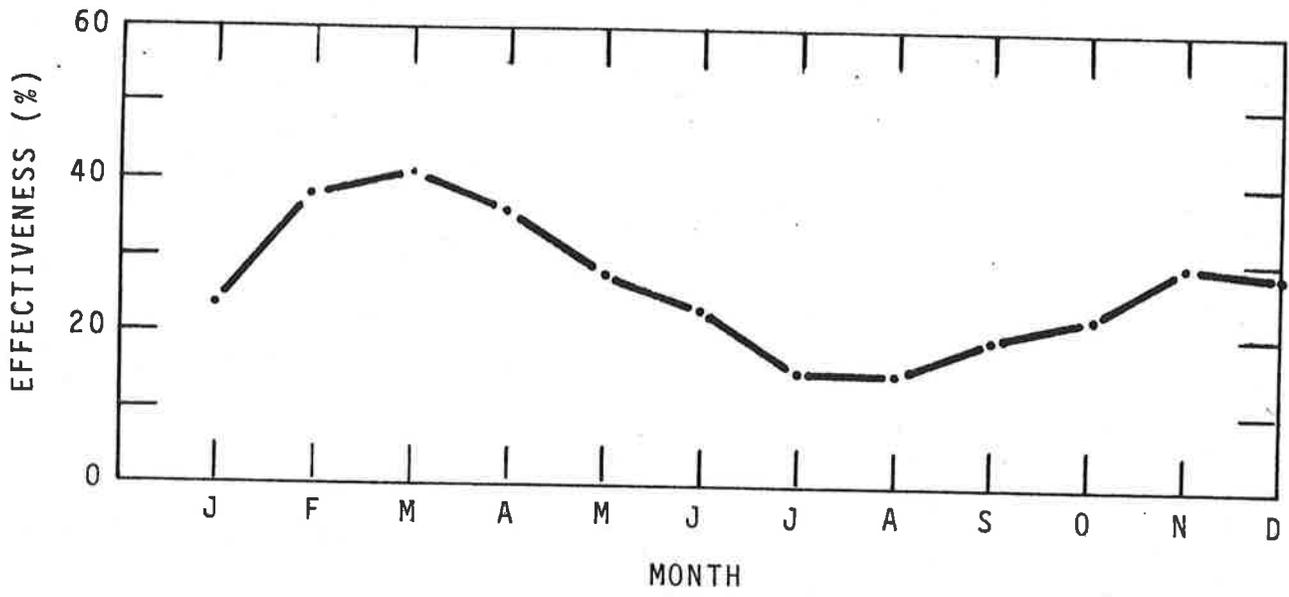


FIGURE 22. VAS EFFECTIVENESS FOR DCA RUNWAY 18/36

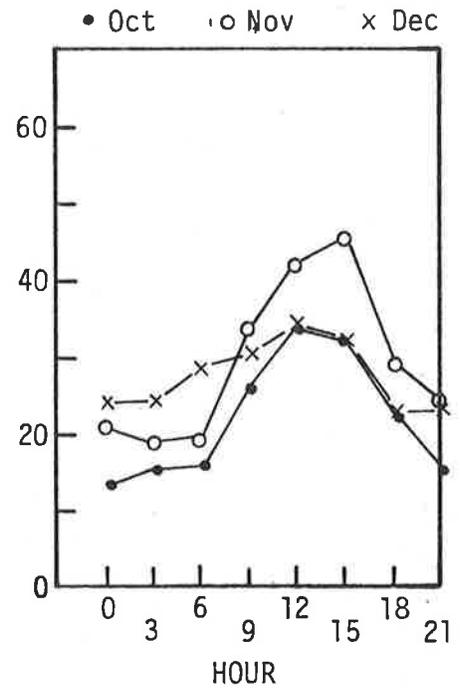
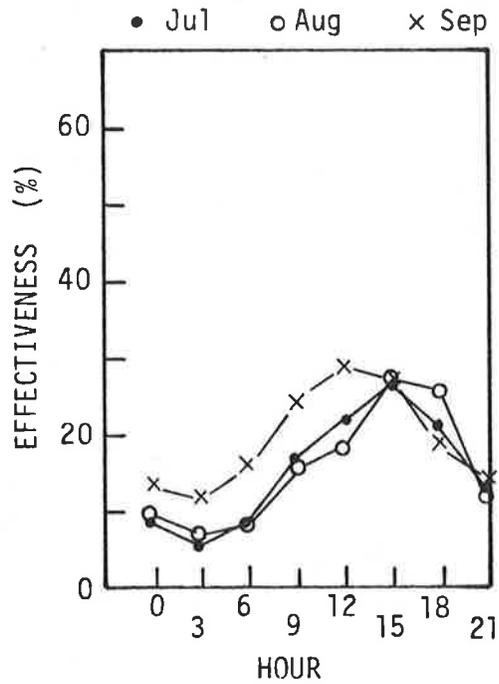
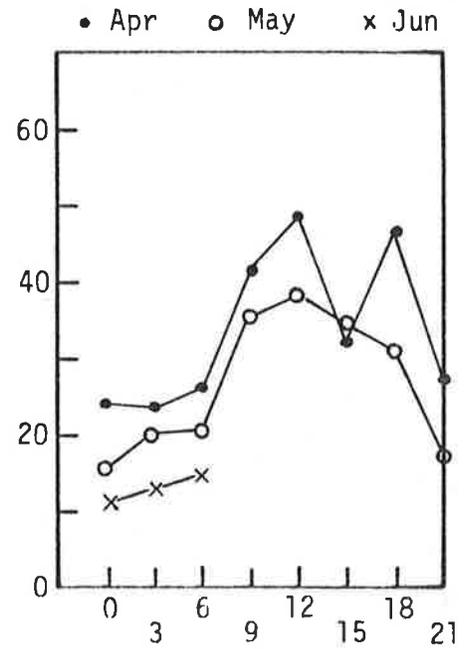
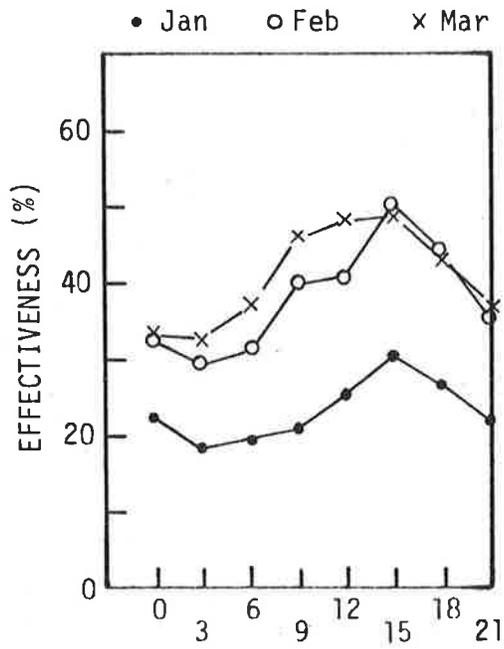


FIGURE 23. VAS EFFECTIVENESS FOR DCA RUNWAY 18/36 (CONCLUDED)

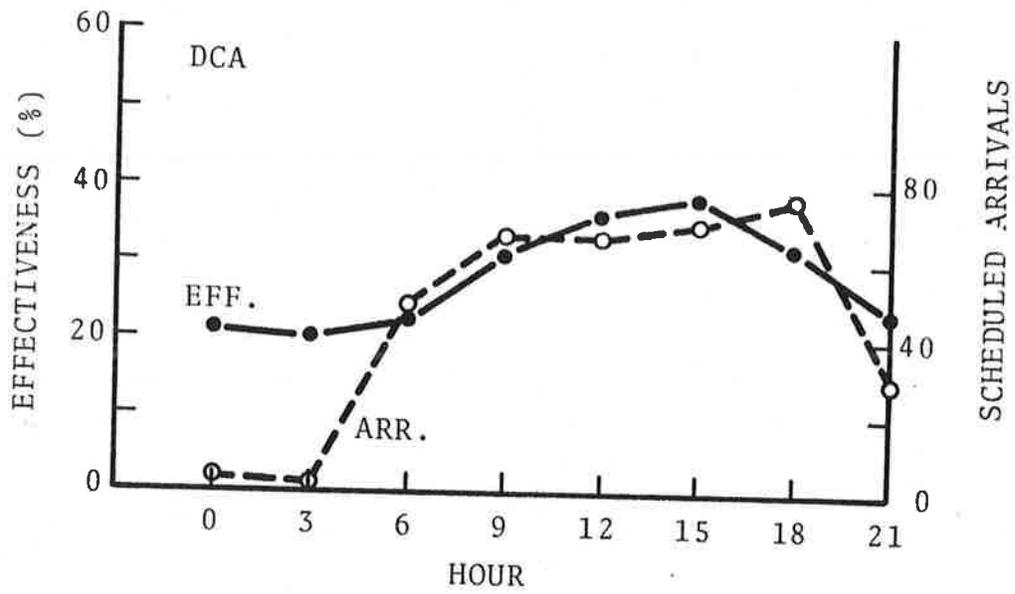


FIGURE 24. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR DCA

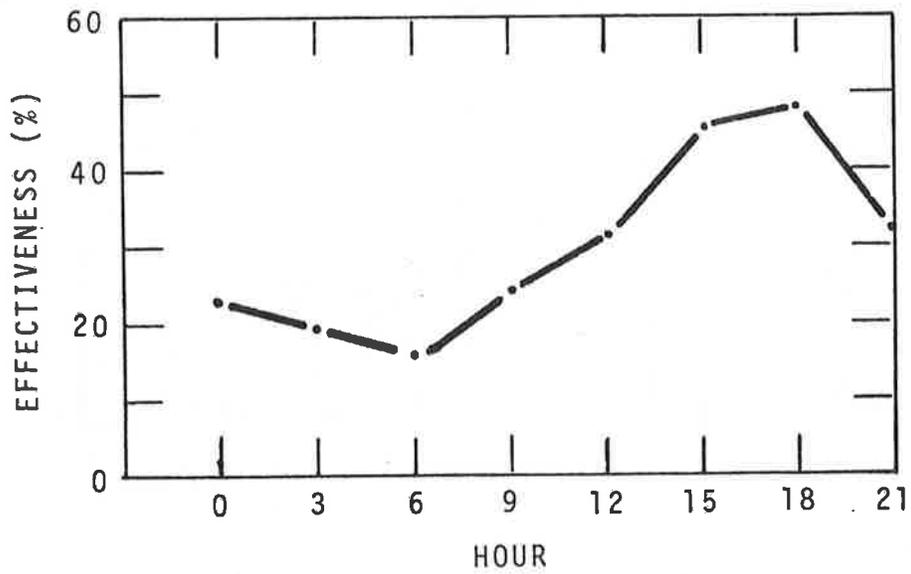
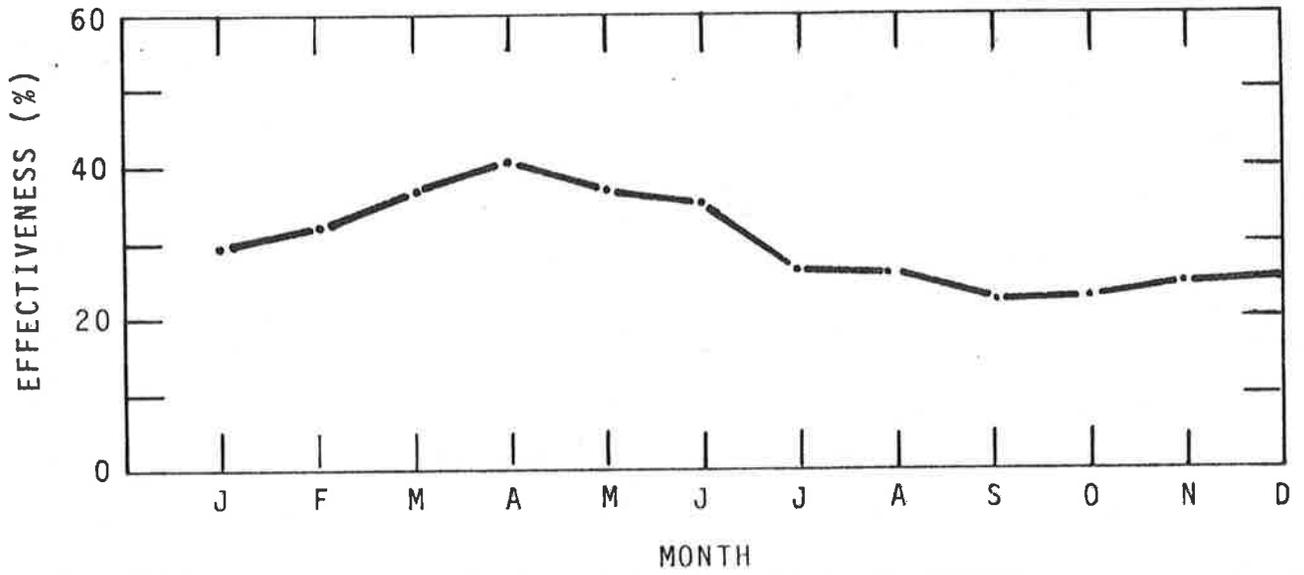


FIGURE 25. VAS EFFECTIVENESS FOR DEN RUNWAY 17/35

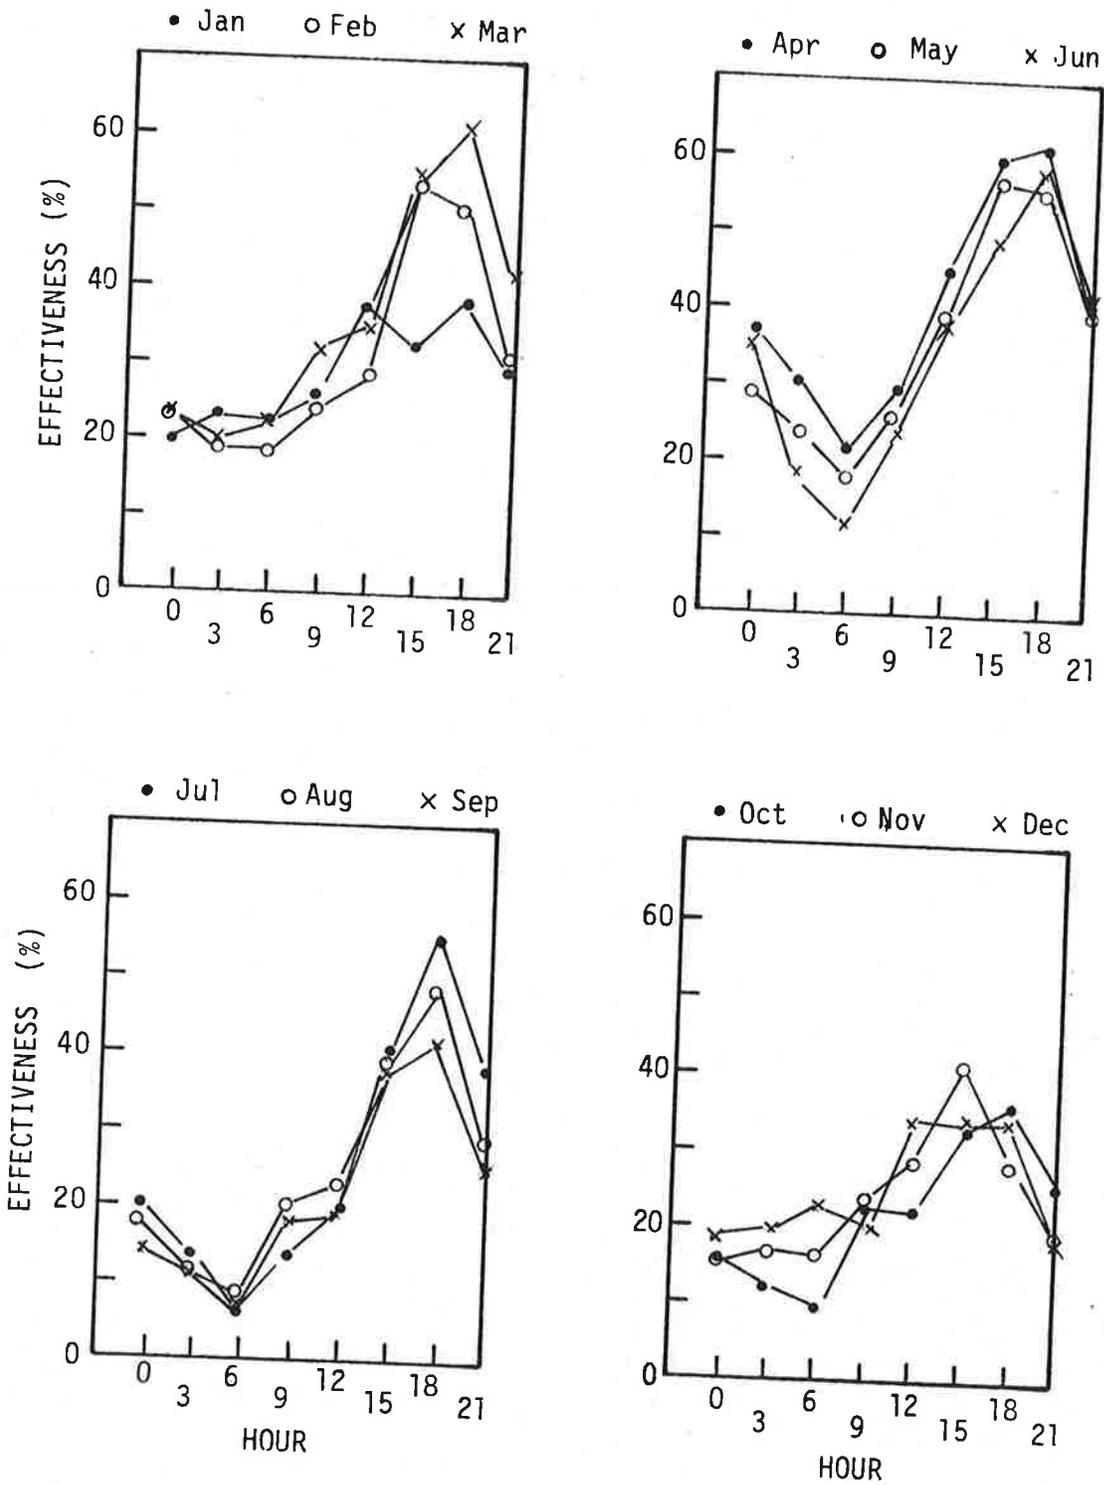


FIGURE 26. VAS EFFECTIVENESS FOR DEN RUNWAY 17/35 (CONCLUDED)

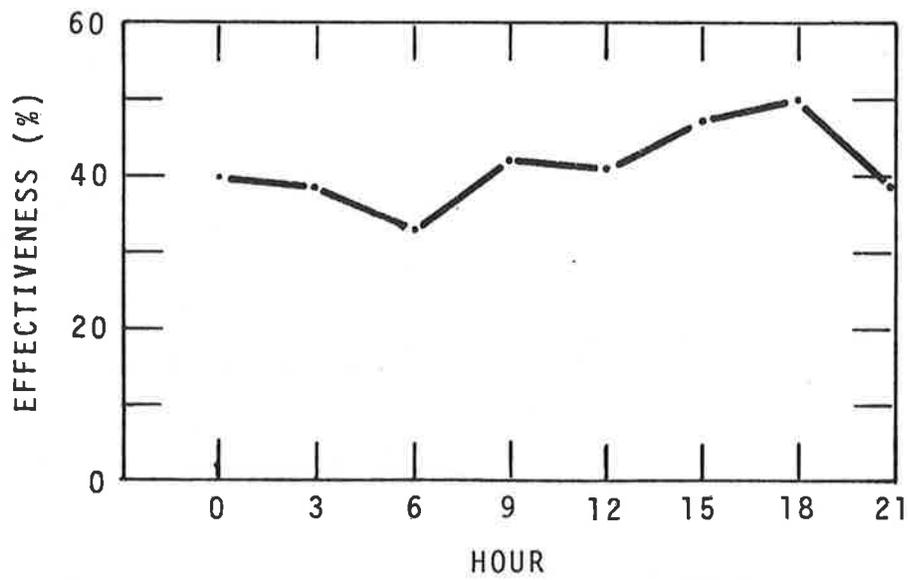
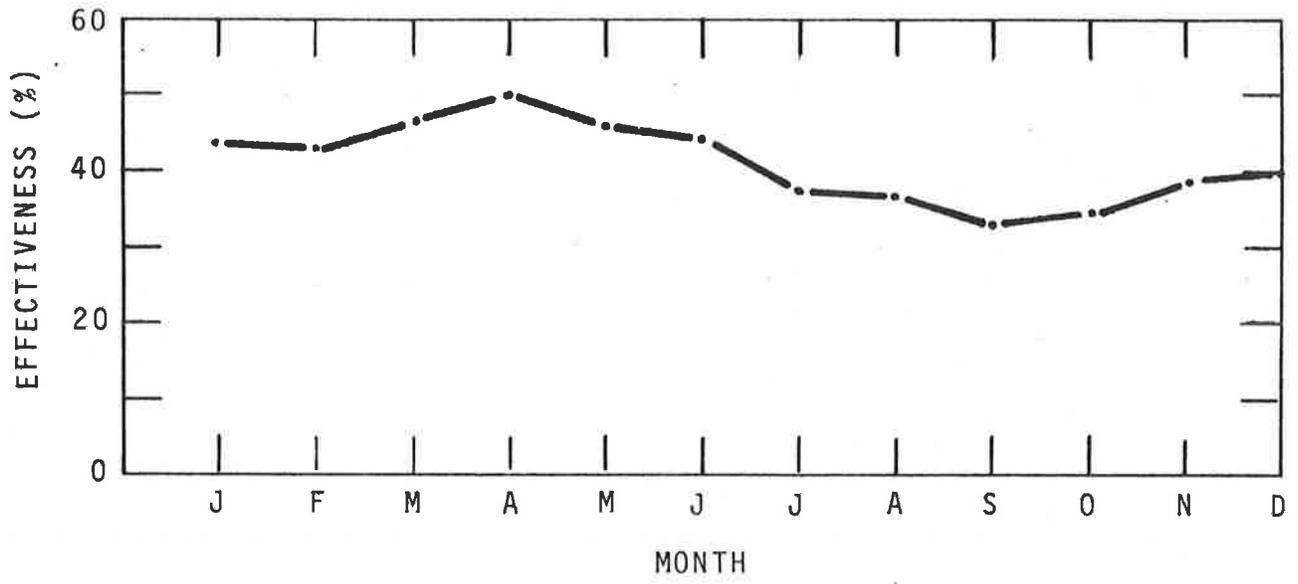


FIGURE 27. VAS EFFECTIVENESS FOR DEN RUNWAY 8/26

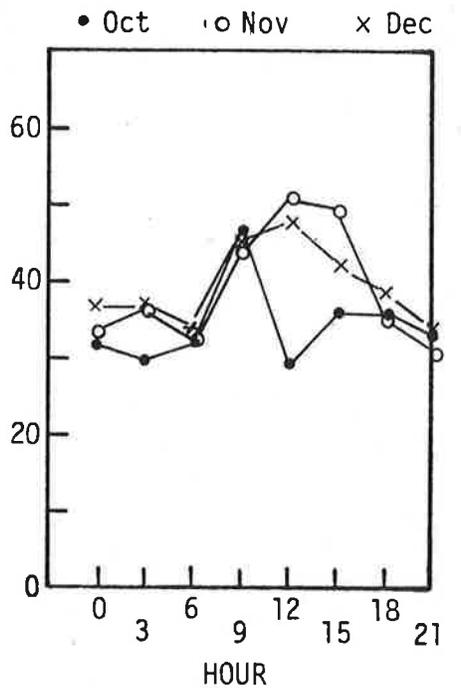
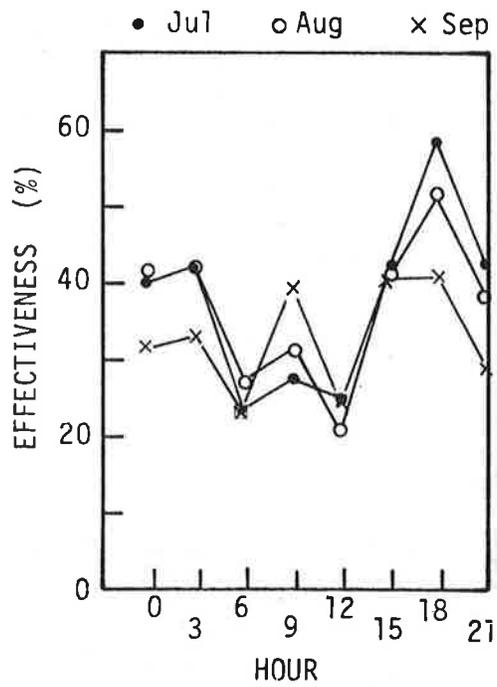
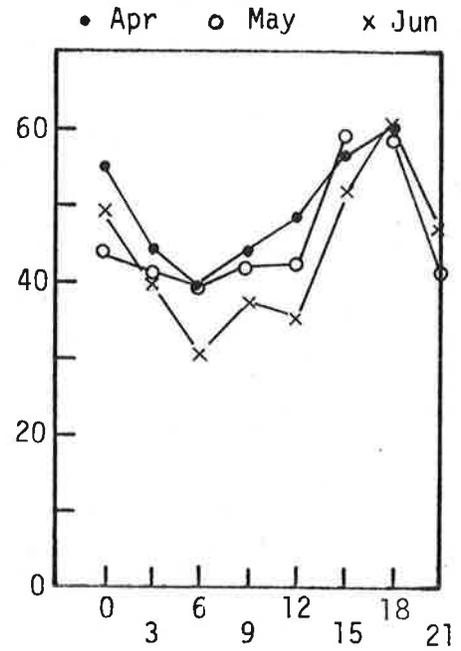
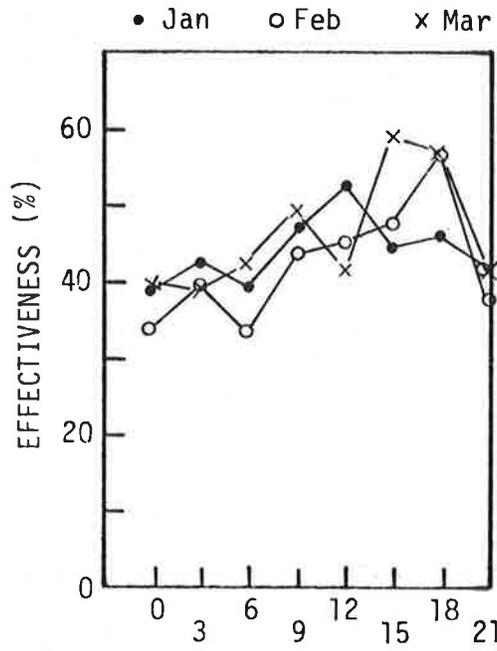


FIGURE 28. VAS EFFECTIVENESS FOR DEN RUNWAY 8/26 (CONCLUDED)

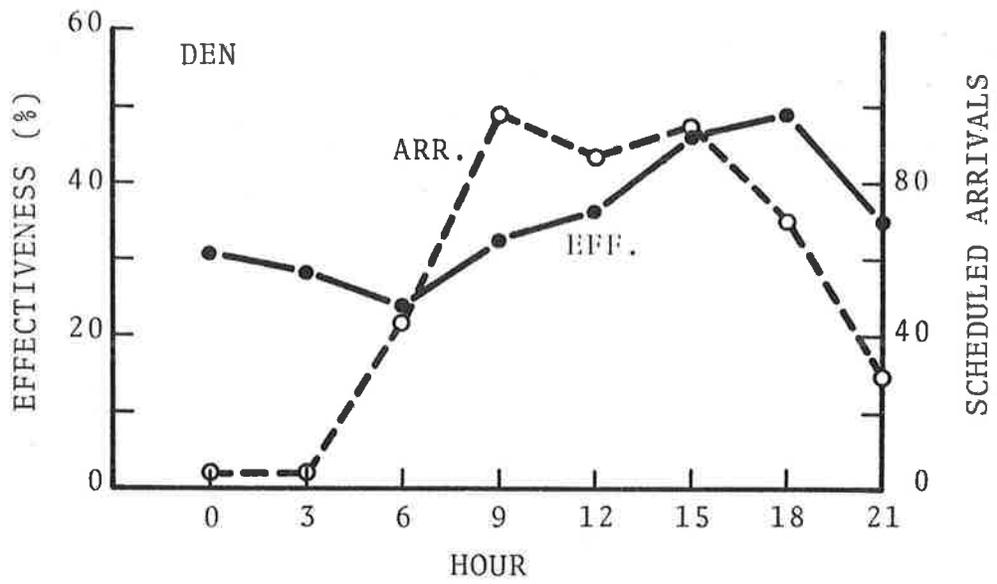


FIGURE 29. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR DEN

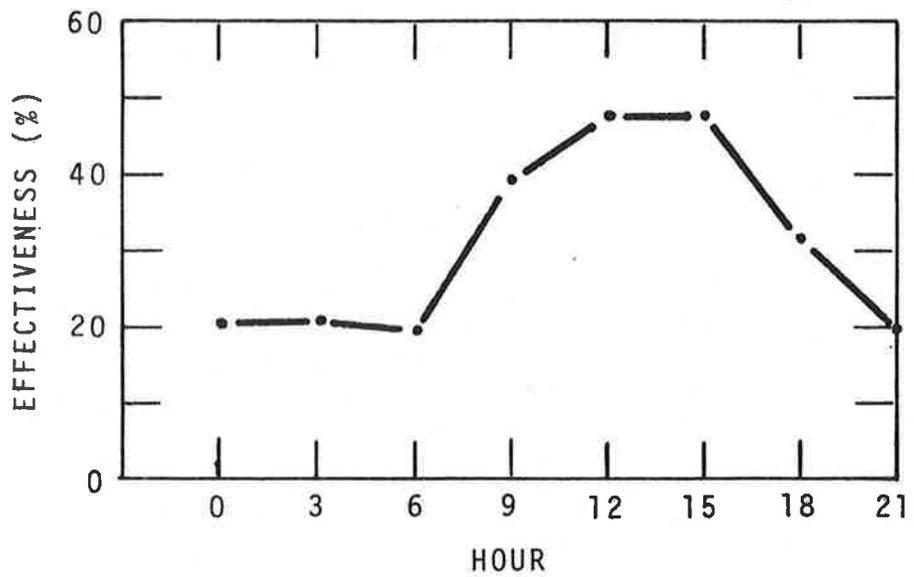
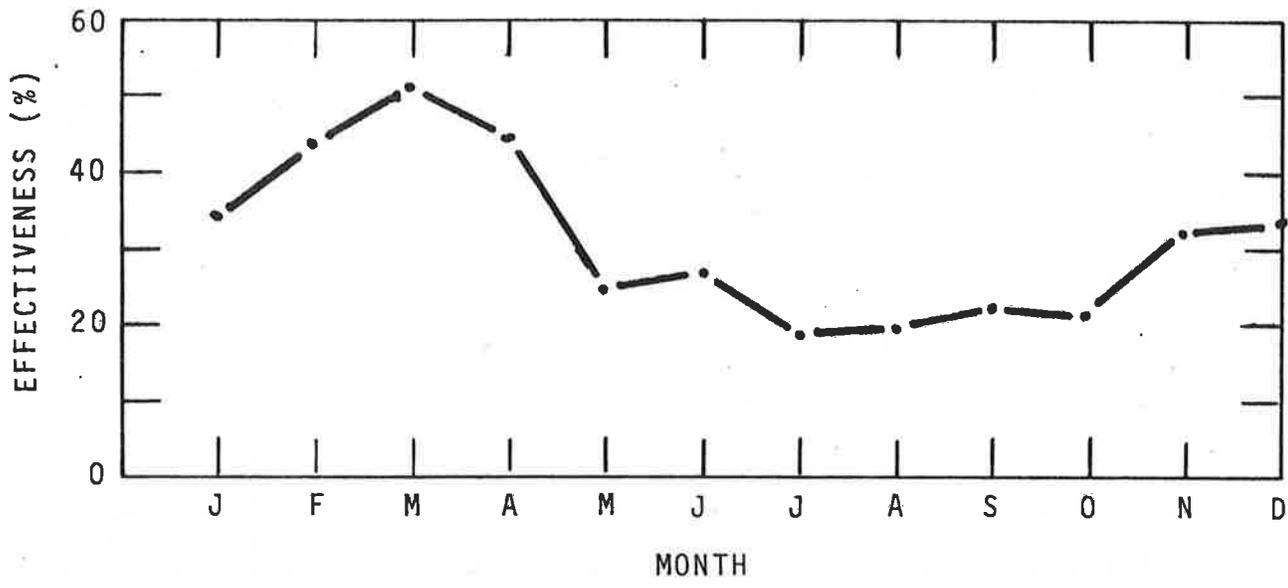


FIGURE 30. VAS EFFECTIVENESS FOR DFW RUNWAY 17/35

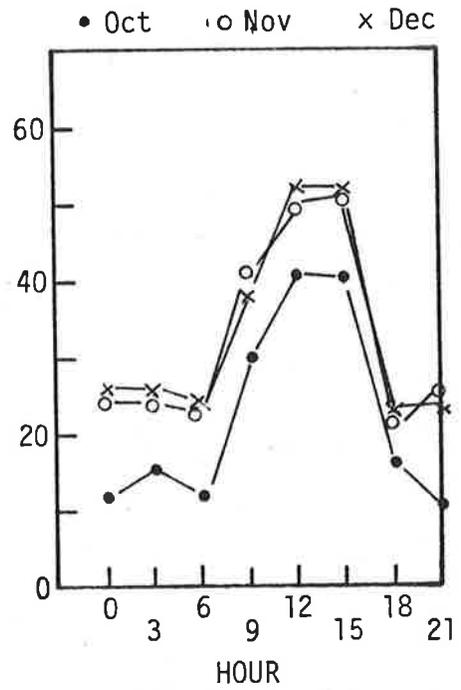
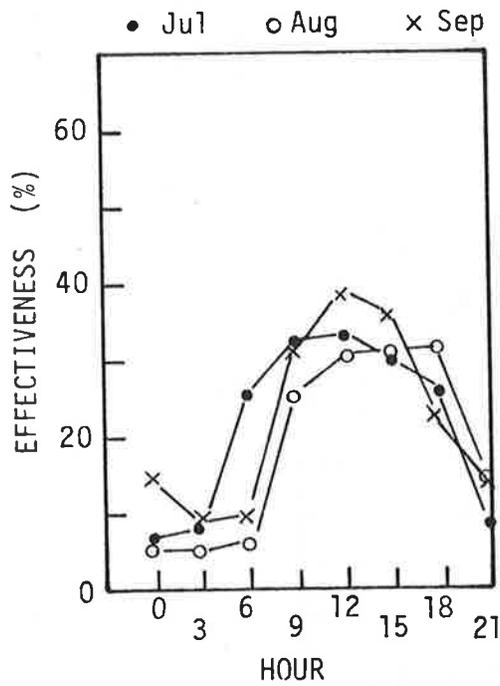
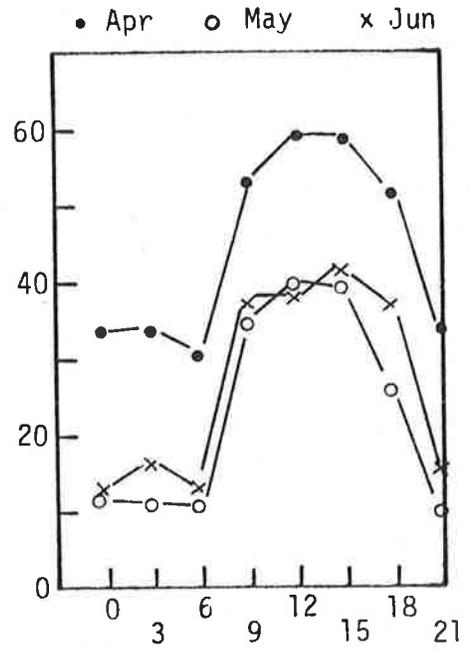
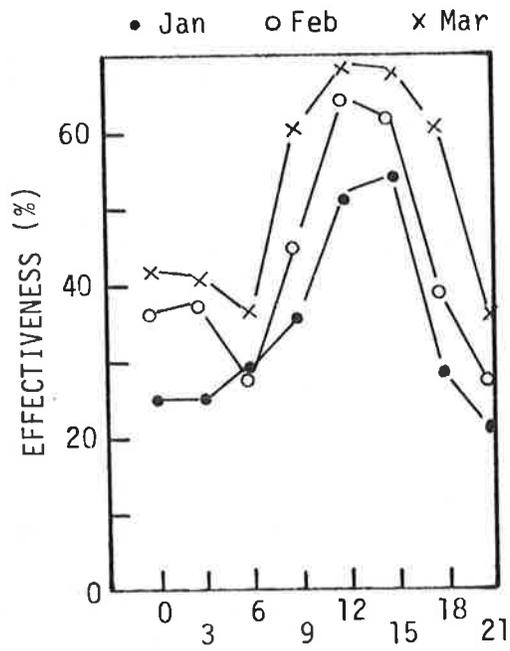


FIGURE 31. VAS EFFECTIVENESS FOR DFW RUNWAY 17/35 (CONCLUDED)

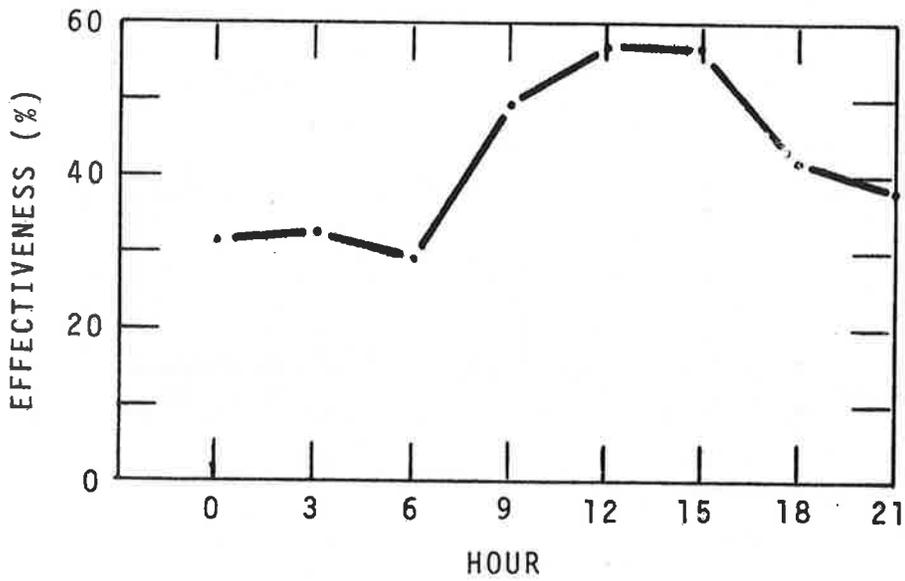
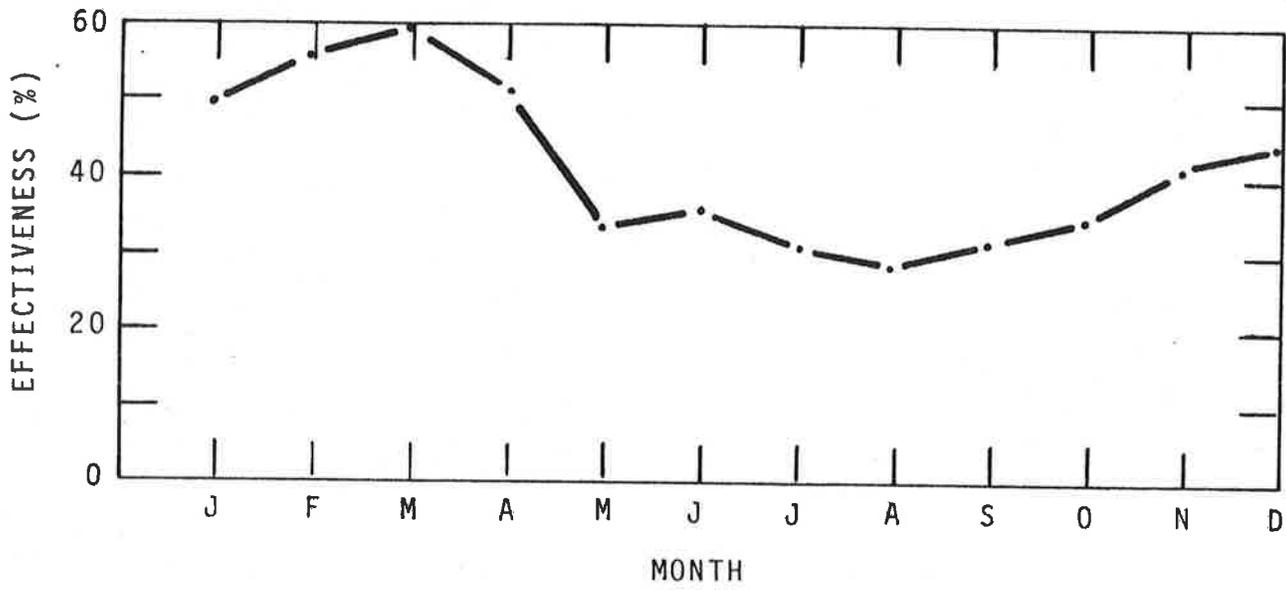


FIGURE 32. VAS EFFECTIVENESS FOR DFW RUNWAY 13/31

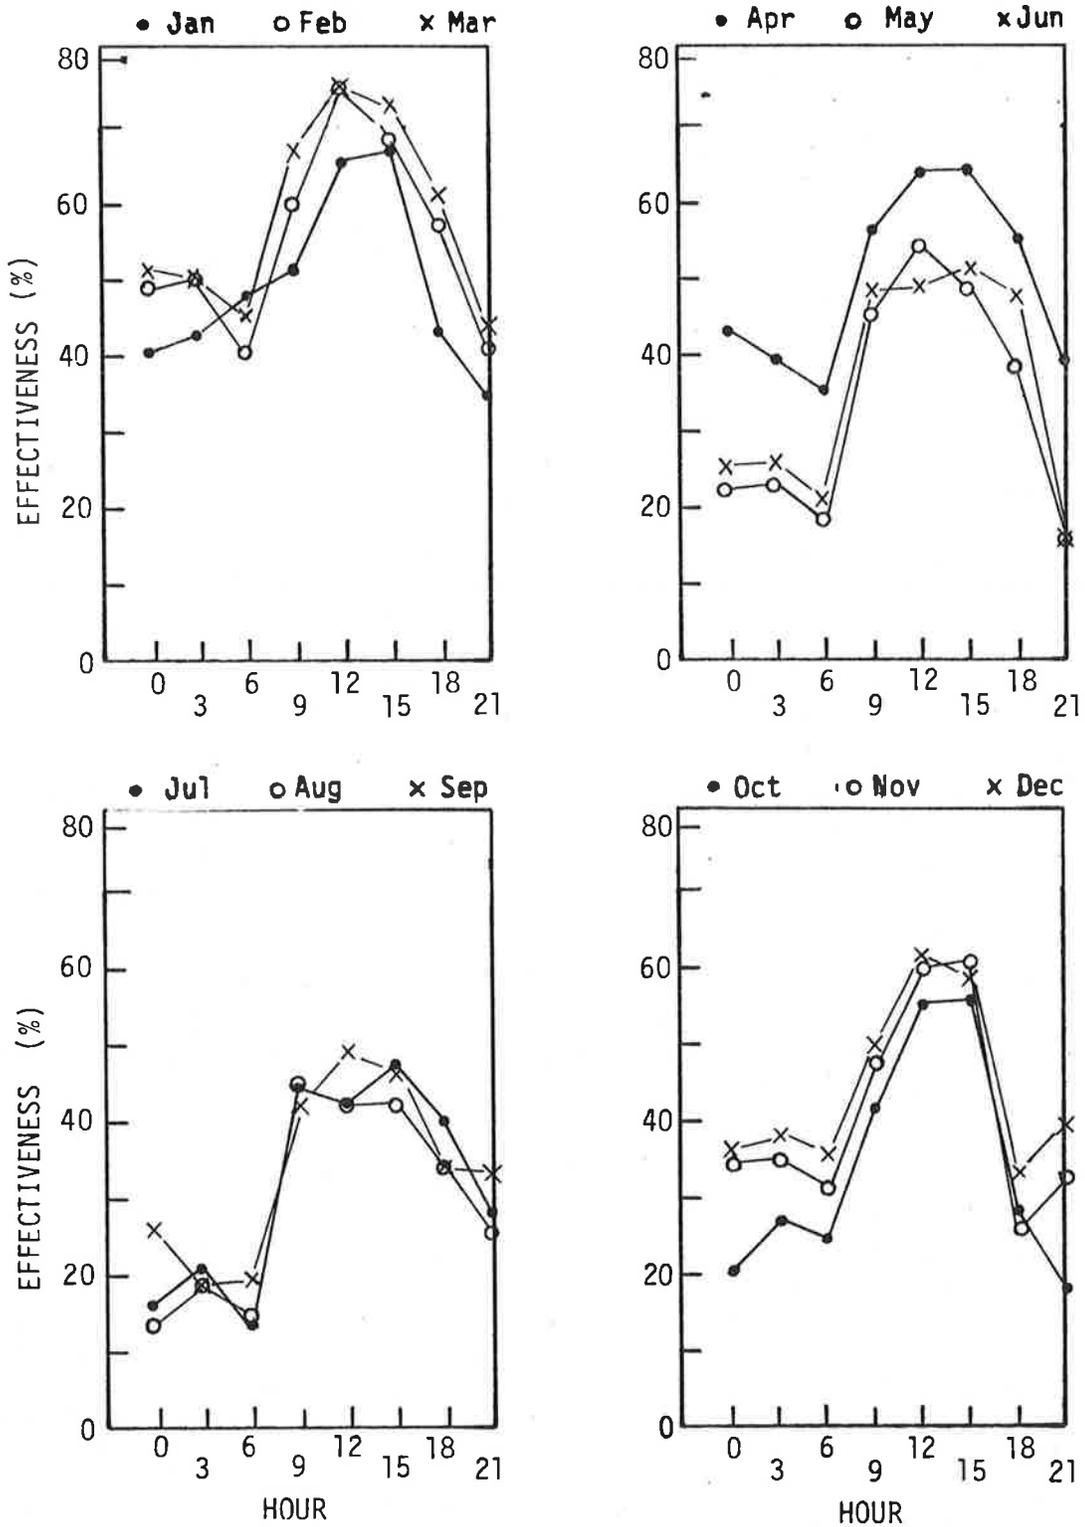


FIGURE 33. VAS EFFECTIVENESS FOR DFW RUNWAY 13/31 (CONCLUDED)

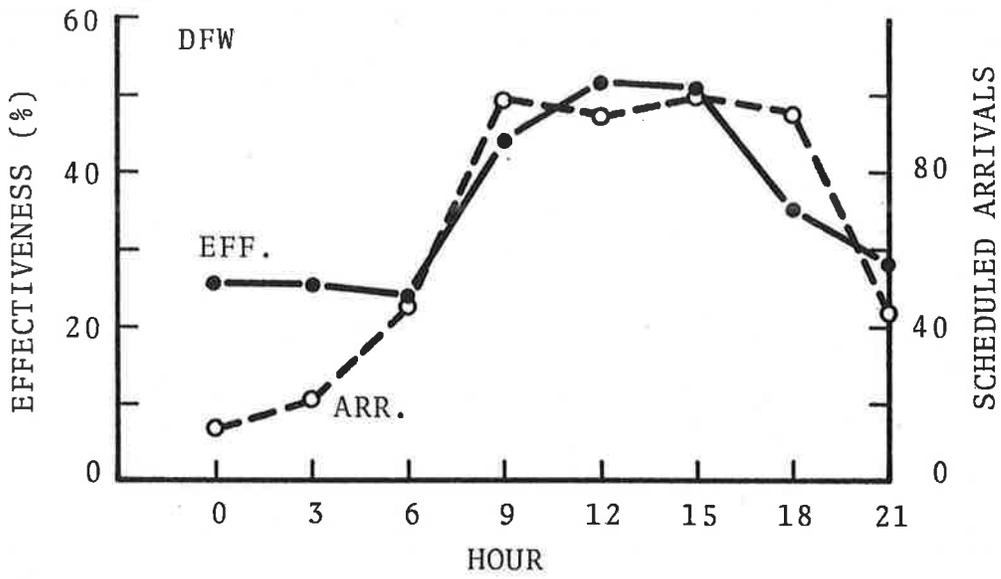


FIGURE 34. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR DFW

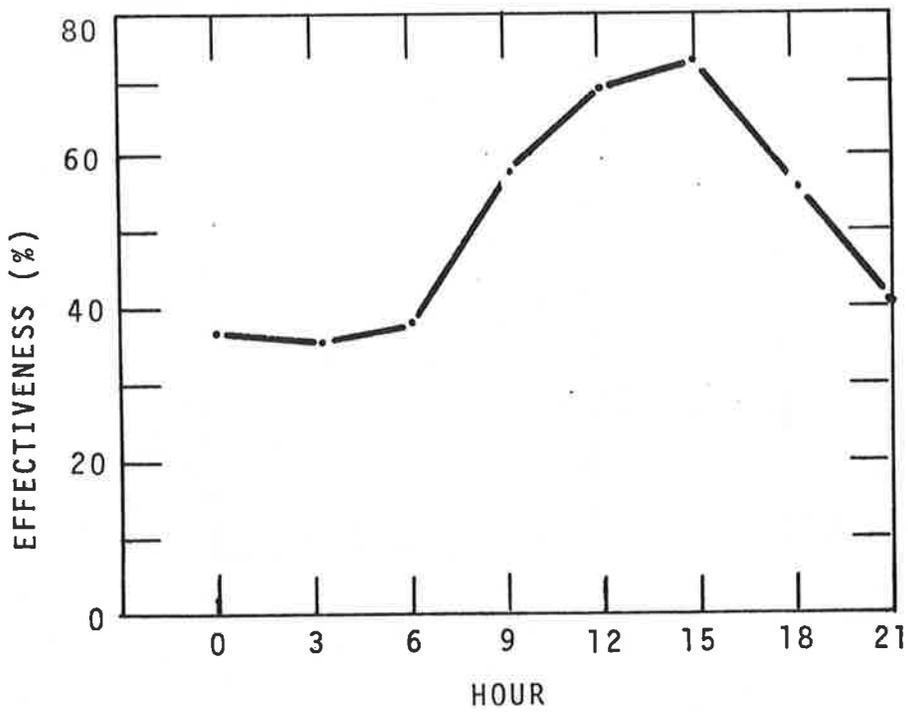
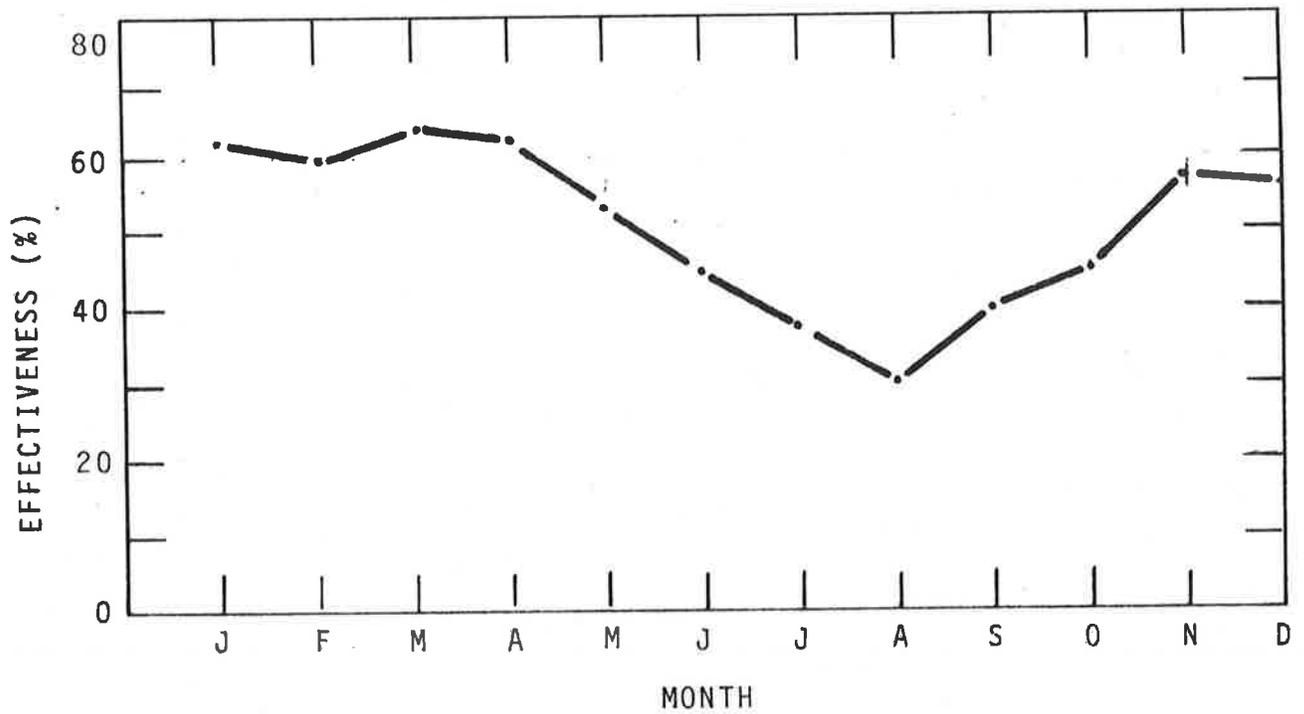


FIGURE 35. VAS EFFECTIVENESS FOR DTW RUNWAY 3/21

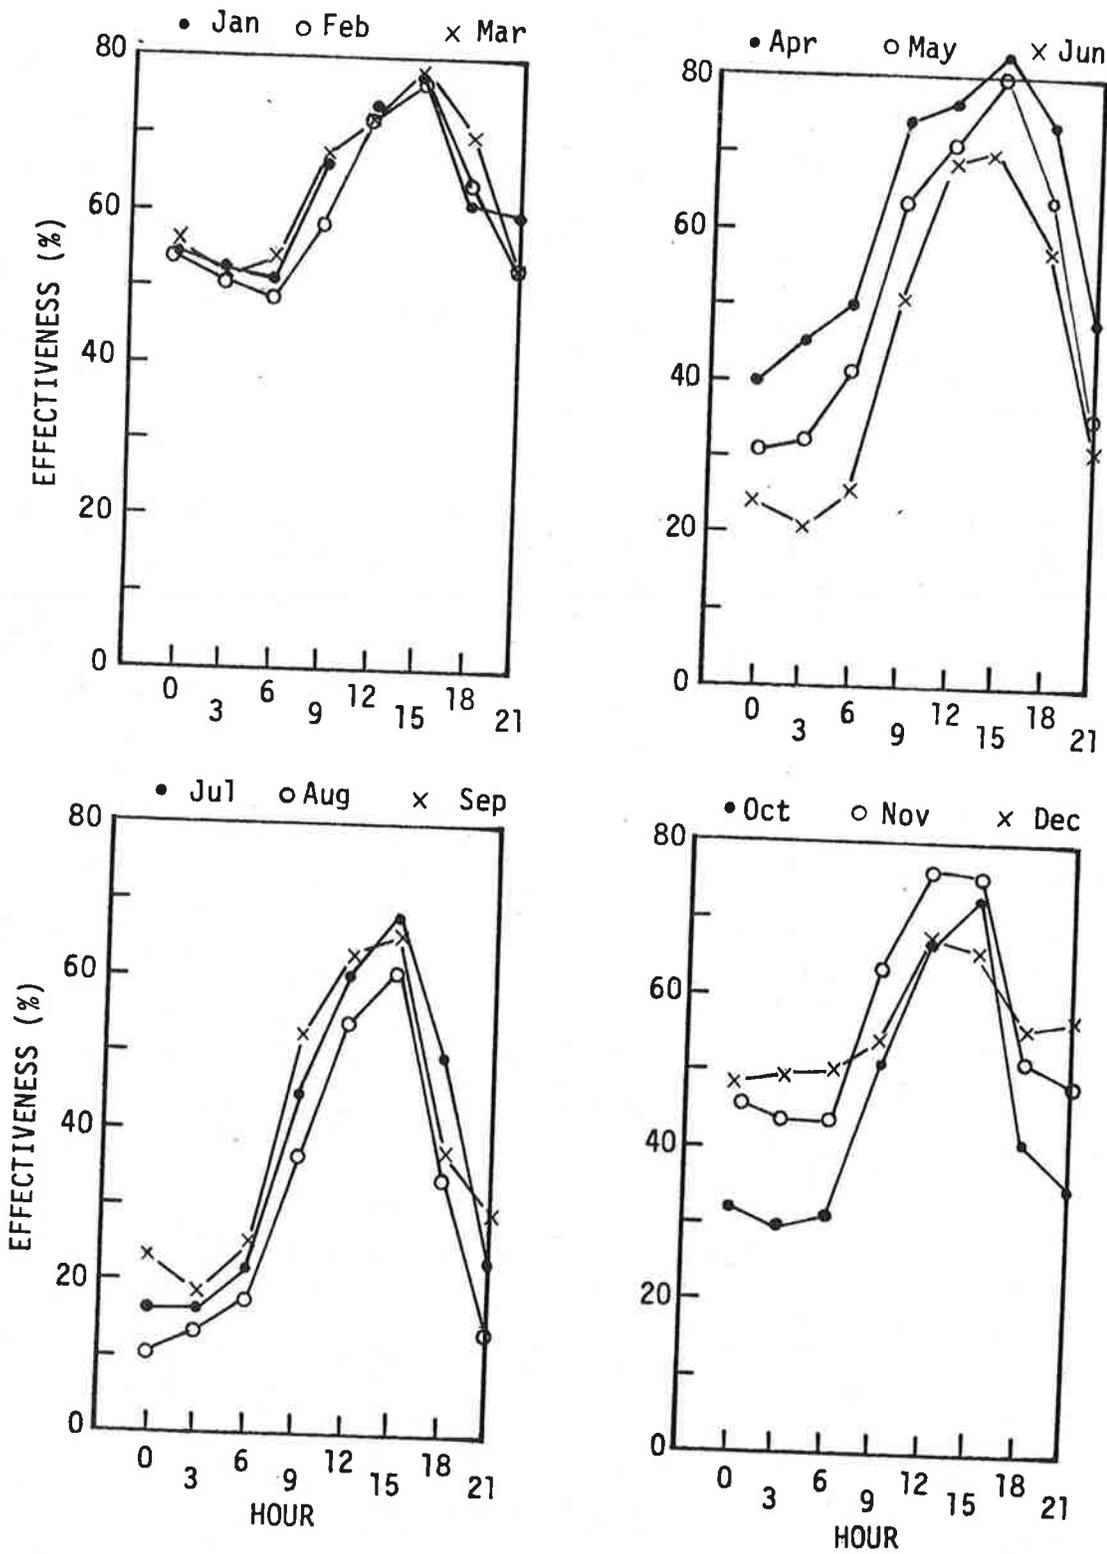


FIGURE 36. VAS EFFECTIVENESS FOR DTW RUNWAY 3/21 (CONCLUDED)

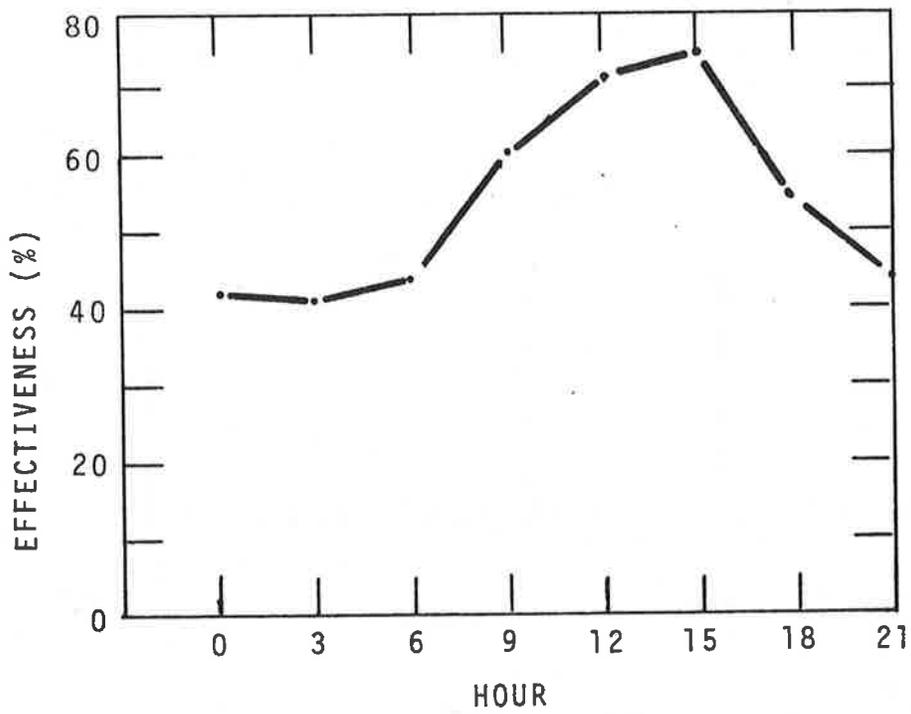
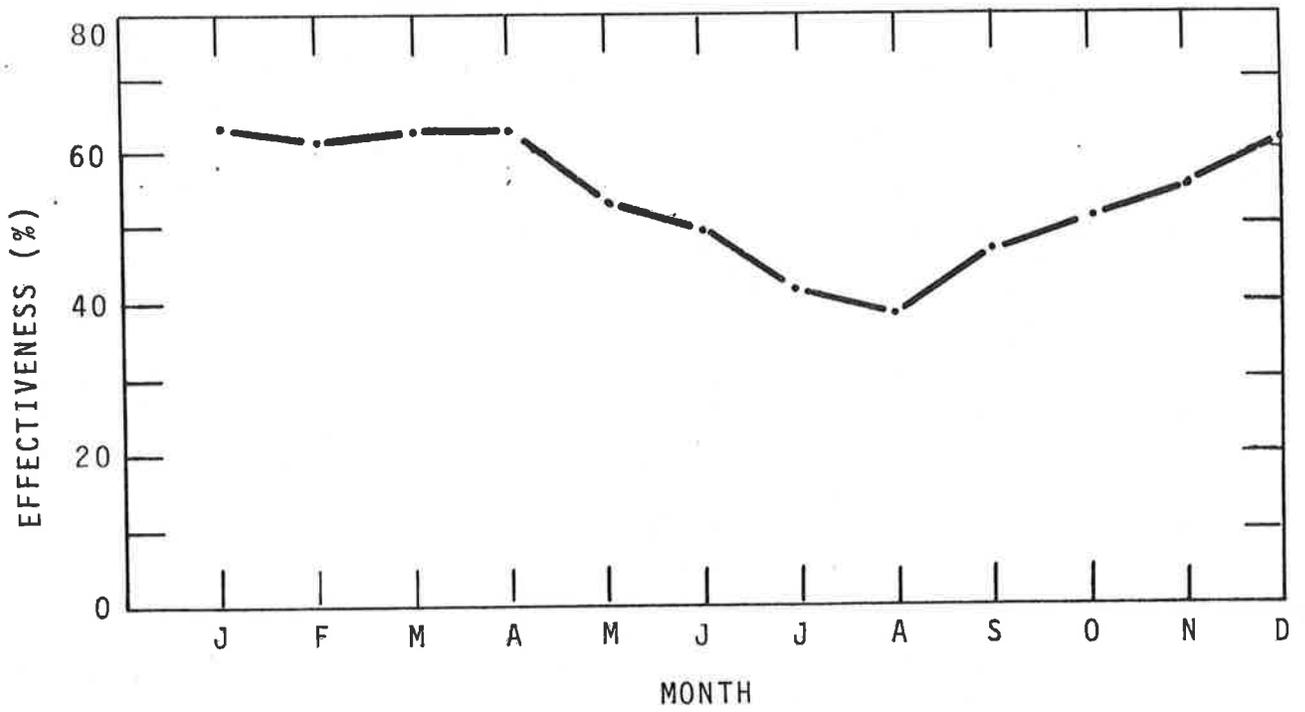


FIGURE 37. VAS EFFECTIVENESS FOR DTW RUNWAY 9/27

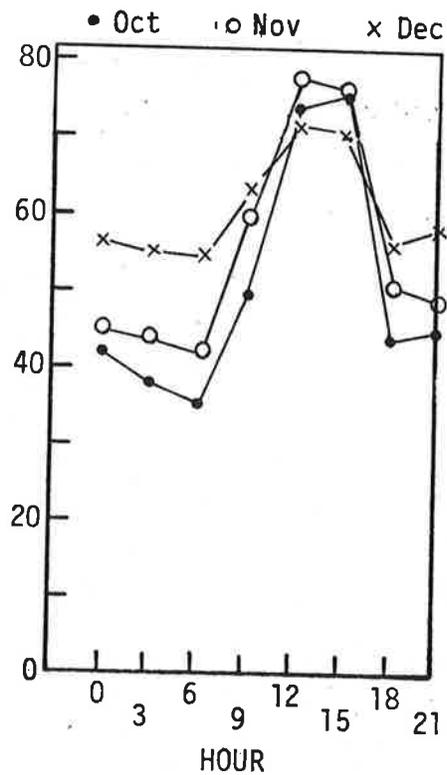
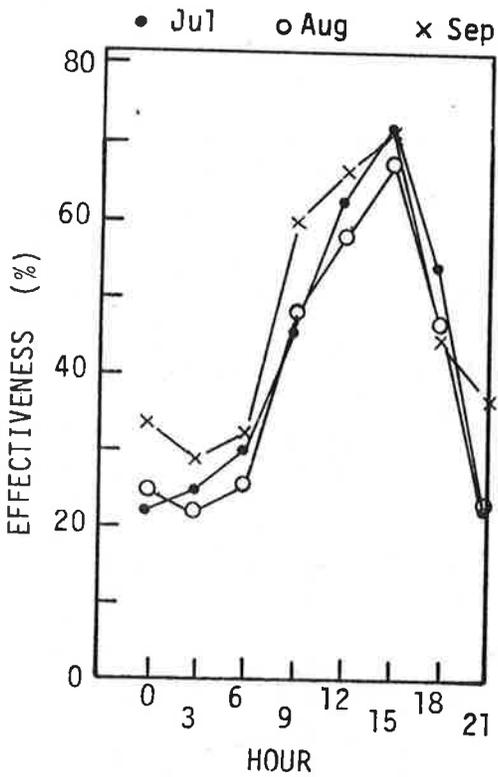
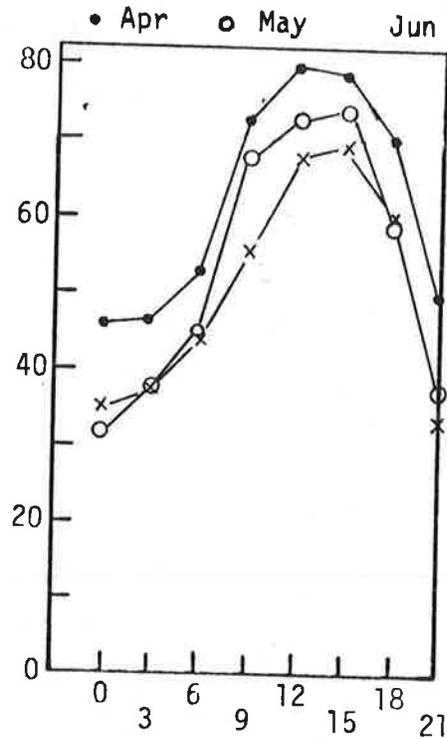
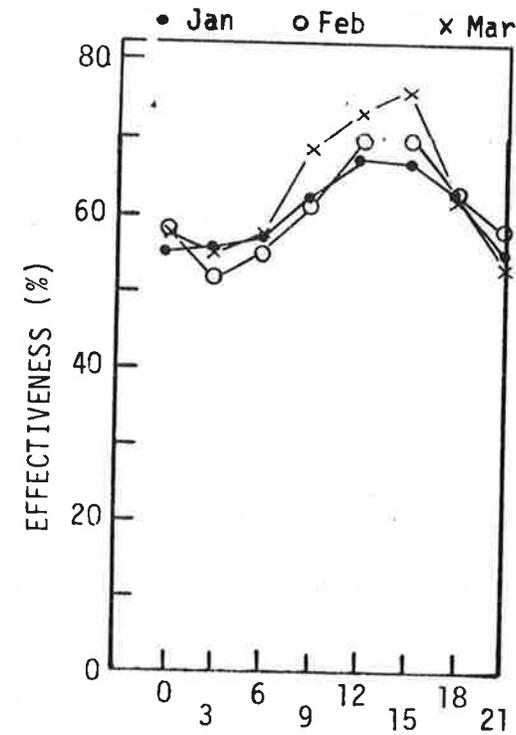


FIGURE 38. VAS EFFECTIVENESS FOR DTW RUNWAY 9/27 (CONCLUDED)

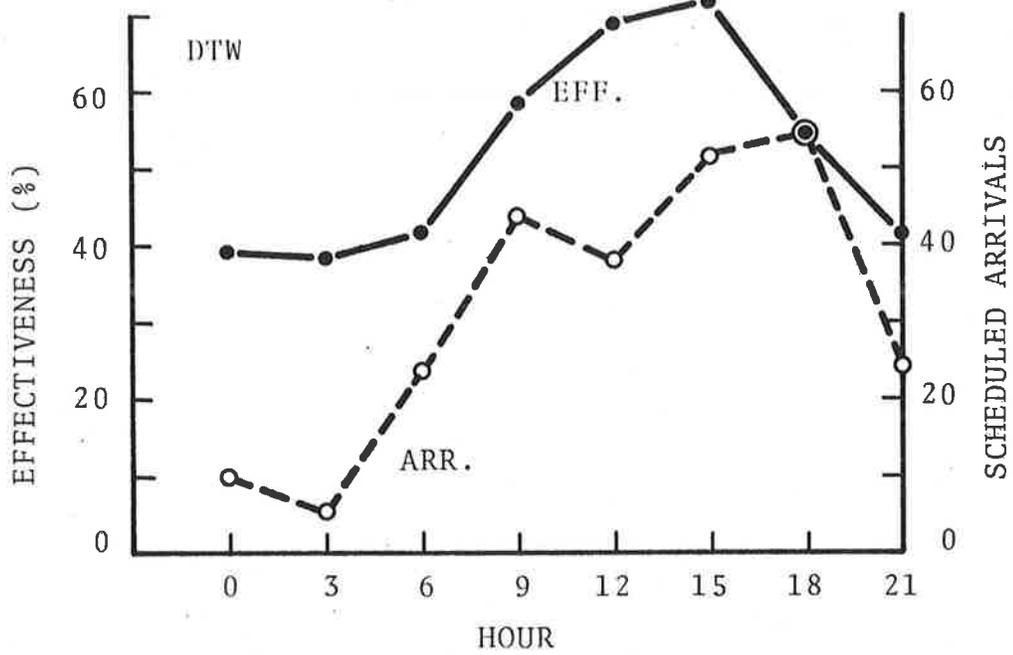


FIGURE 39. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR DTW

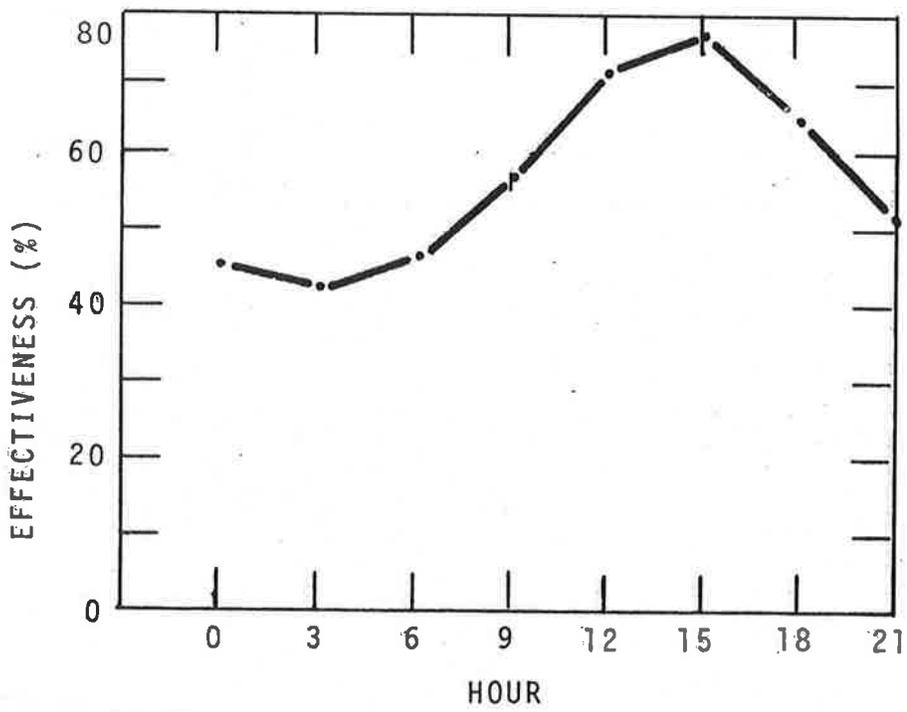
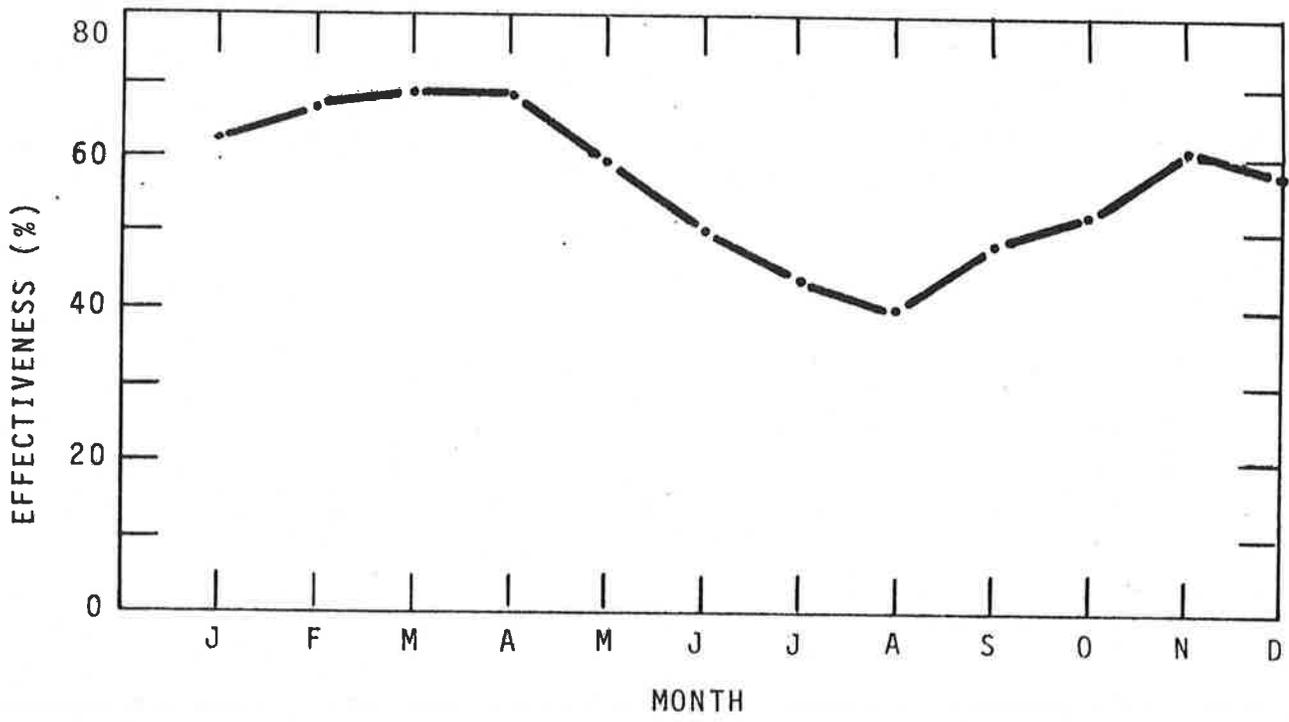


FIGURE 40. VAS EFFECTIVENESS FOR JFK RUNWAY 4/22

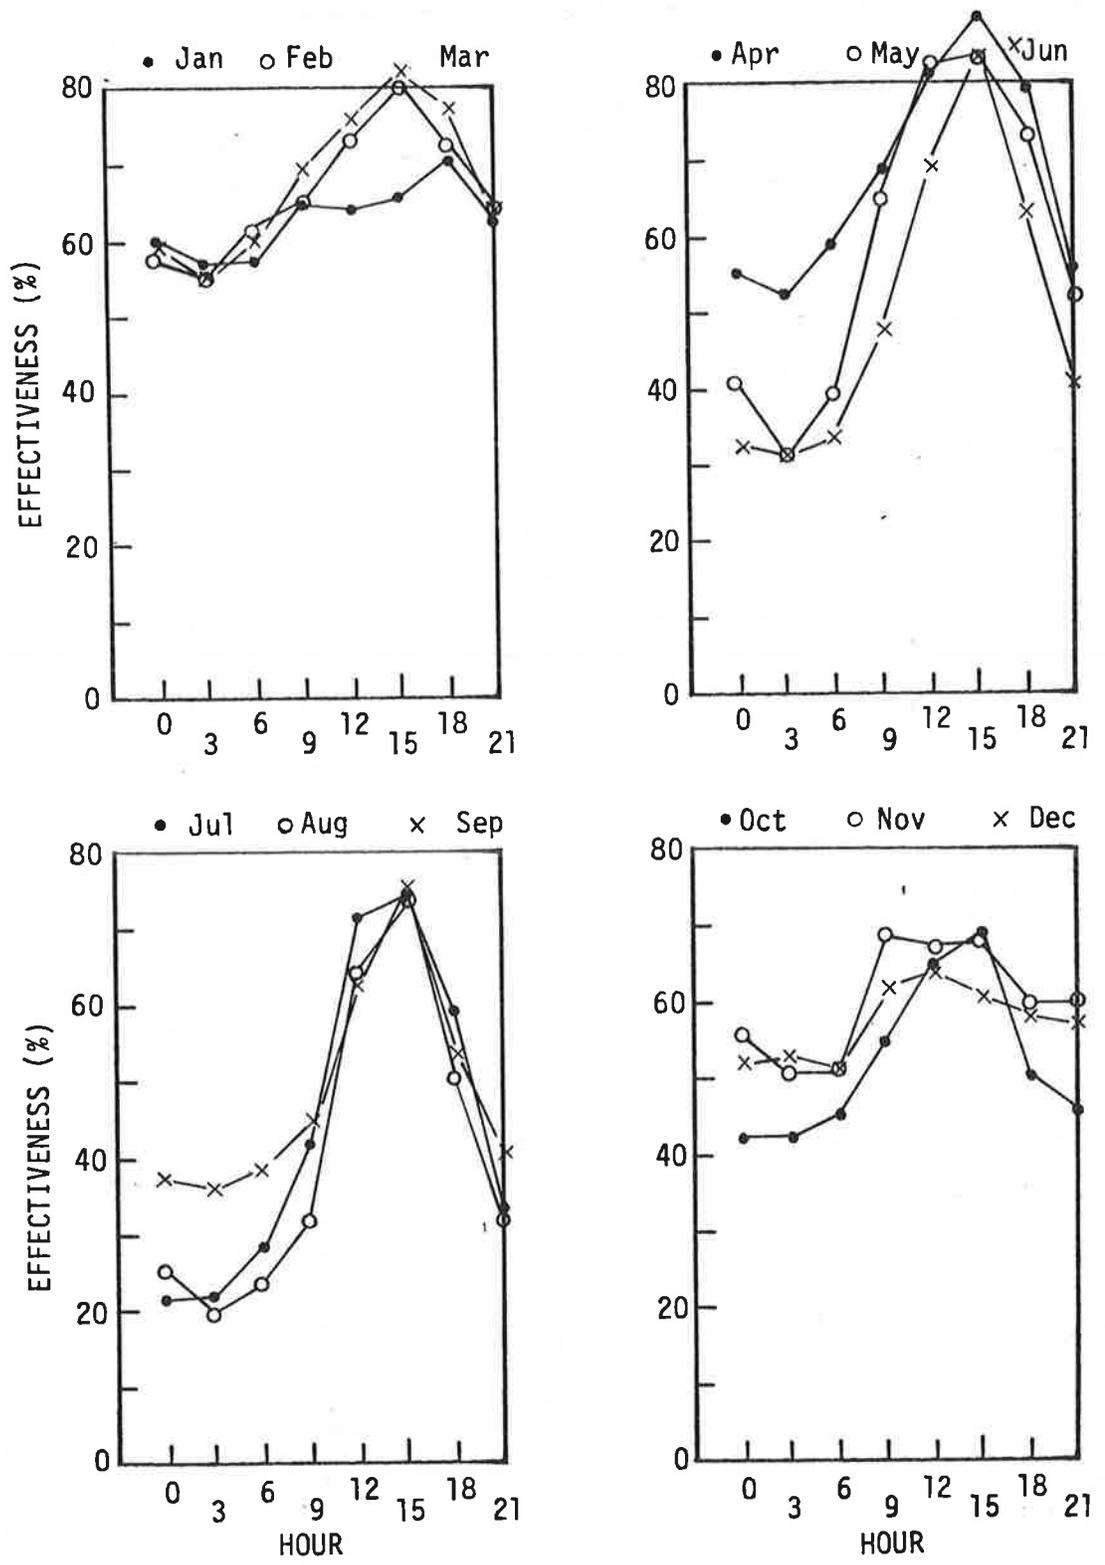


FIGURE 41. VAS EFFECTIVENESS FOR JFK RUNWAY 4/22 (CONCLUDED)

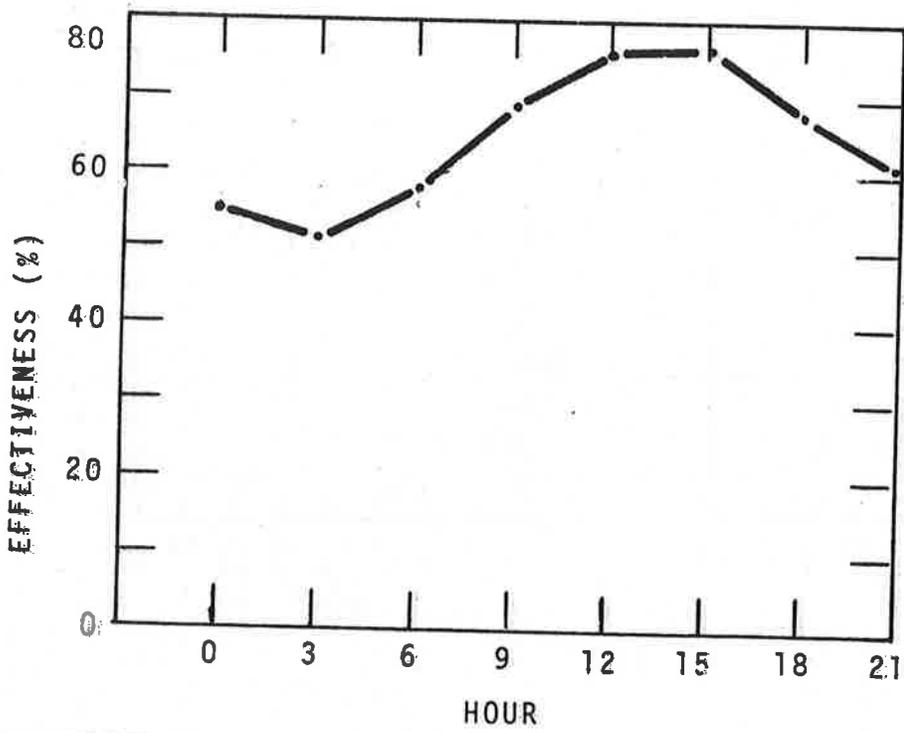
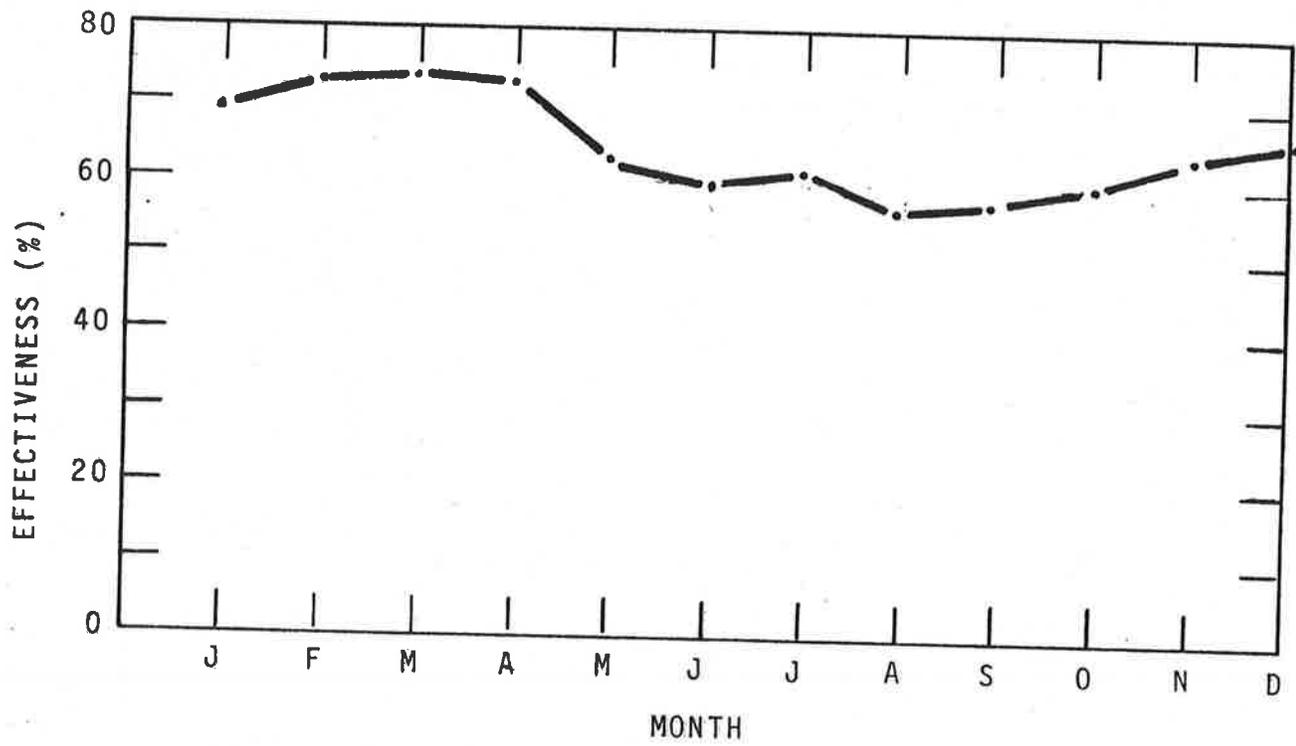


FIGURE 42. VAS EFFECTIVENESS FOR JFK RUNWAY 13/31

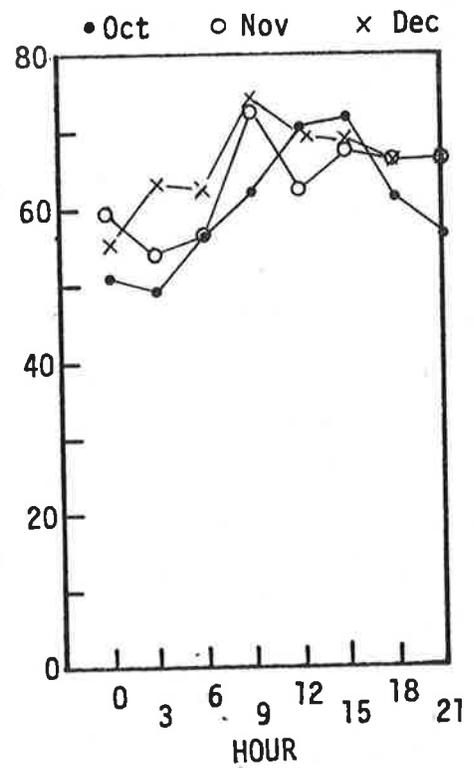
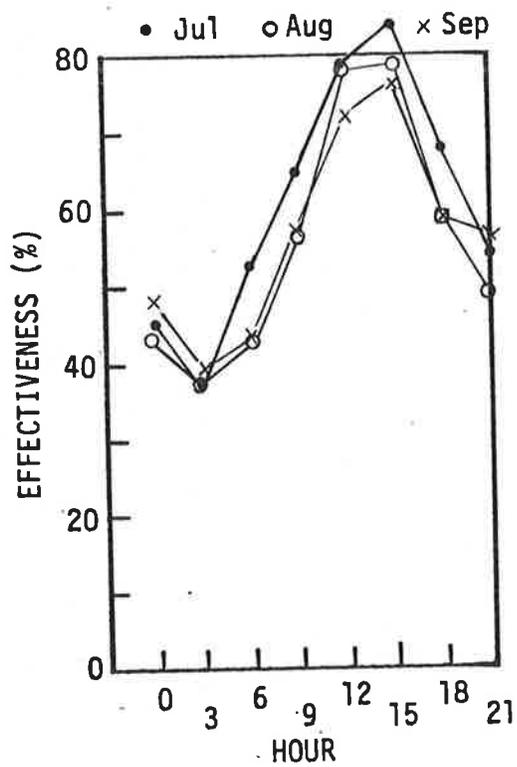
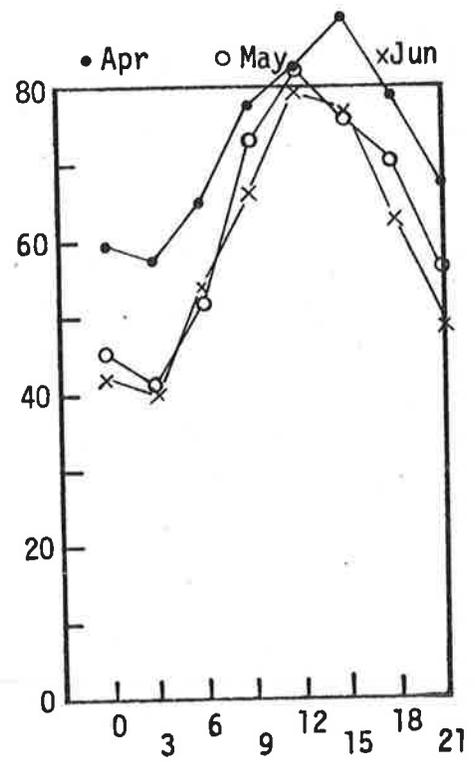
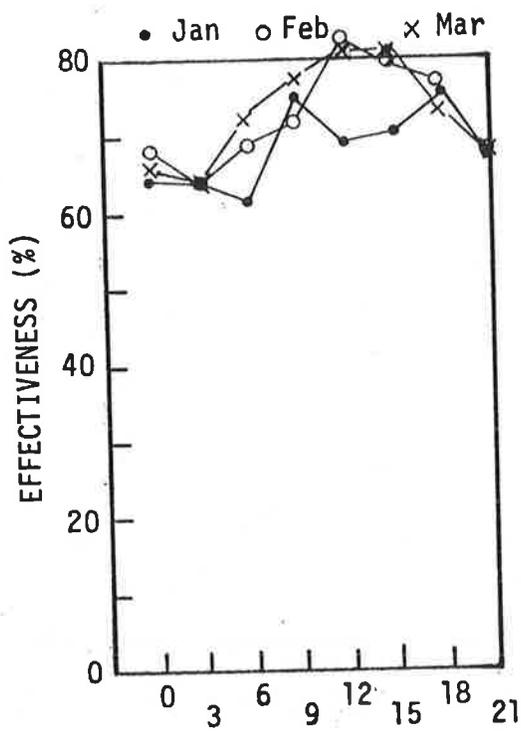


FIGURE 43. VAS EFFECTIVENESS FOR JFK RUNWAY 13/31 (CONCLUDED)

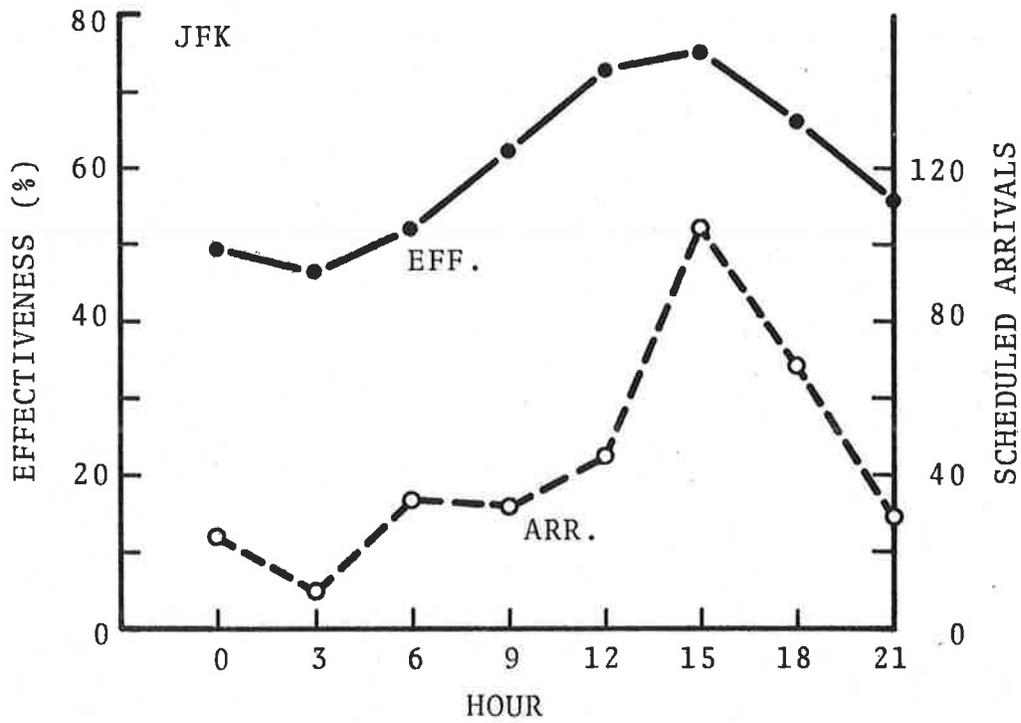


FIGURE 44. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR JFK

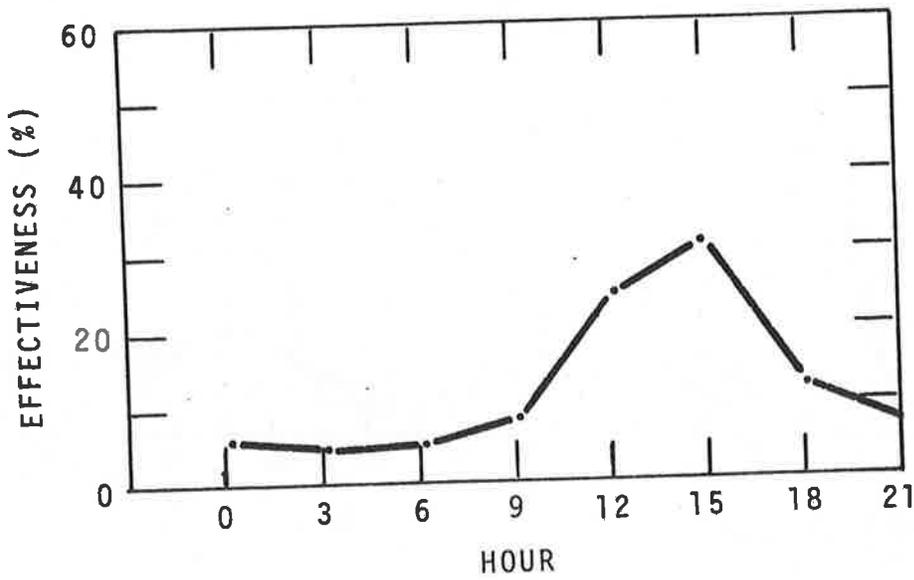
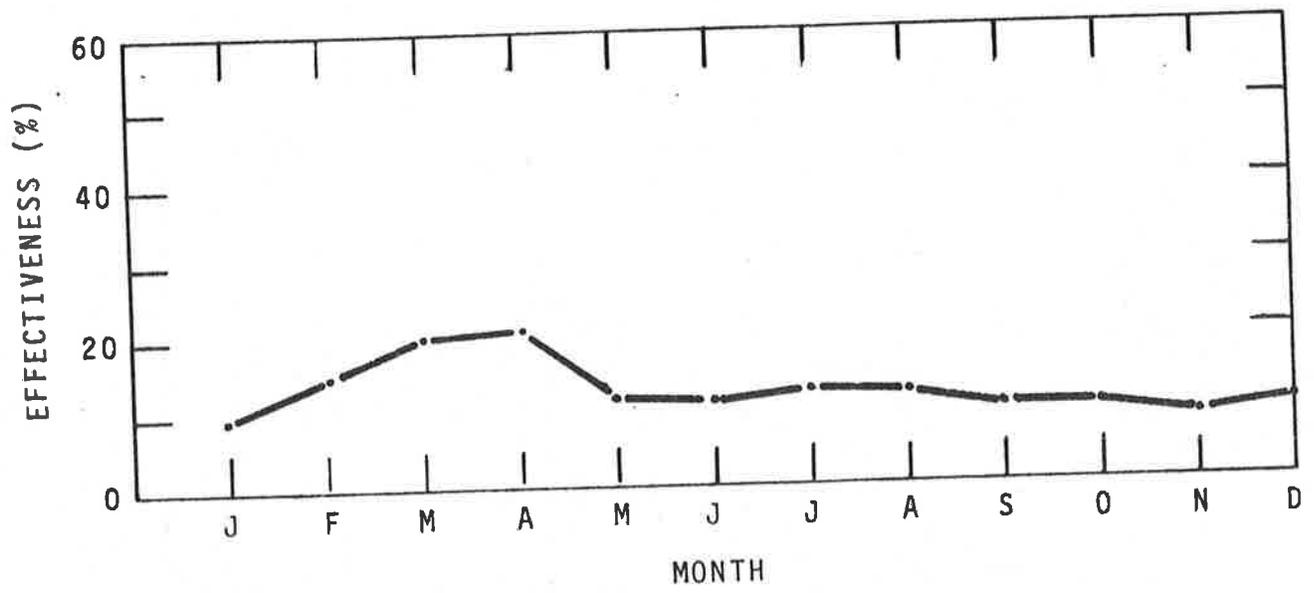


FIGURE 45. VAS EFFECTIVENESS FOR LAX RUNWAY 6/24

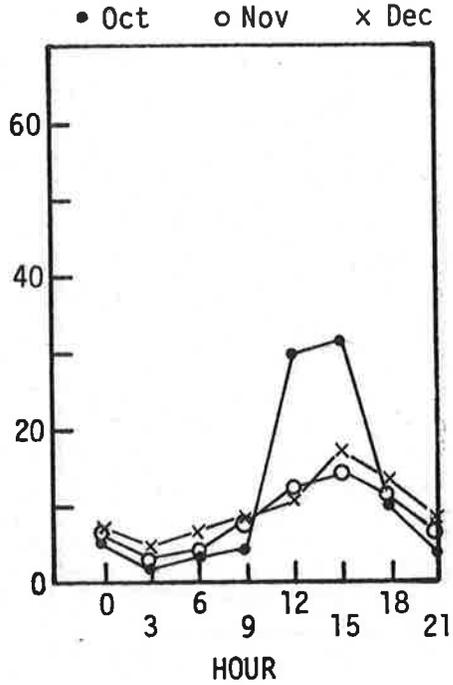
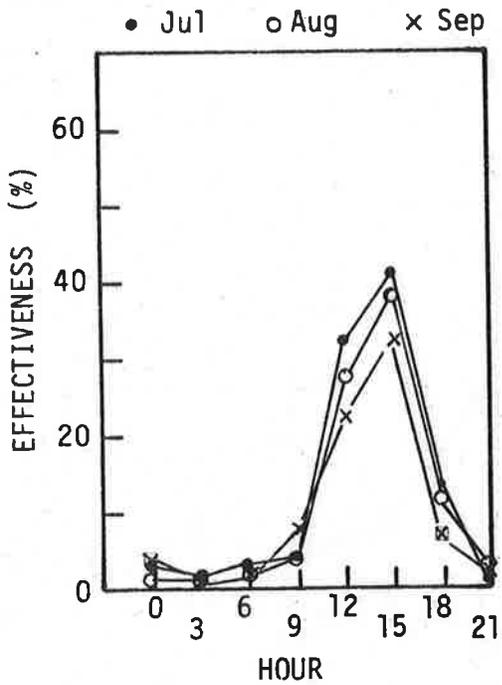
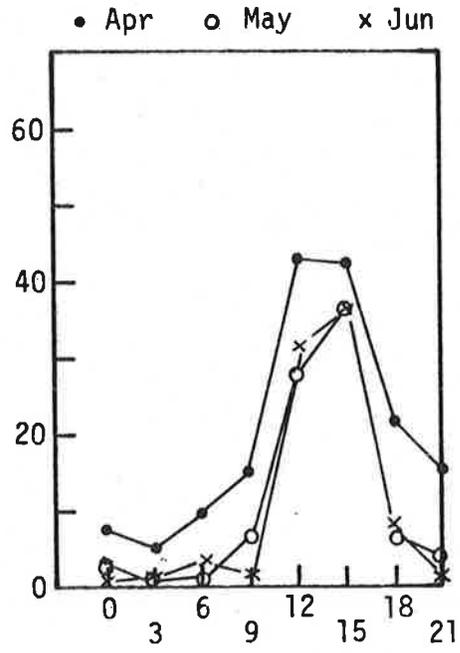
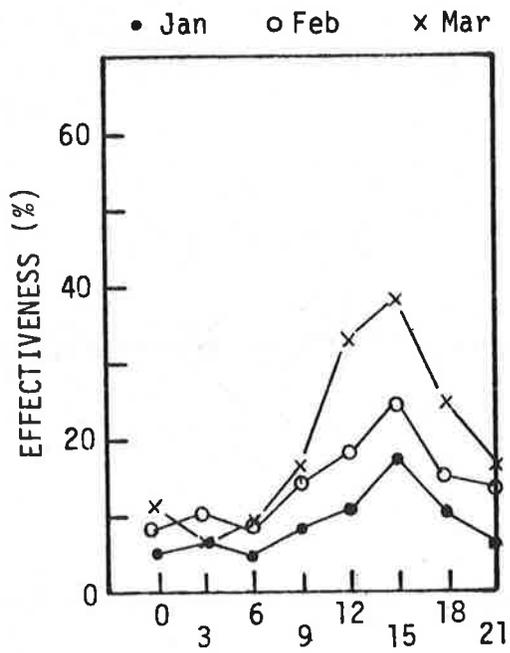


FIGURE 46. VAS EFFECTIVENESS FOR LAX RUNWAY 6/24 (CONCLUDED)

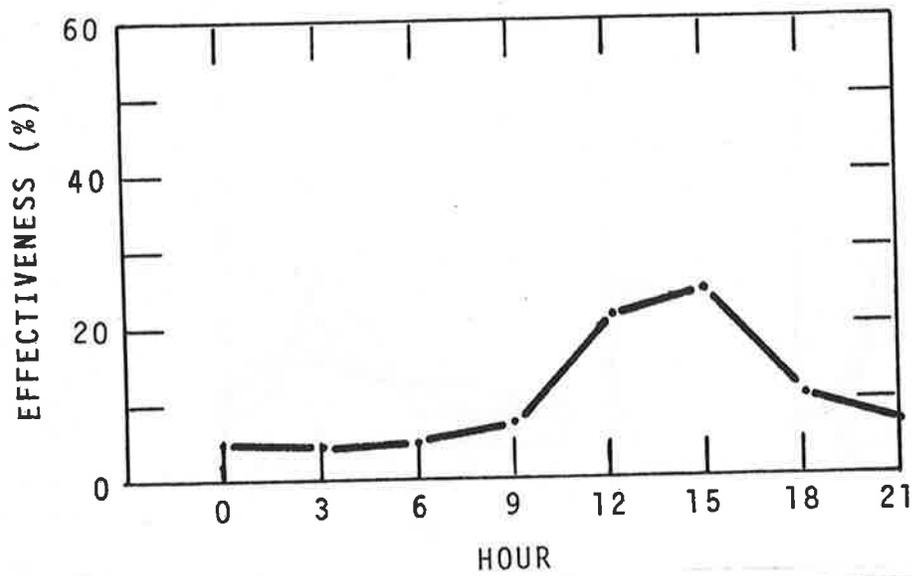
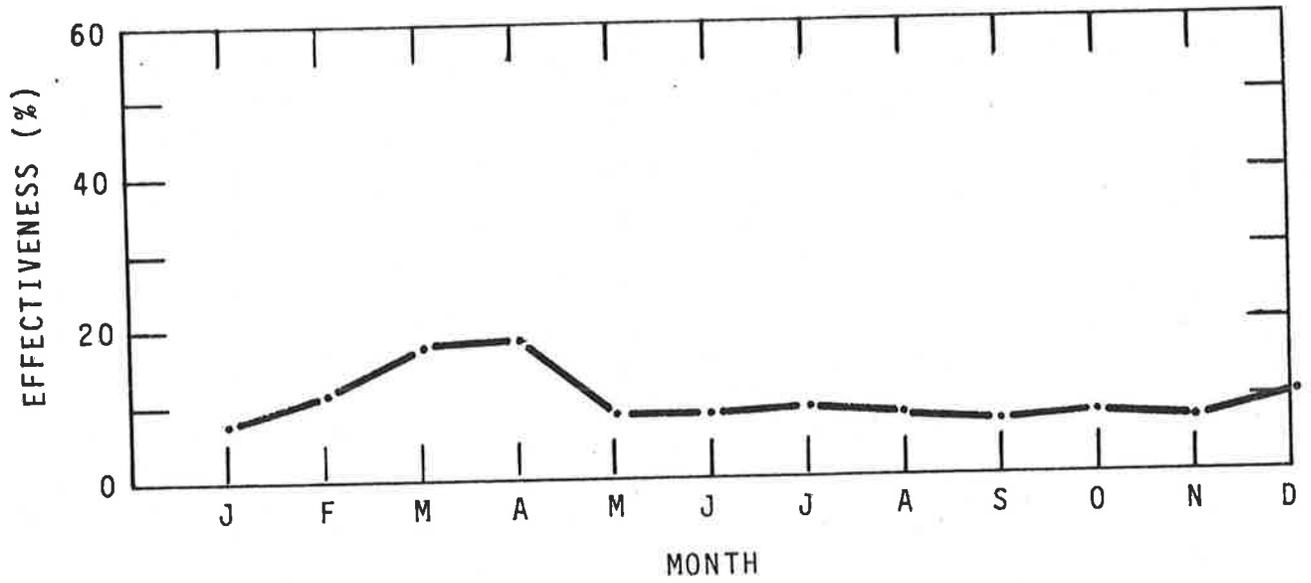


FIGURE 47. VAS EFFECTIVENESS FOR LAX RUNWAY 7/25

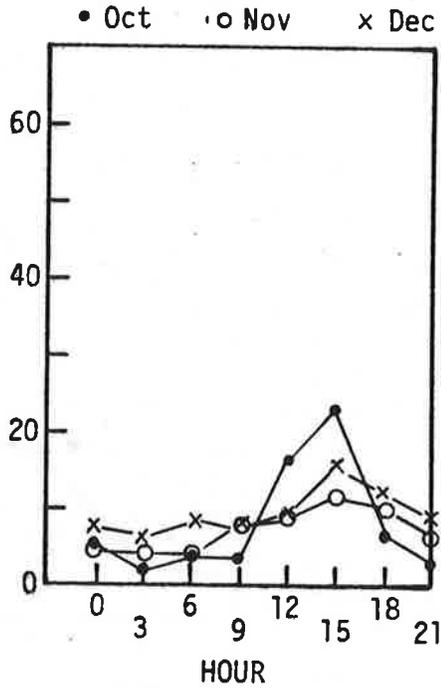
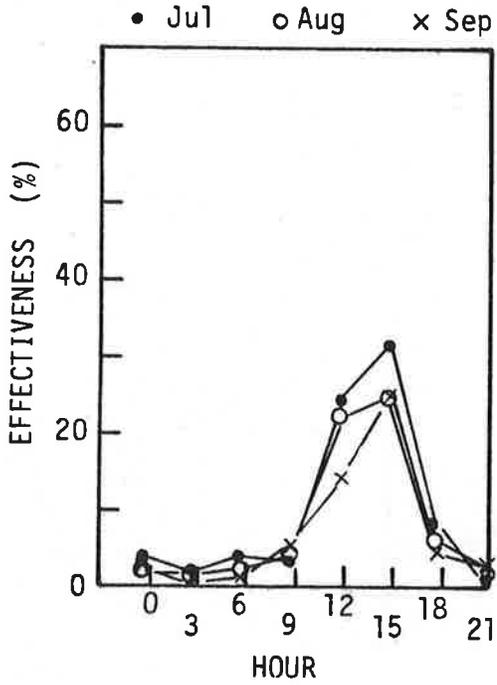
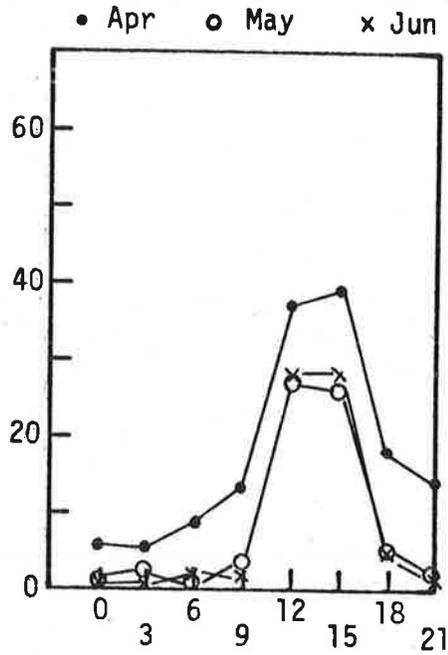
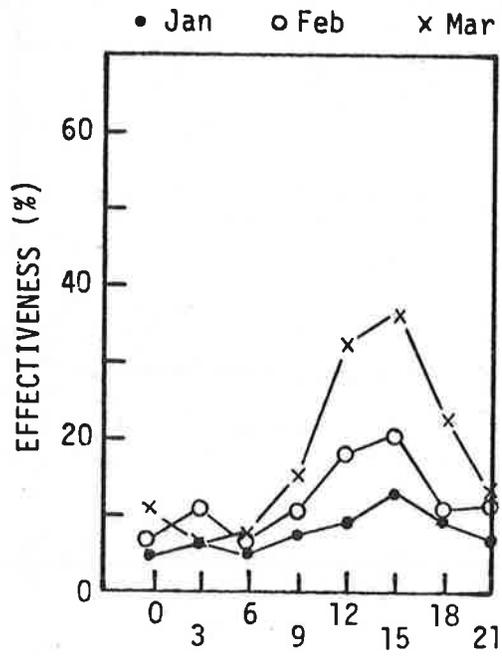


FIGURE 48. VAS EFFECTIVENESS FOR LAX RUNWAY 7/25 (CONCLUDED)

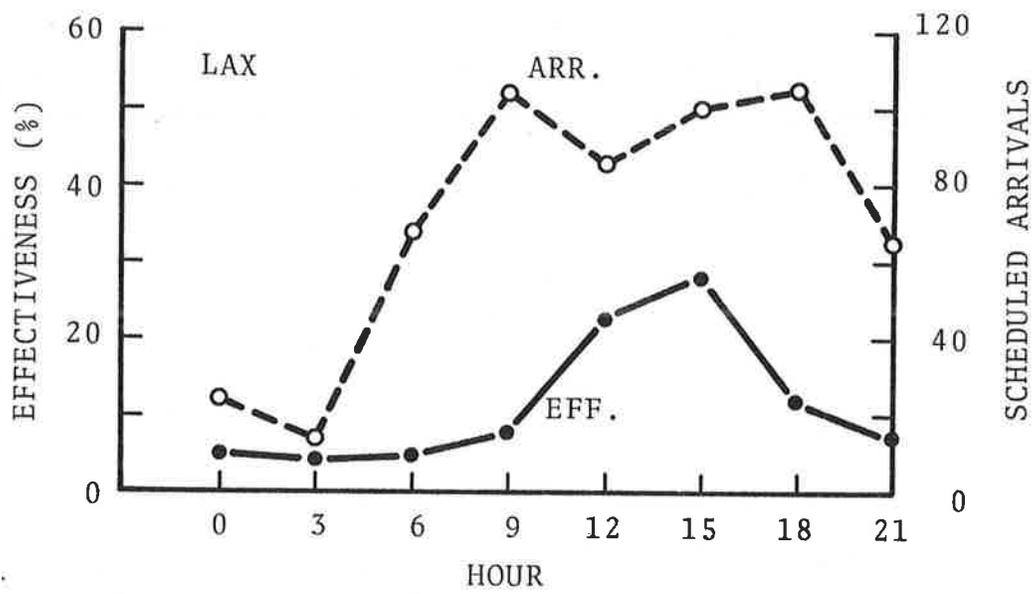


FIGURE 49. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR LAX

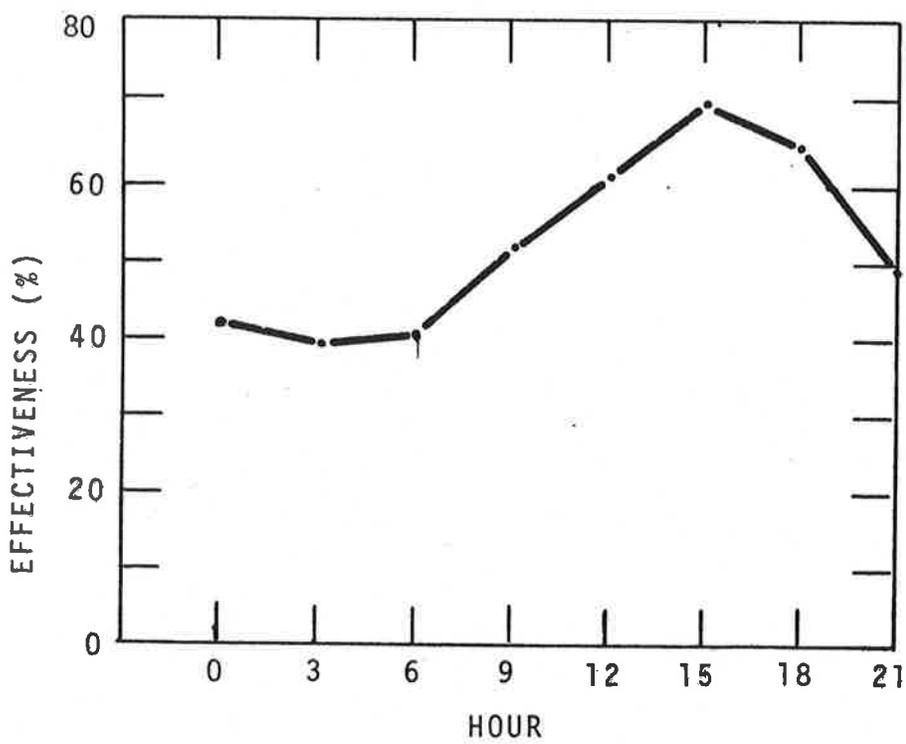
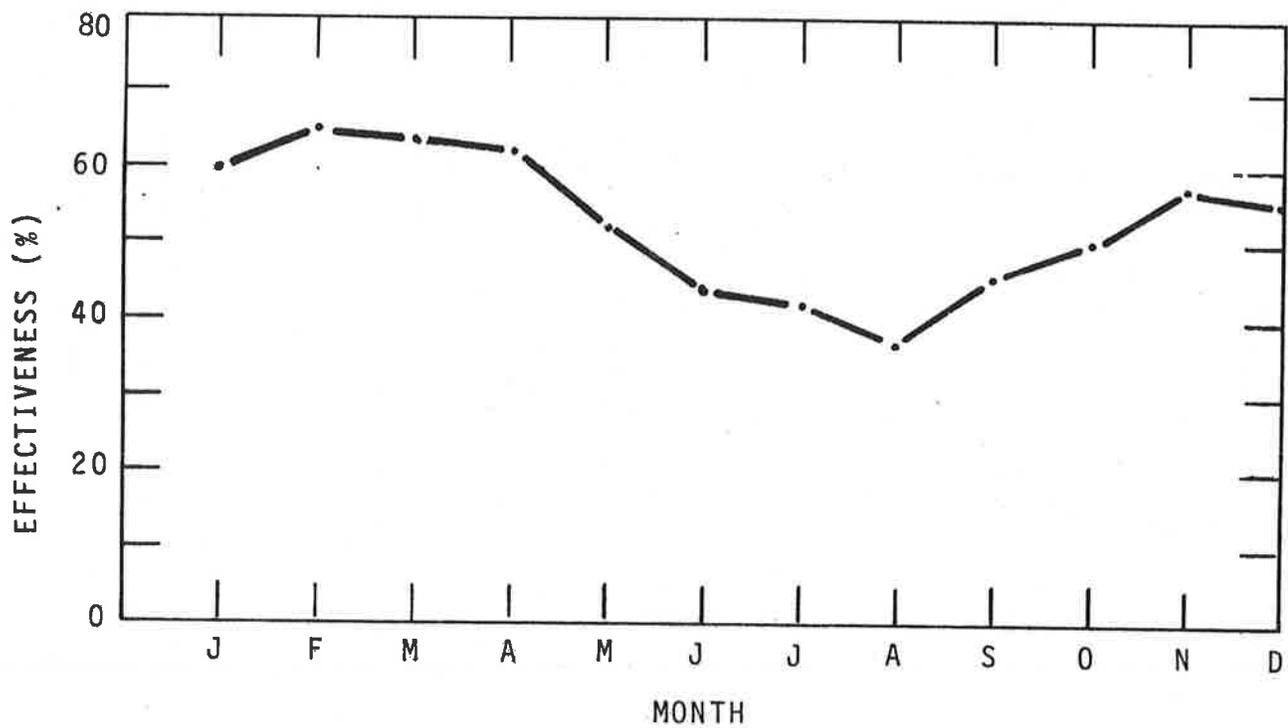


FIGURE 50. VAS EFFECTIVENESS FOR LGA RUNWAY 4/22

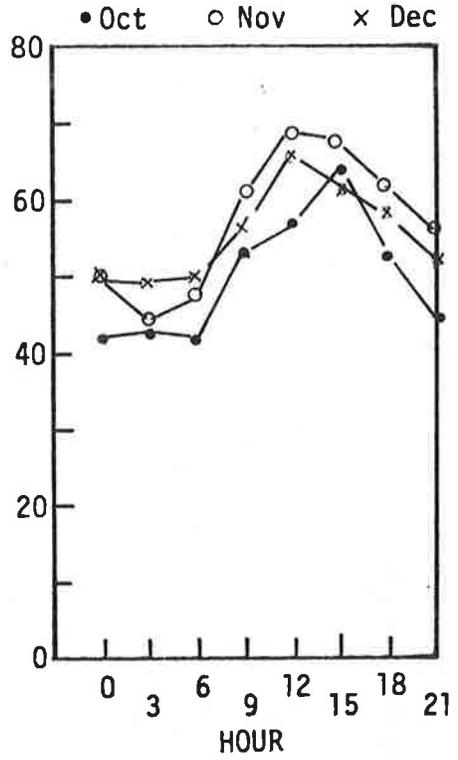
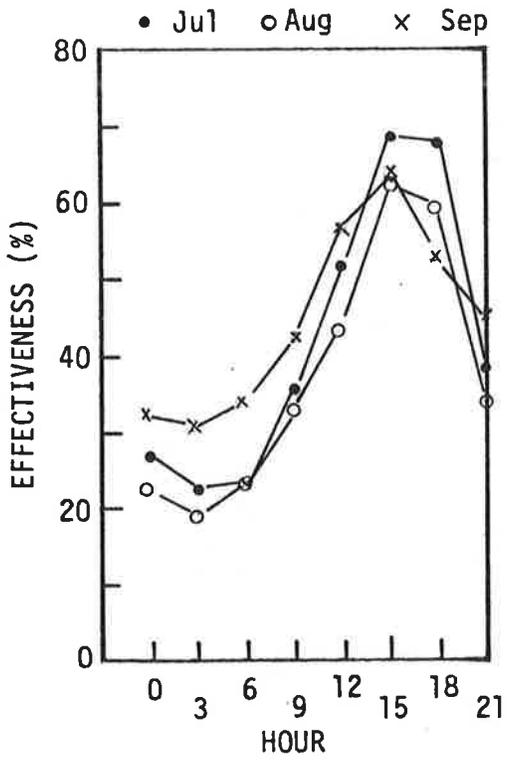
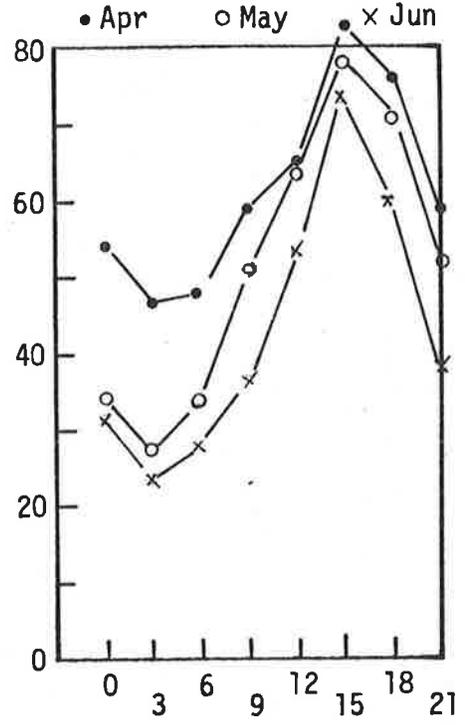
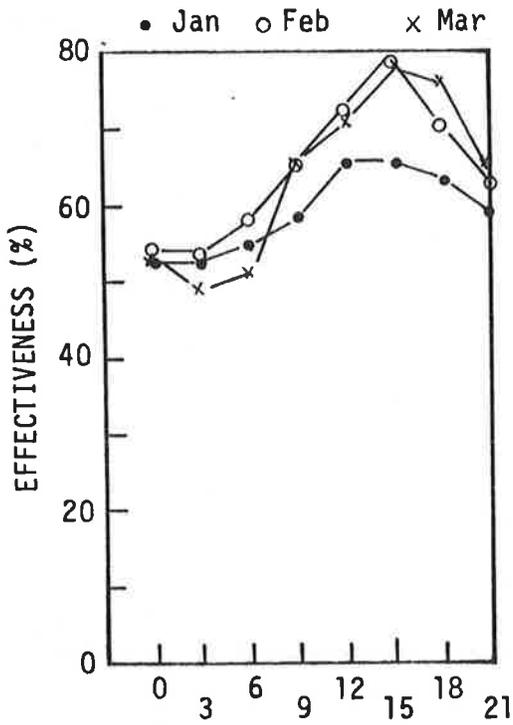


FIGURE 51. VAS EFFECTIVENESS FOR LGA RUNWAY 4/22 (CONCLUDED)

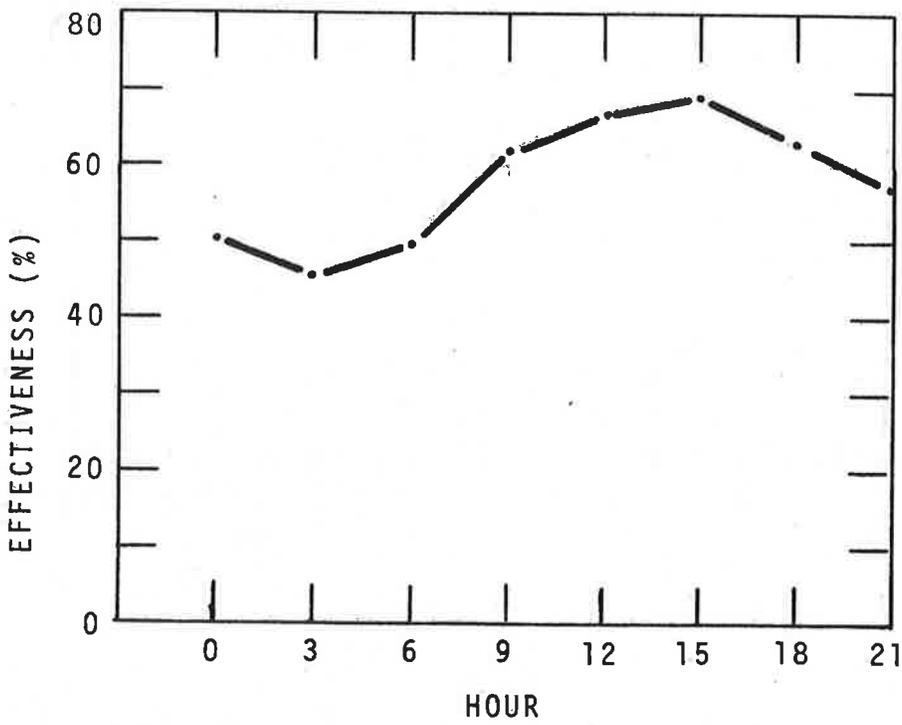
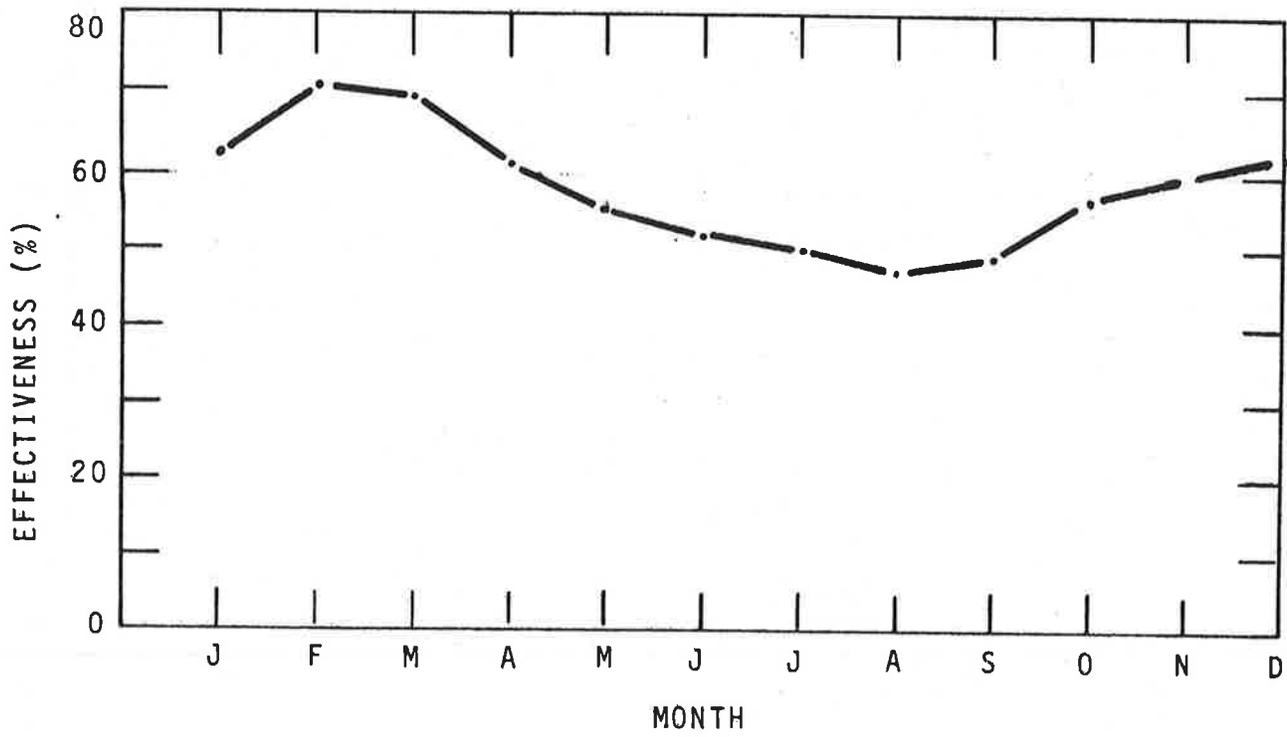


FIGURE 52. VAS EFFECTIVENESS FOR LGA RUNWAY 13/31

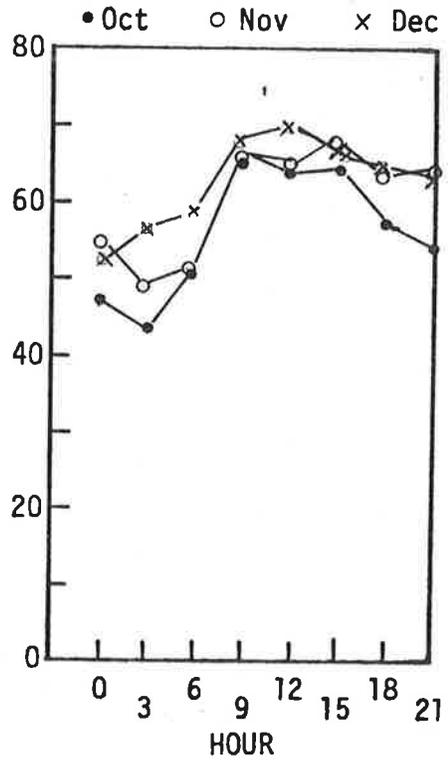
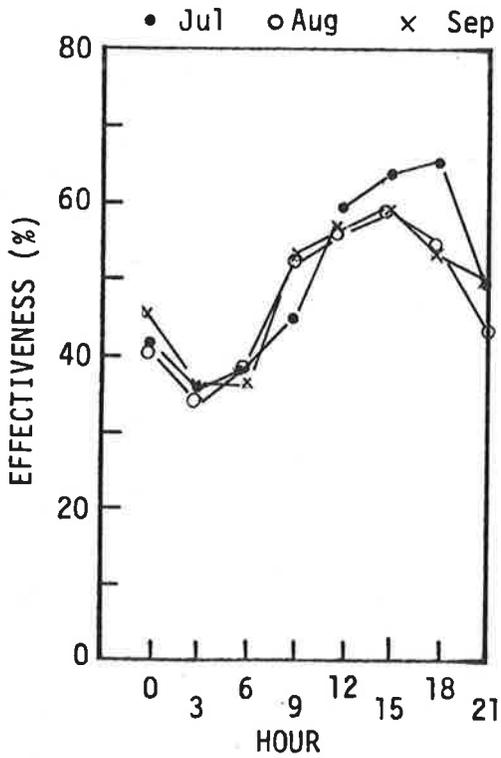
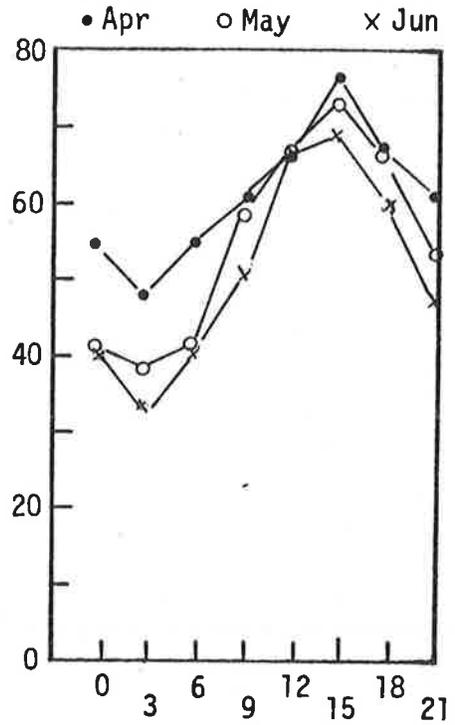
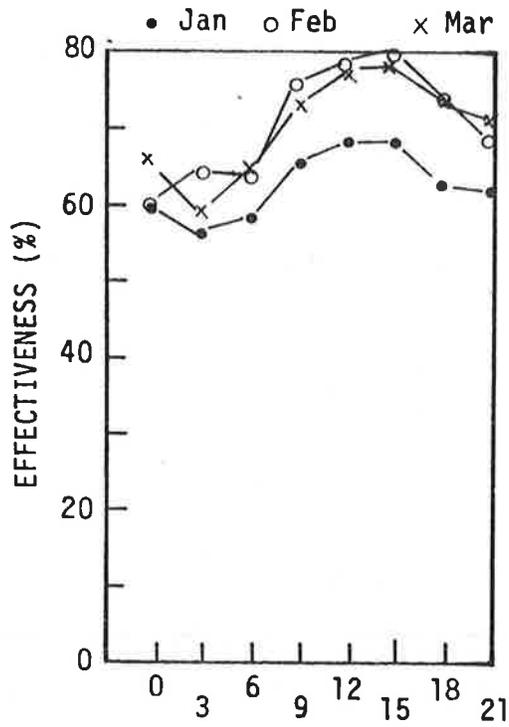


FIGURE 53. VAS EFFECTIVENESS FOR LGA RUNWAY 13/31 (CONCLUDED)

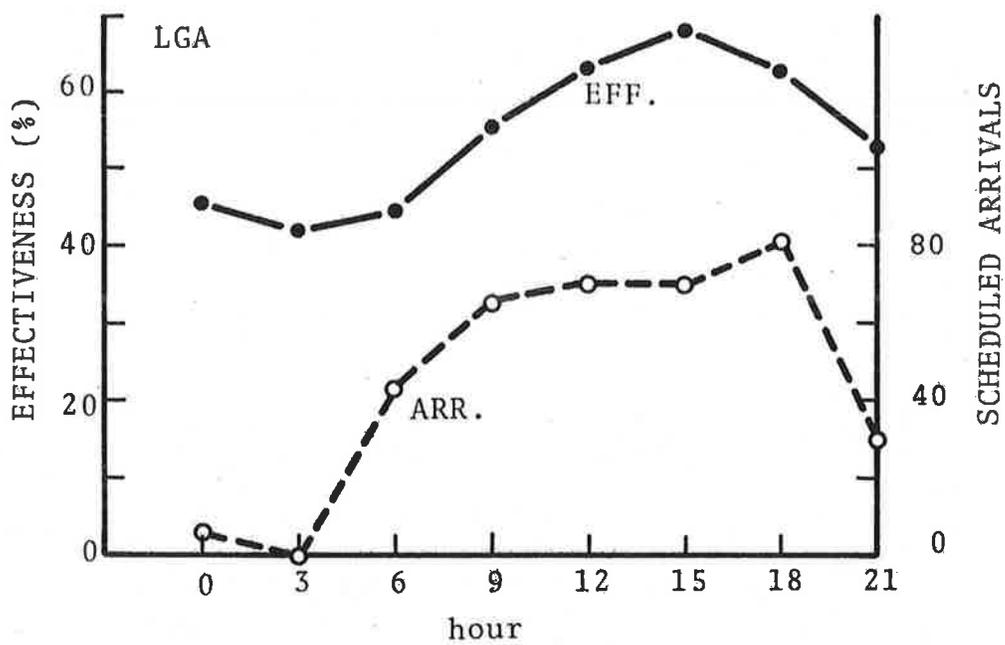


FIGURE 54. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR LGA

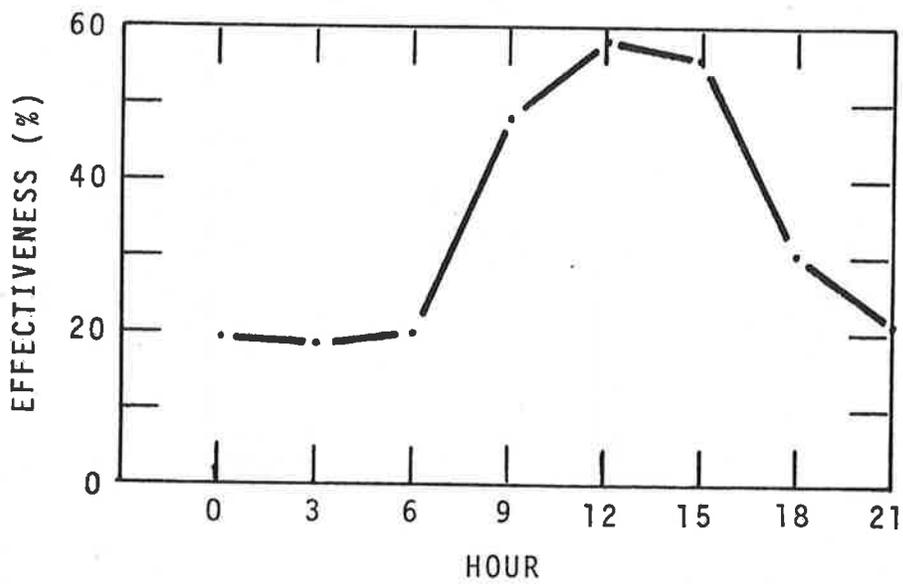
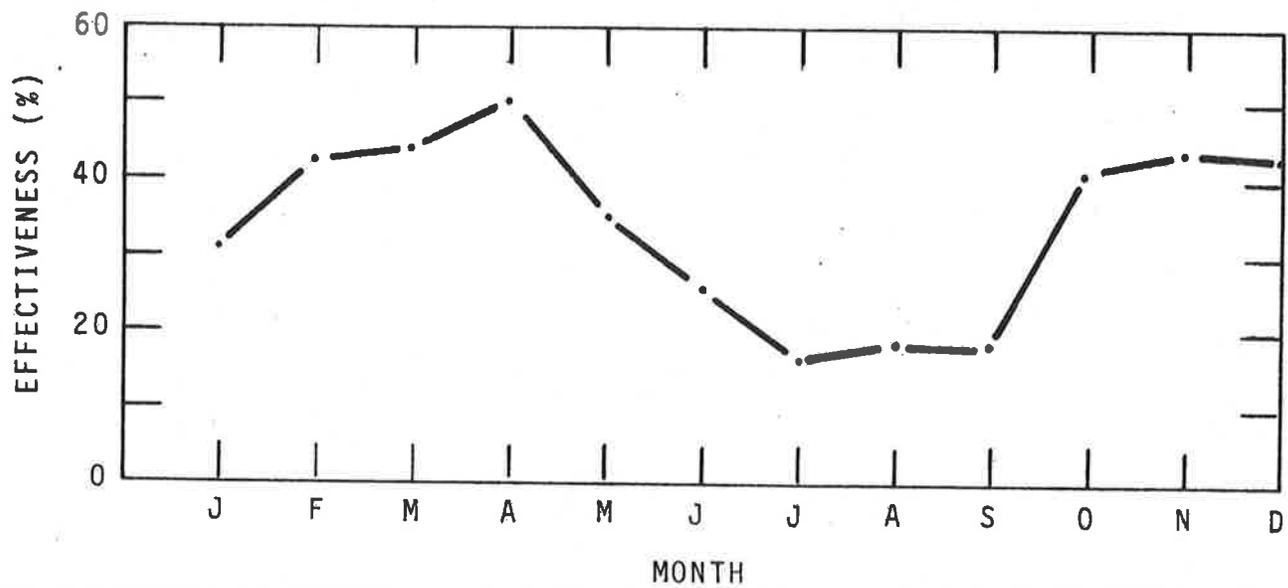


FIGURE 55. VAS EFFECTIVENESS FOR MIA RUNWAY 9/27

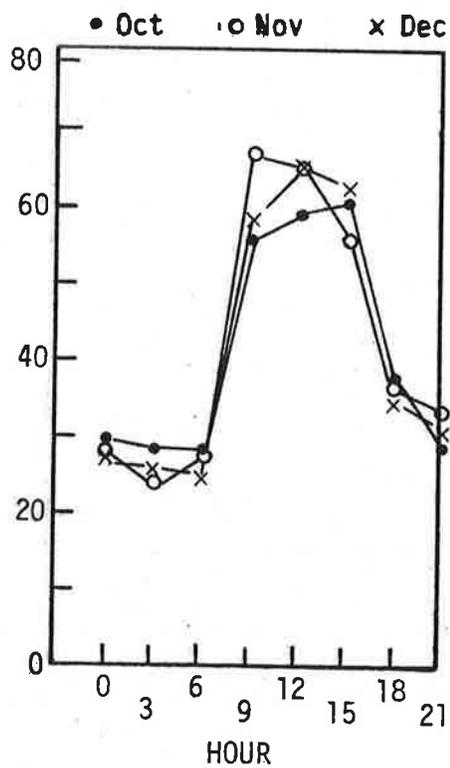
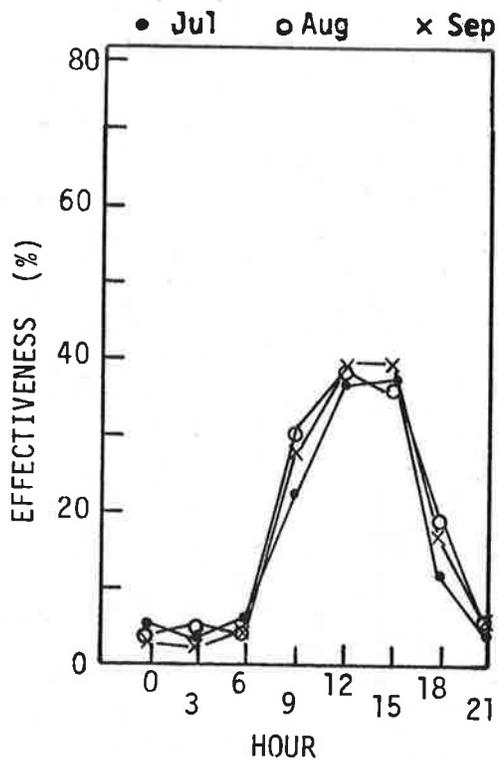
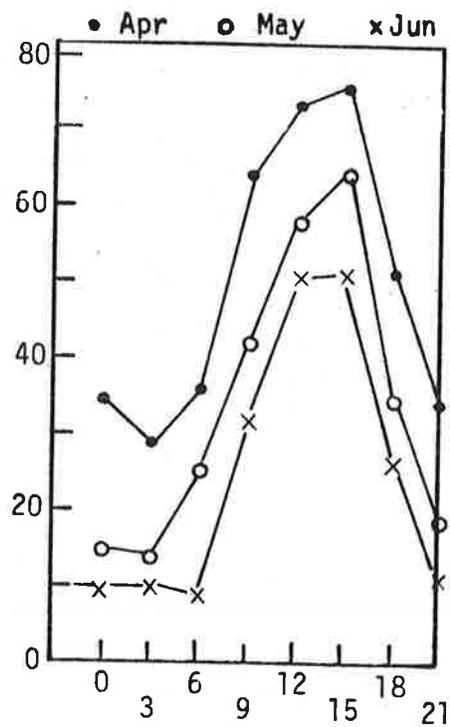
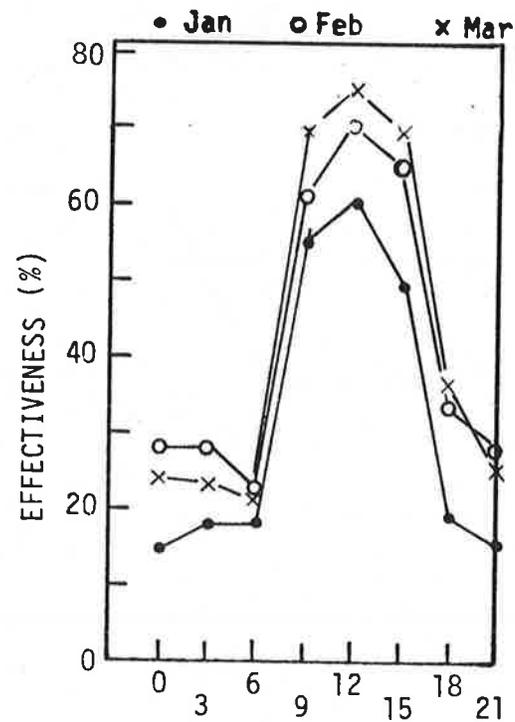


FIGURE 56. VAS EFFECTIVENESS FOR MIA RUNWAY 9/27 (CONCLUDED)

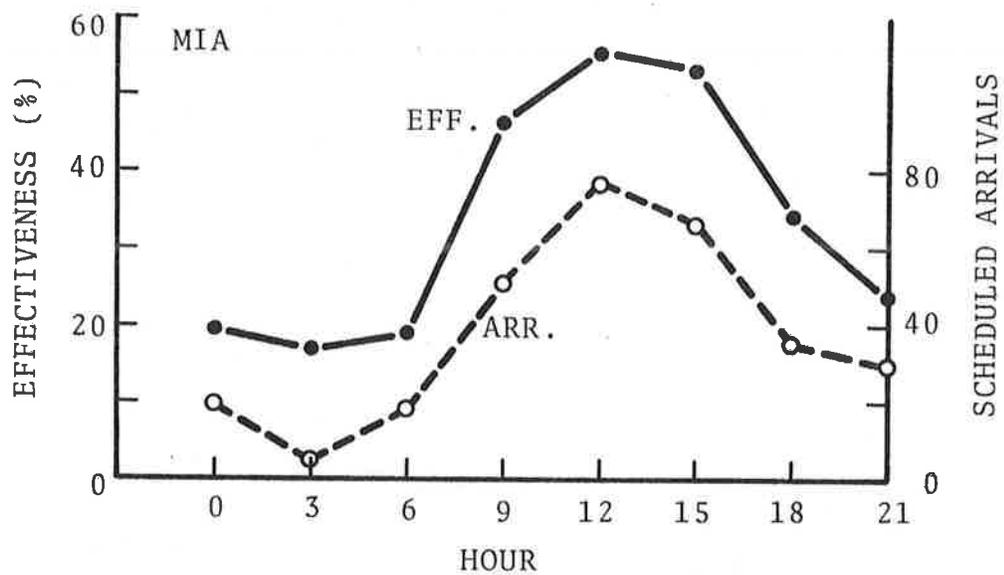


FIGURE 57. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR MIA

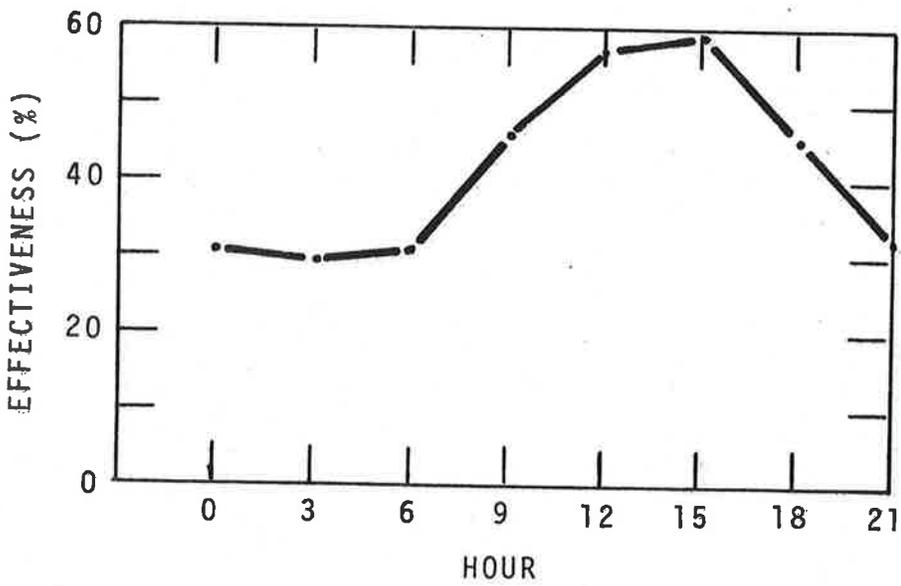
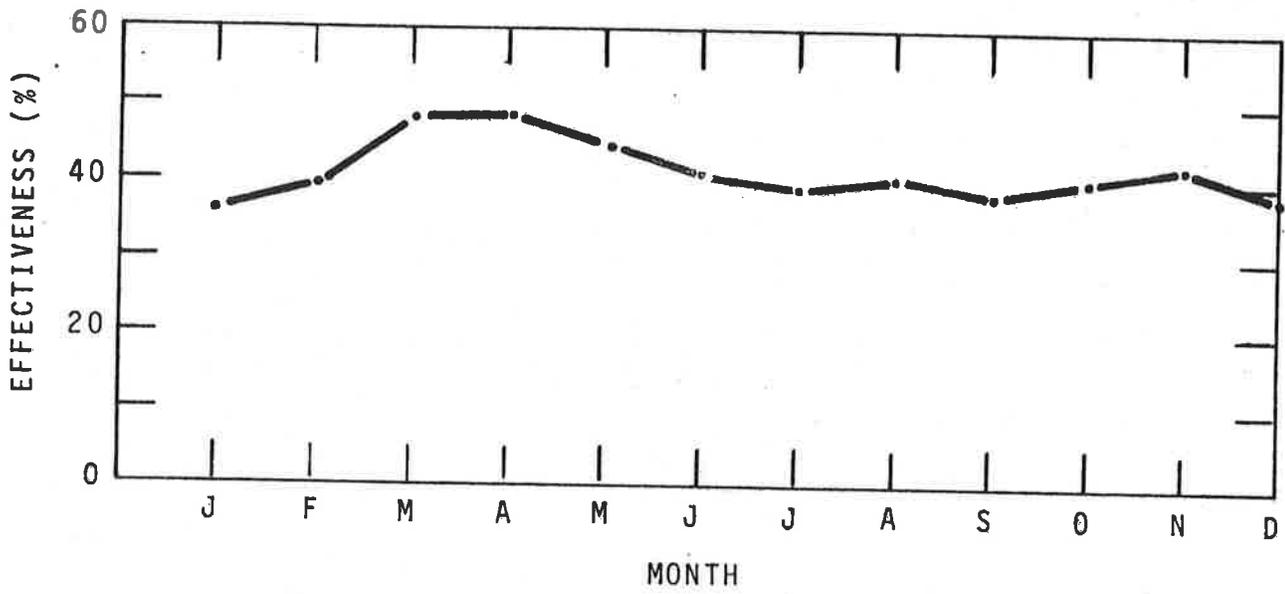


FIGURE 58. VAS EFFECTIVENESS FOR MSP RUNWAY 11/29

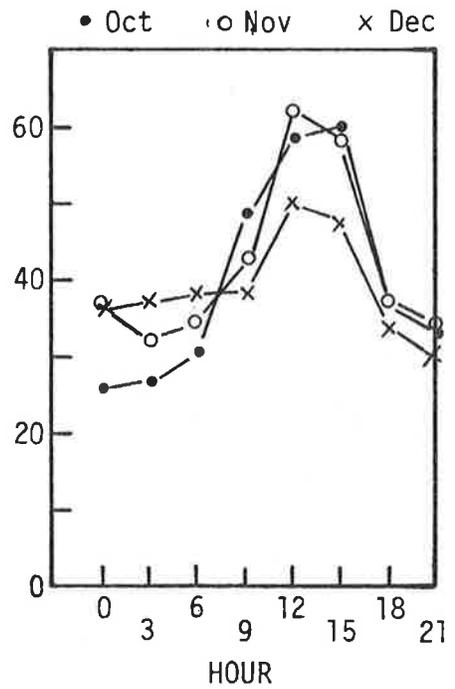
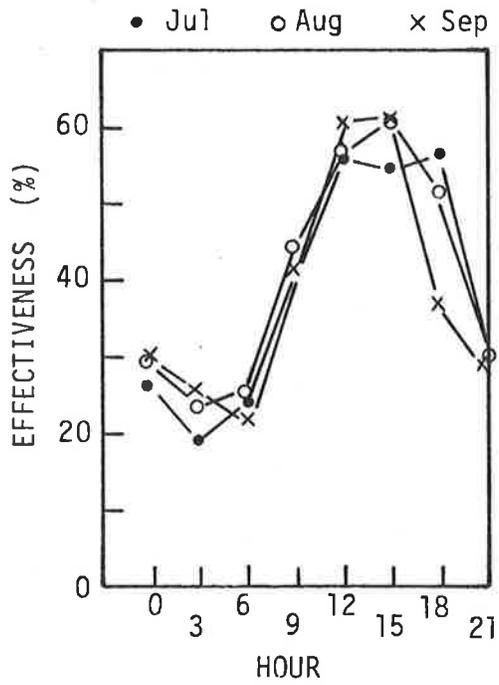
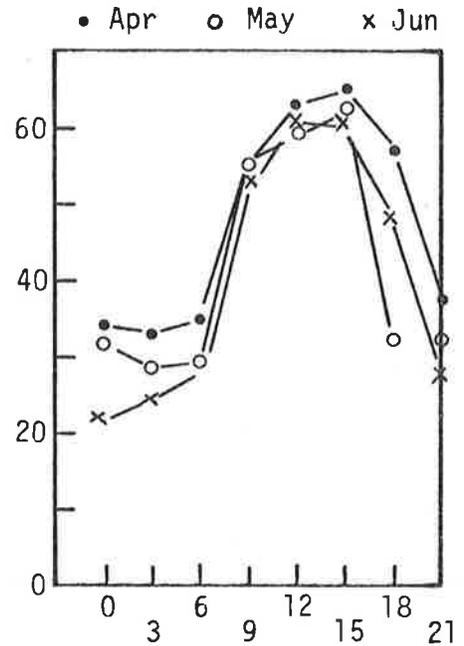
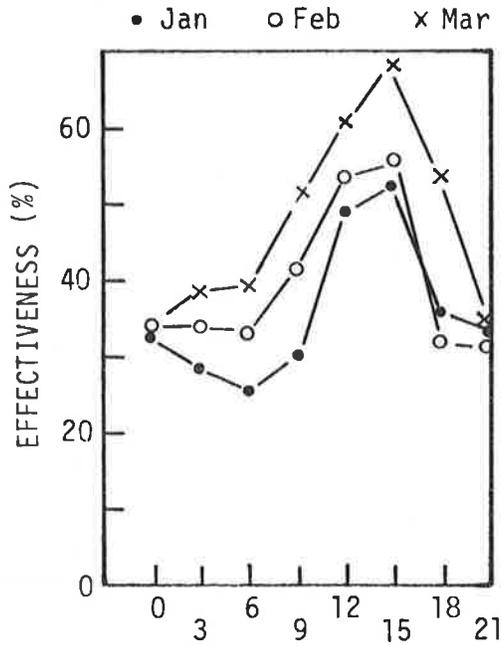


FIGURE 59. VAS EFFECTIVENESS FOR MSP RUNWAY 11/29 (CONCLUDED)

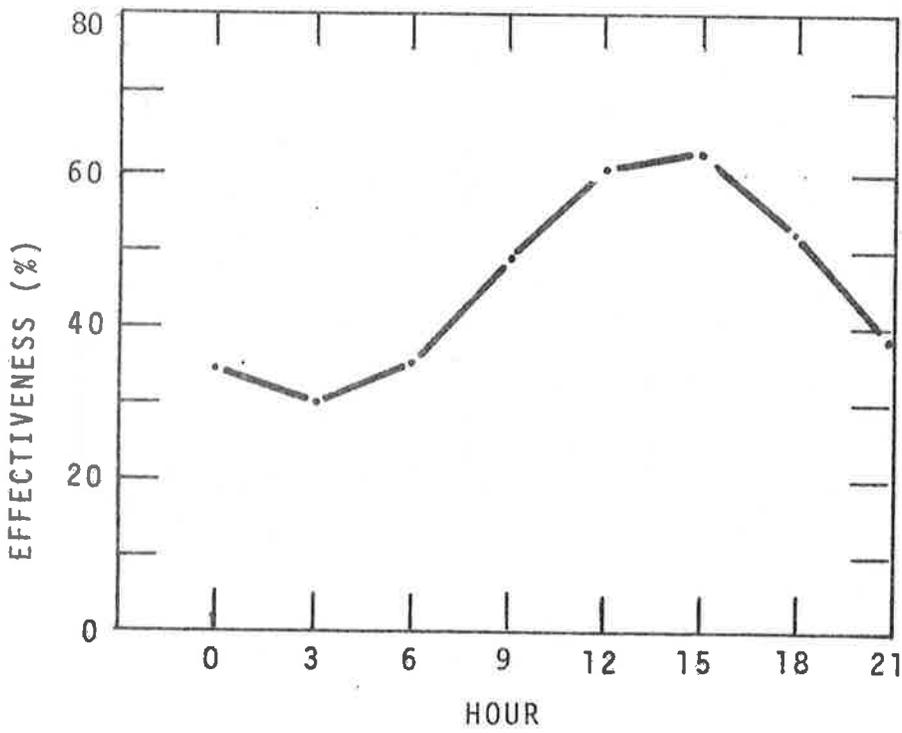
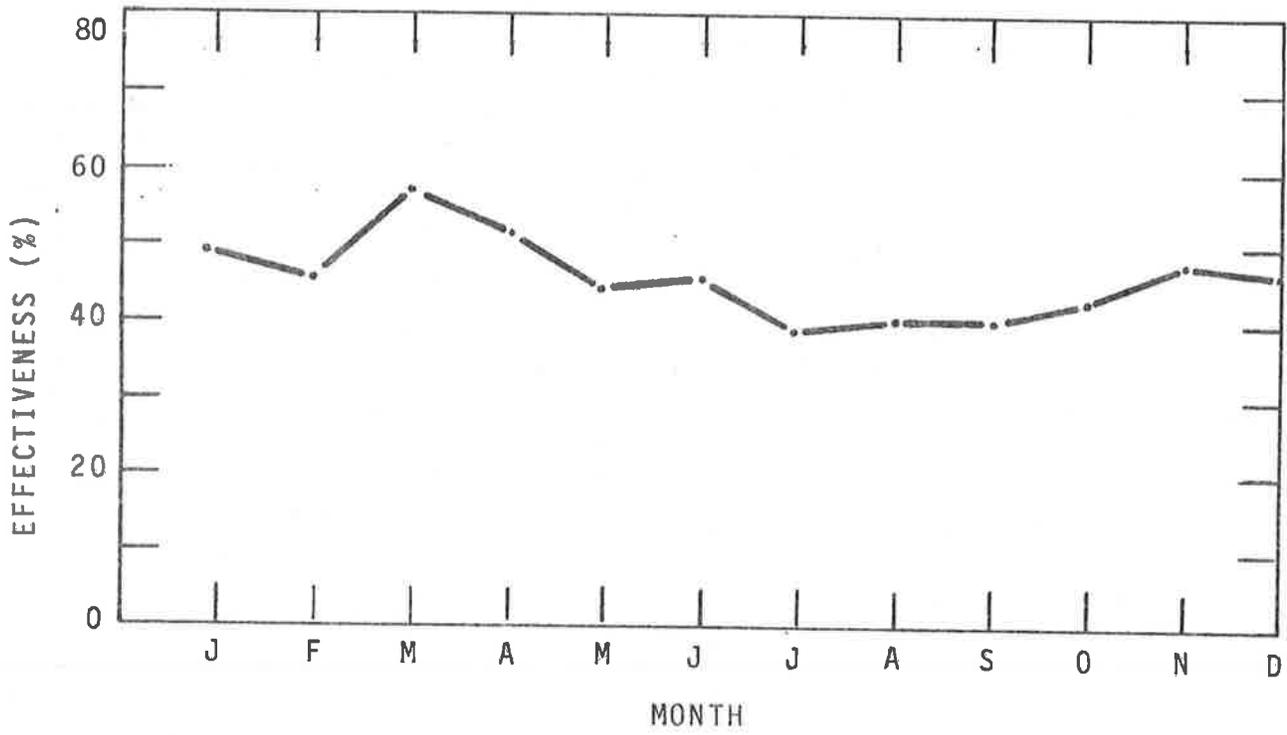


FIGURE 60. VAS EFFECTIVENESS FOR MSP RUNWAY 4/22

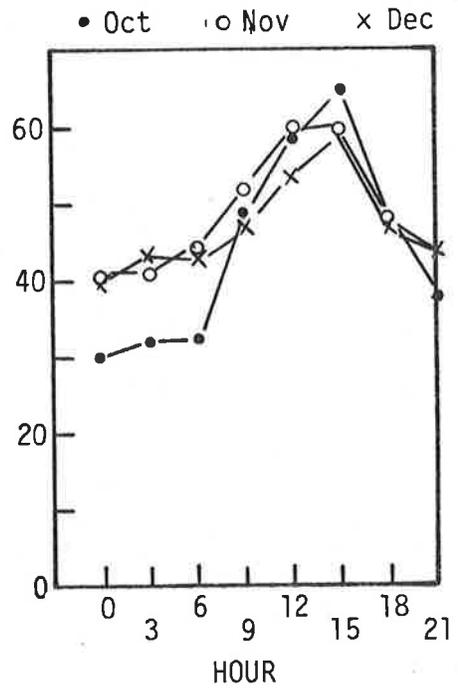
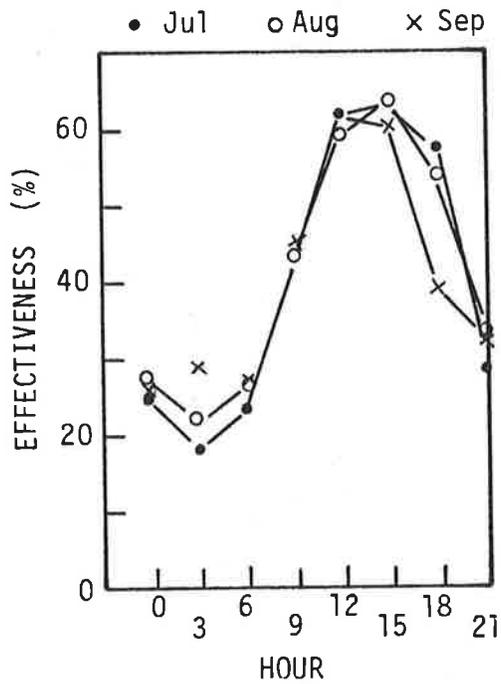
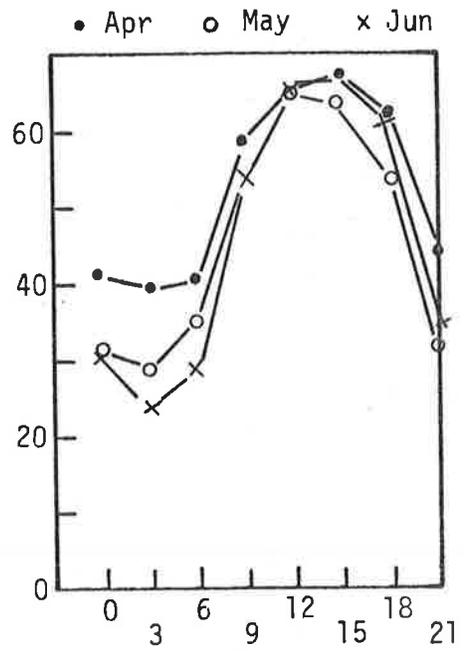
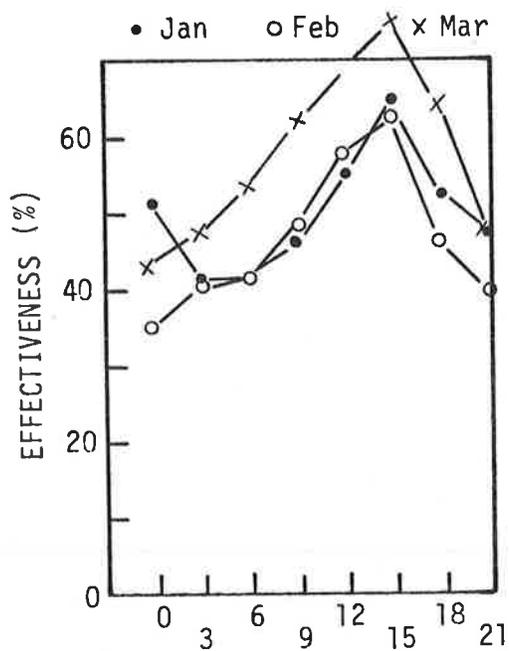


FIGURE 61. VAS EFFECTIVENESS FOR MSP RUNWAY 4/22 (CONCLUDED)

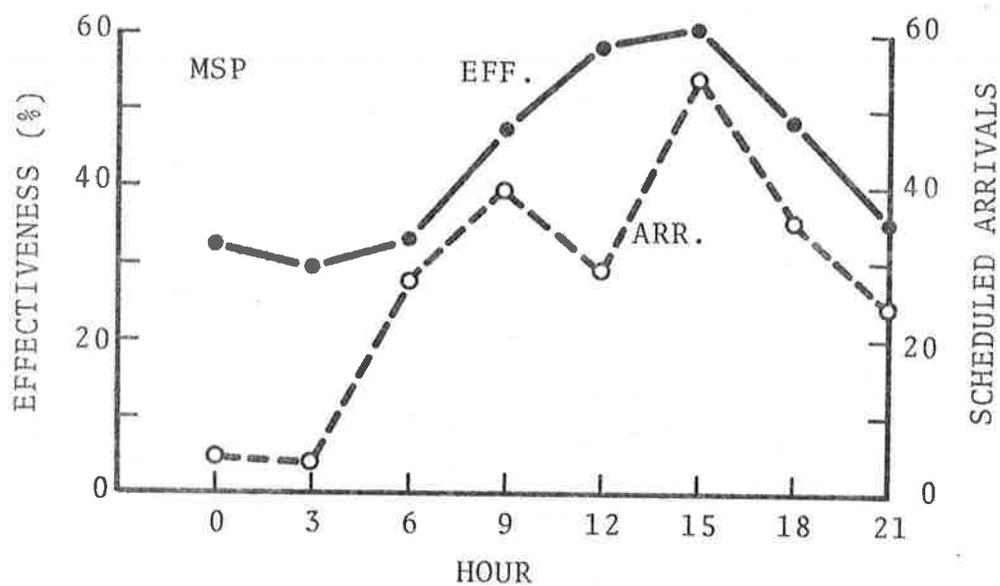


FIGURE 62. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR MSP

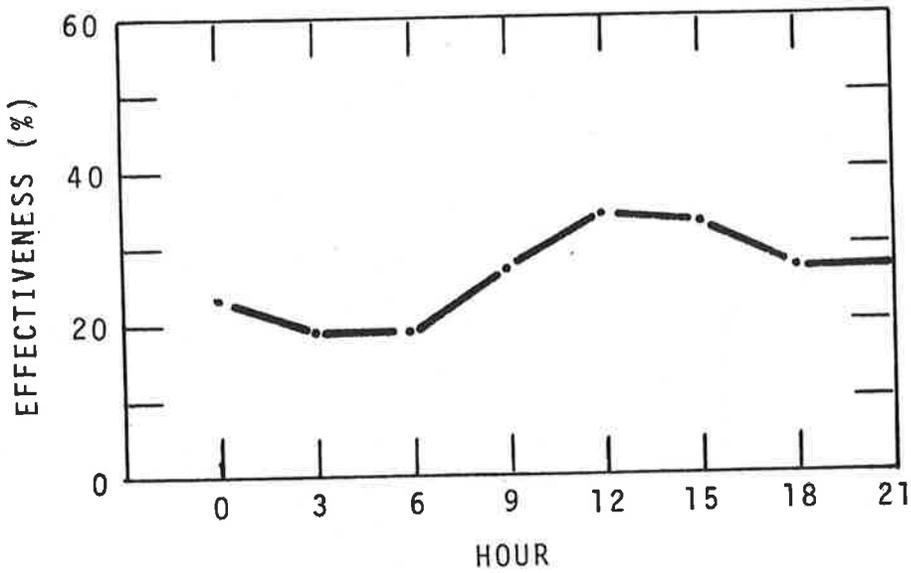
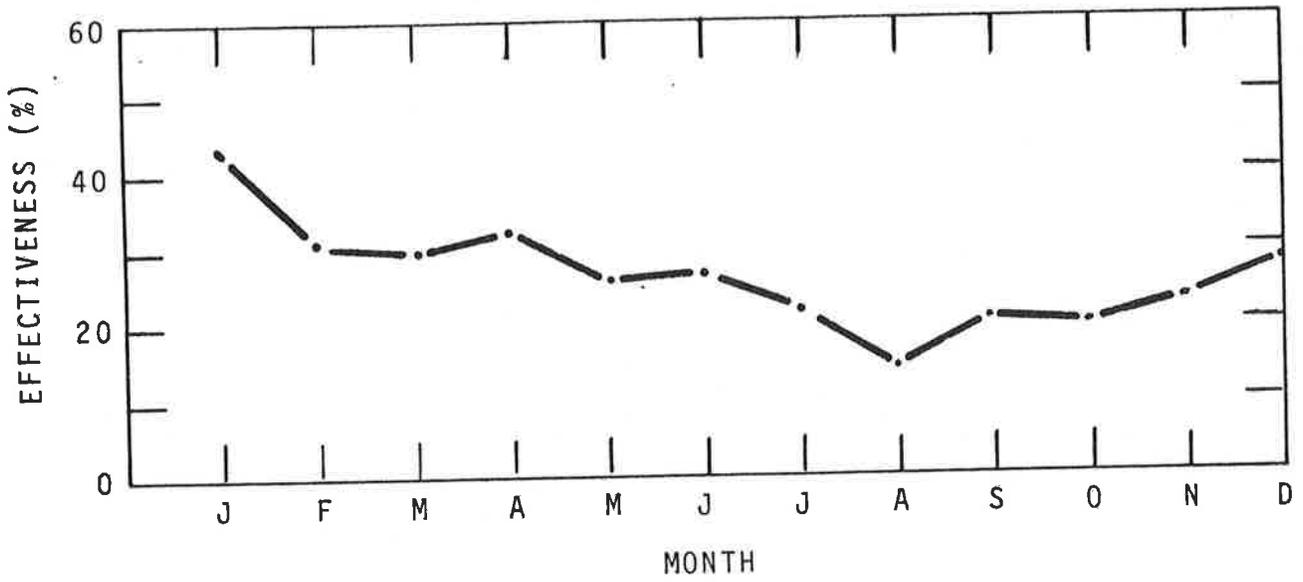


FIGURE 63. VAS EFFECTIVENESS FOR SEA RUNWAY 16/34

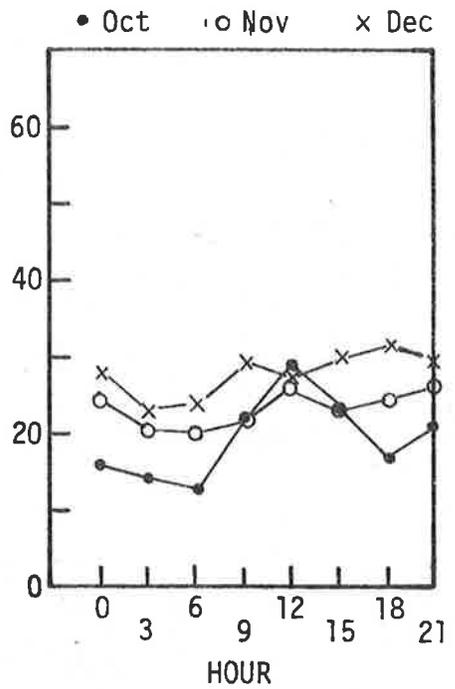
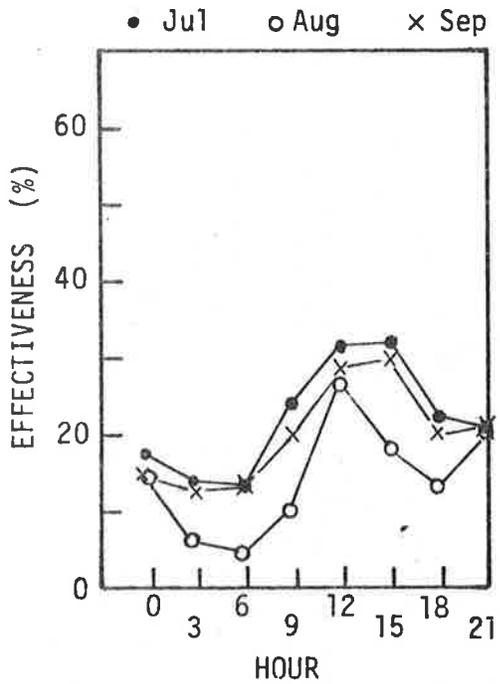
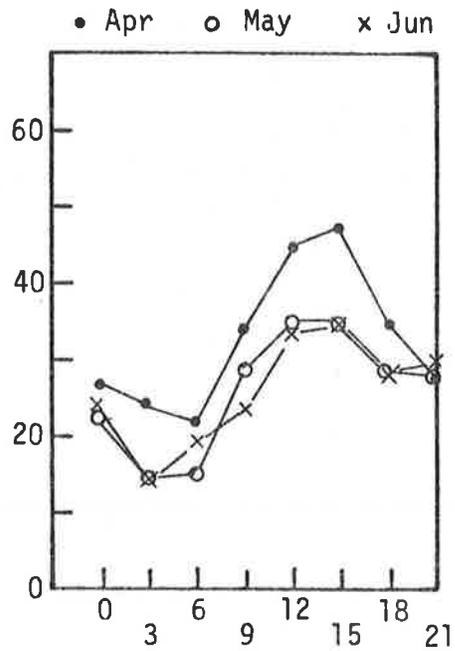
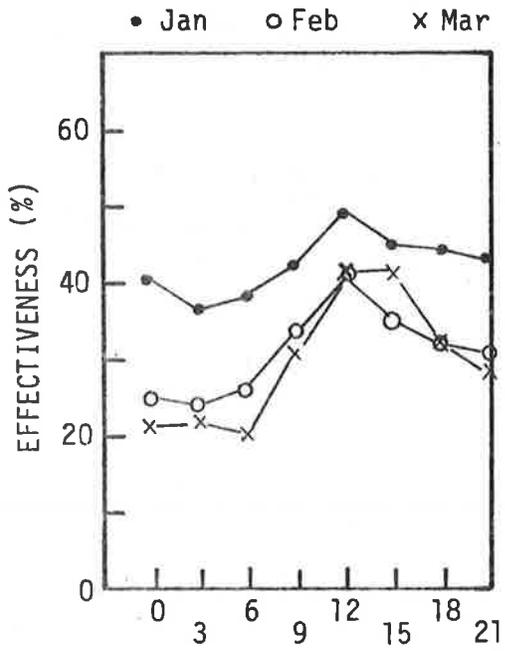


FIGURE 64. VAS EFFECTIVENESS FOR SEA RUNWAY 16/34 (CONCLUDED)

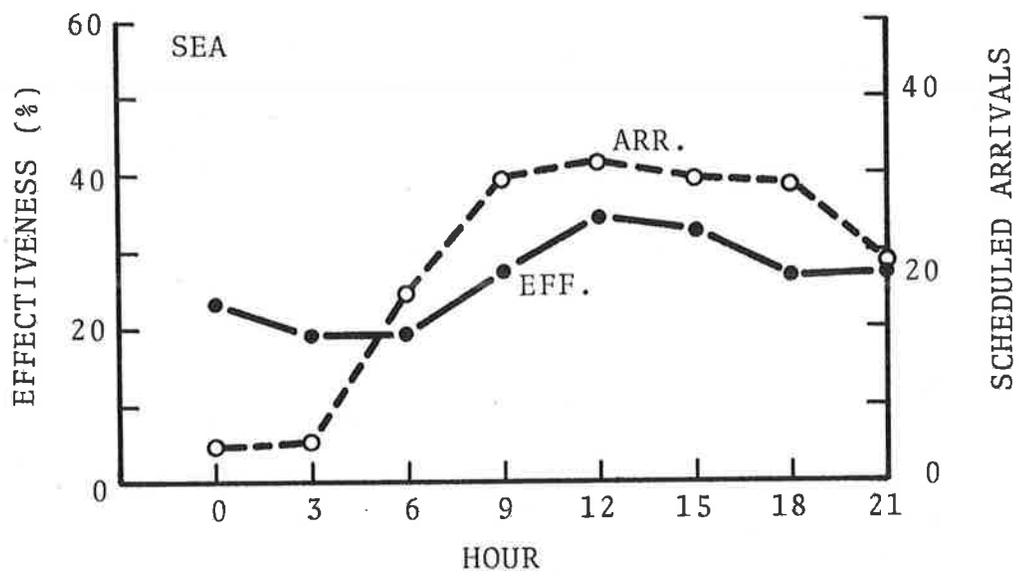


FIGURE 65. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR SEA

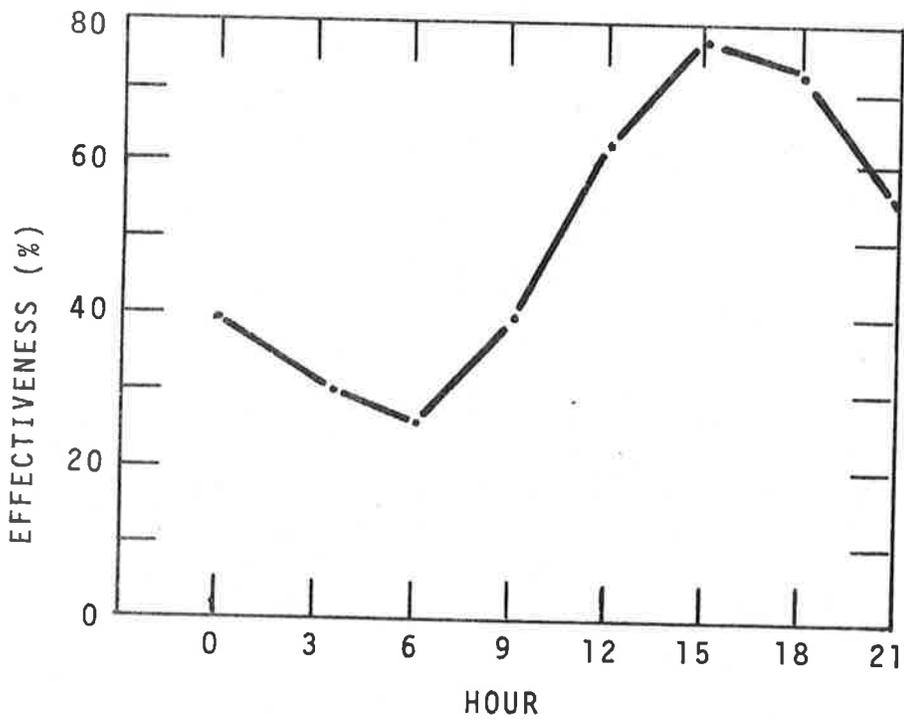
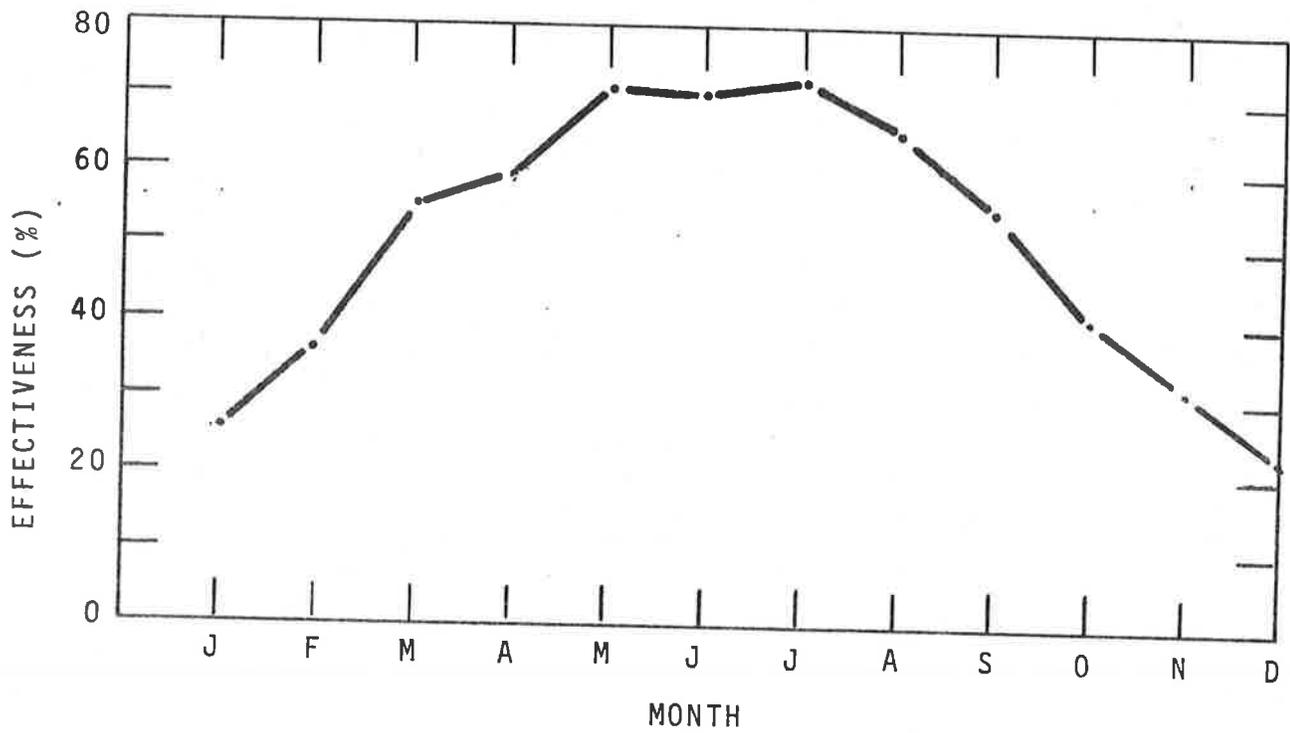


FIGURE 66. VAS EFFECTIVENESS FOR SFO RUNWAY 1/19

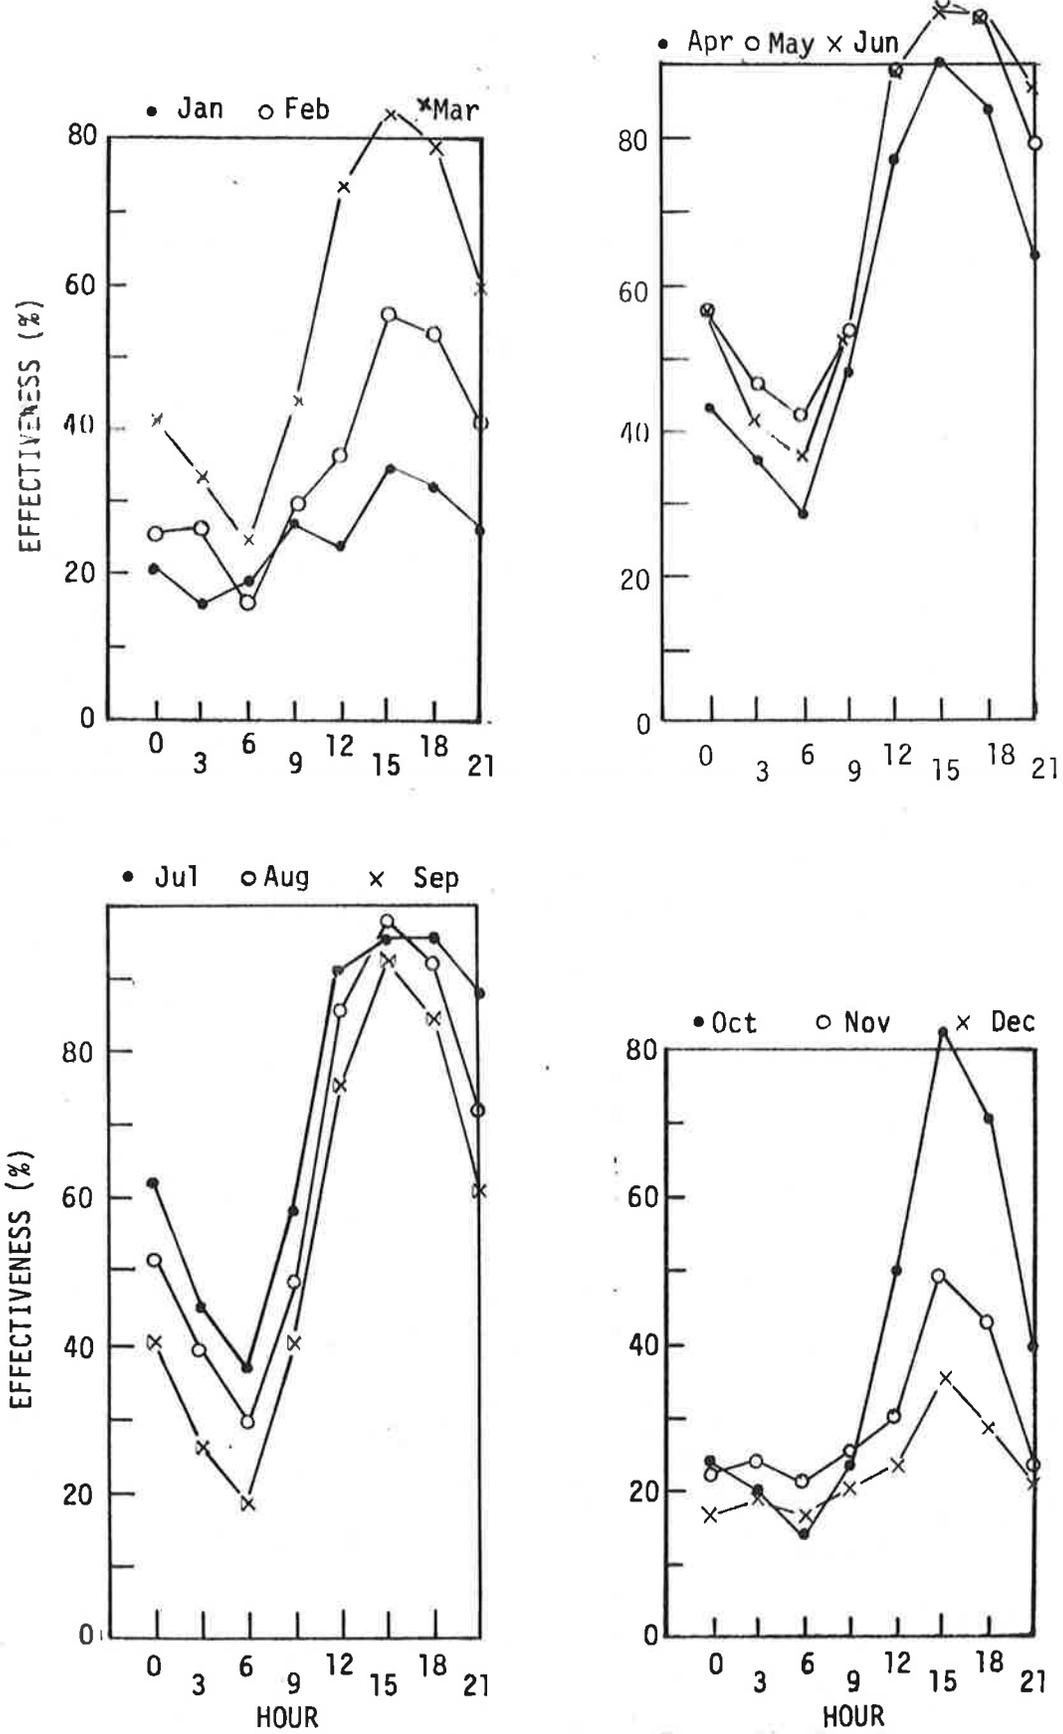


FIGURE 67. VAS EFFECTIVENESS FOR SFO RUNWAY 1/19 (CONCLUDED)

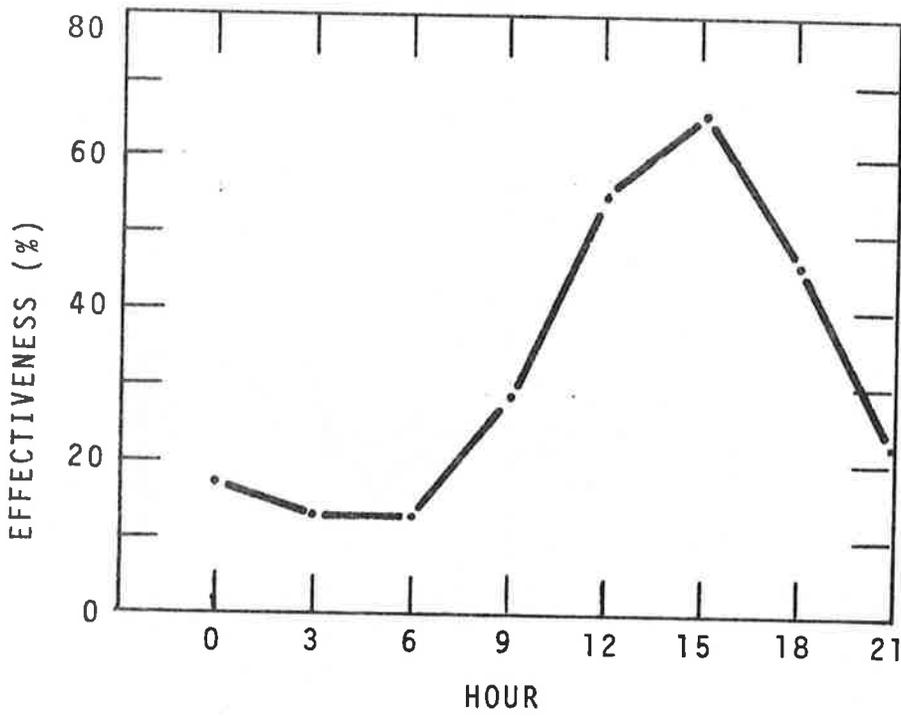
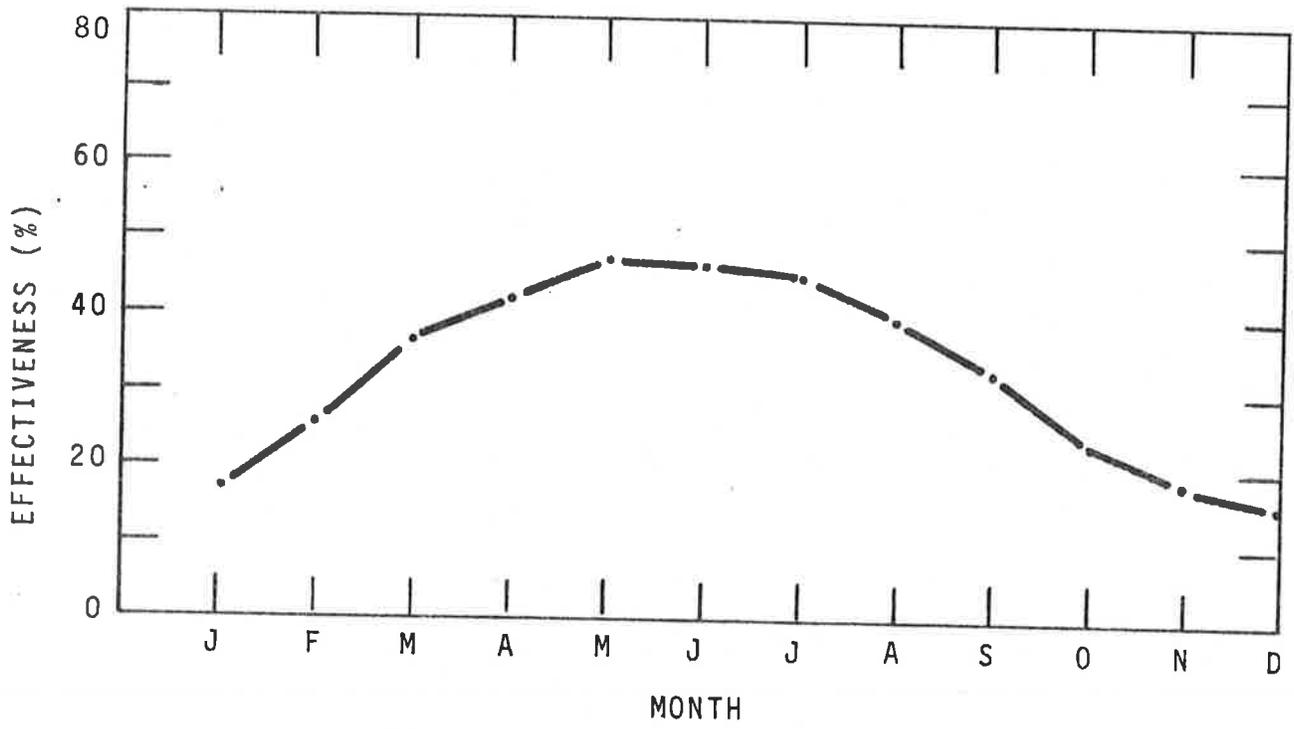


FIGURE 68. VAS EFFECTIVENESS FOR SFO RUNWAY 10/28

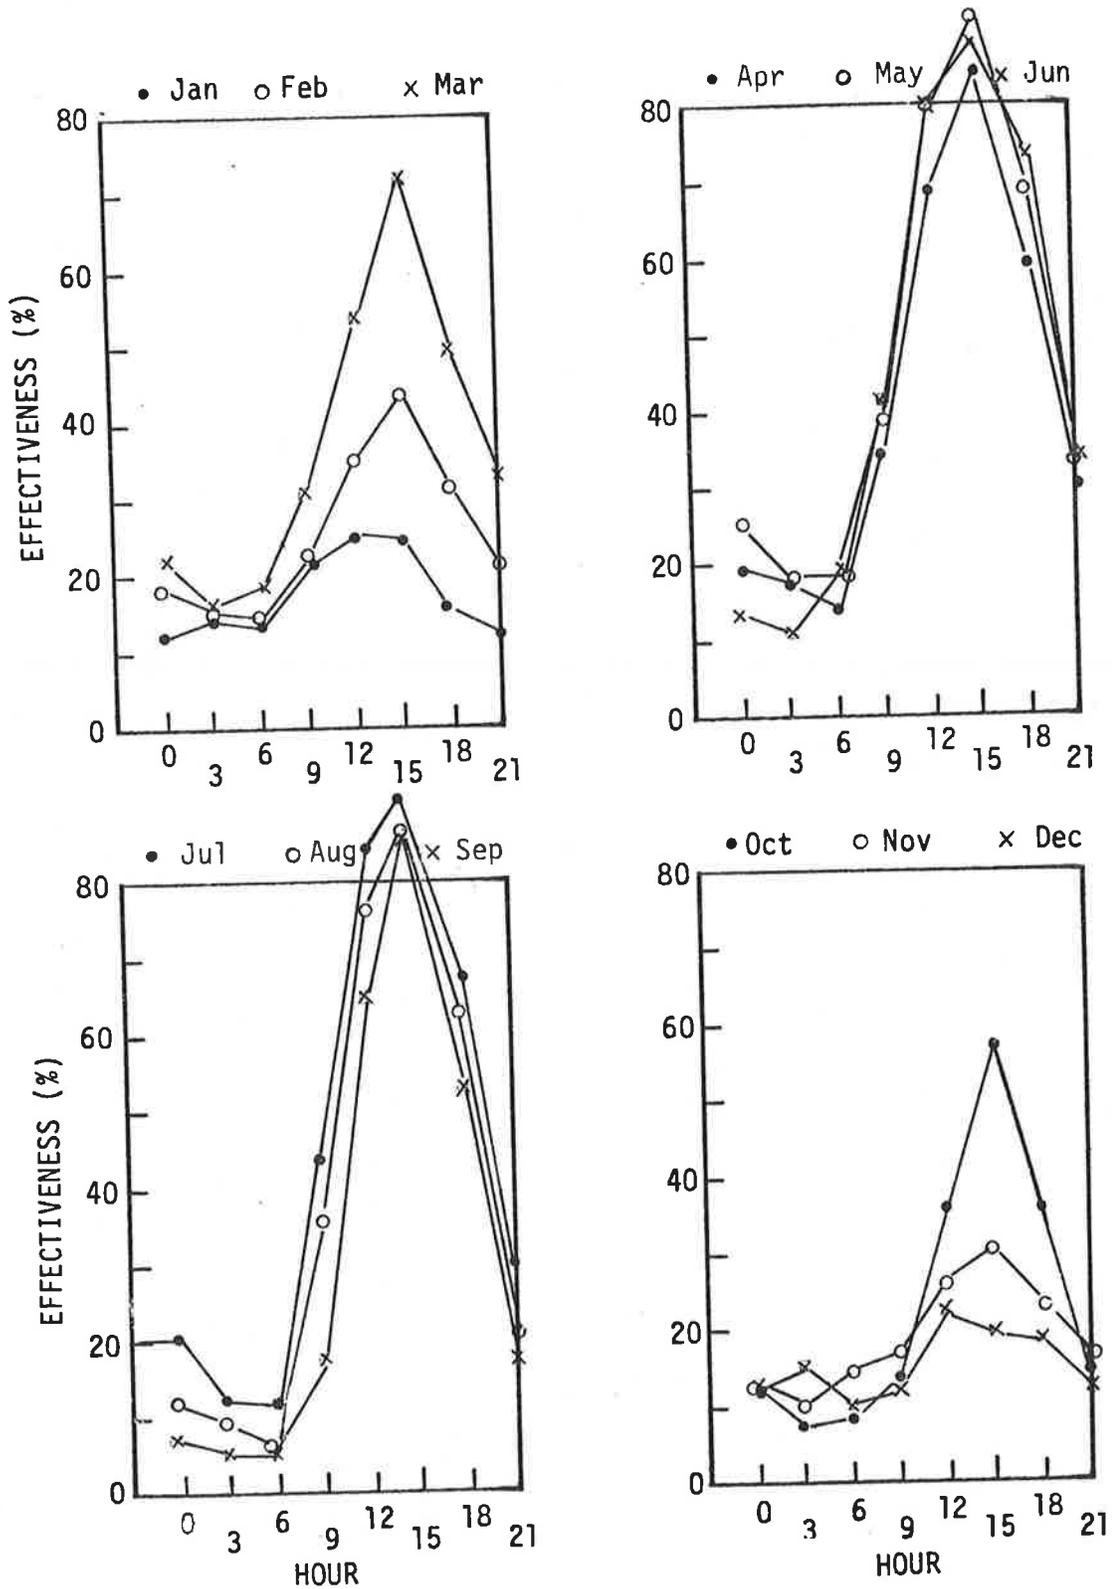


FIGURE 69. VAS EFFECTIVENESS FOR SFO RUNWAY 10/28 (CONCLUDED)

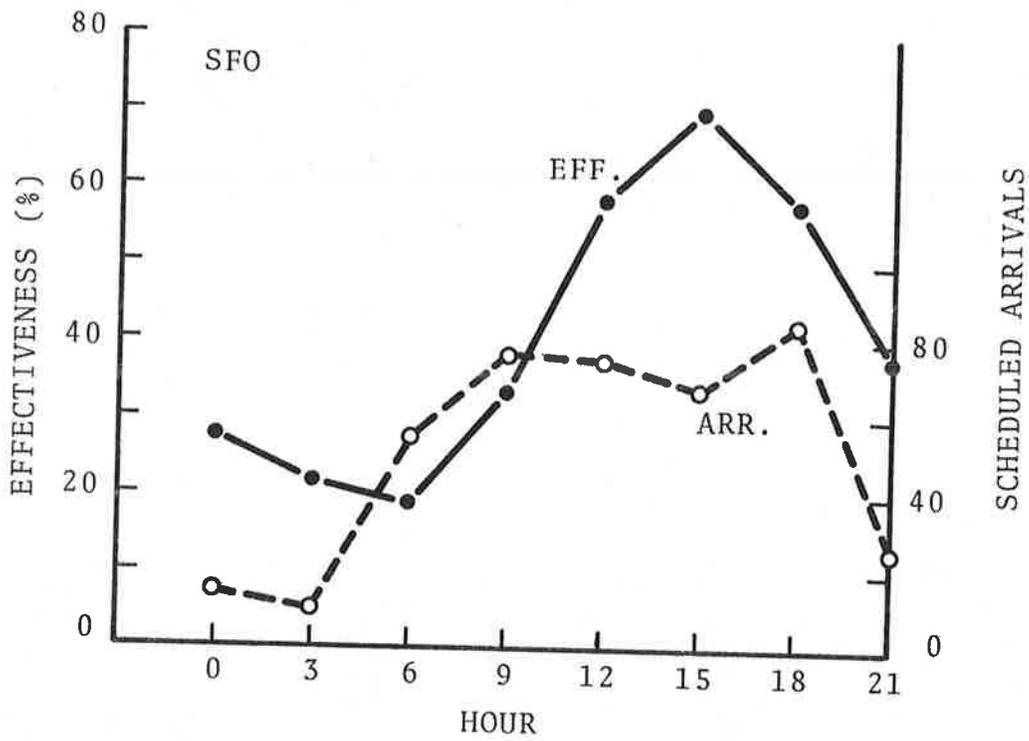


FIGURE 70. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR SFO

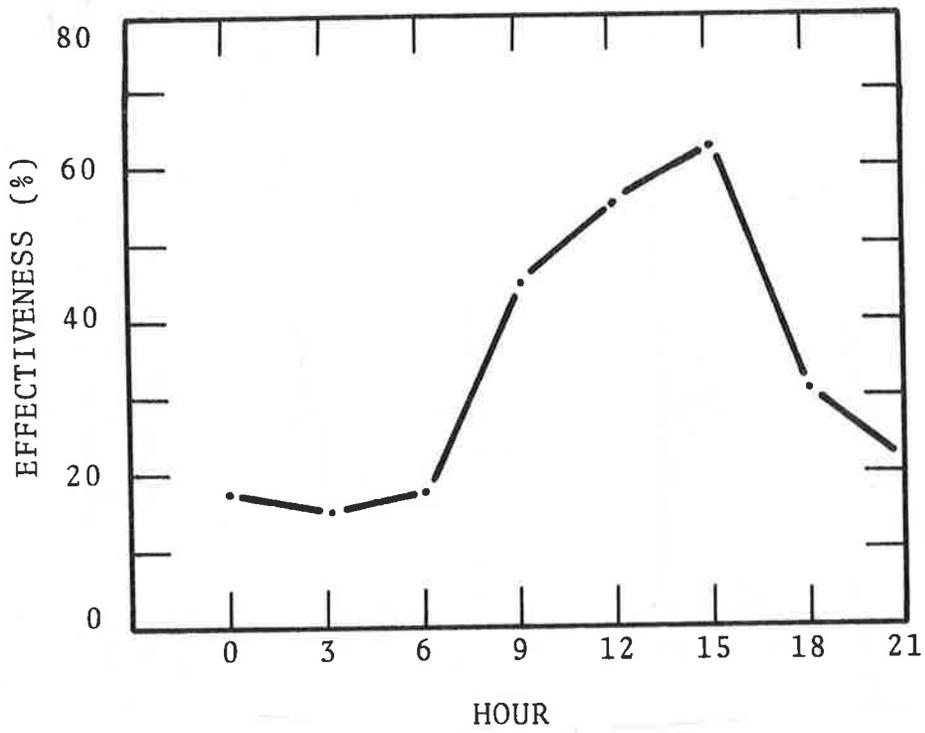
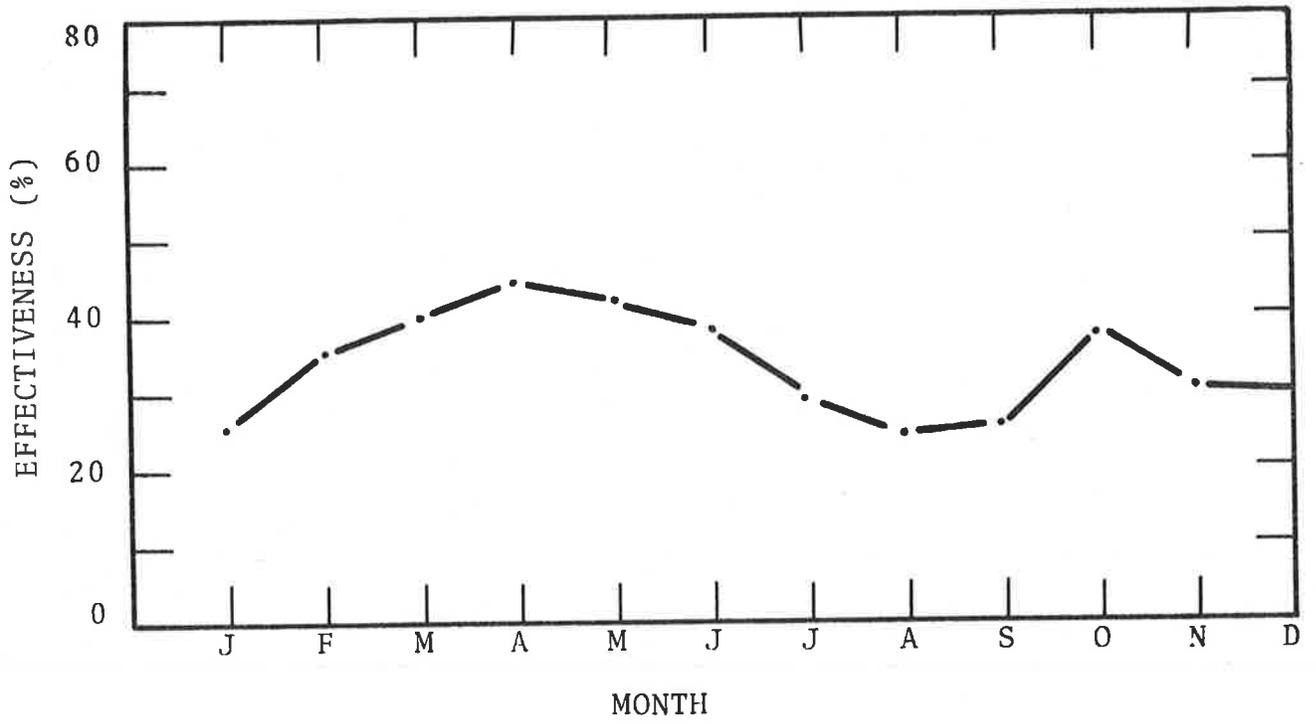


FIGURE 71. VAS EFFECTIVENESS FOR TPA RUNWAY 18/36

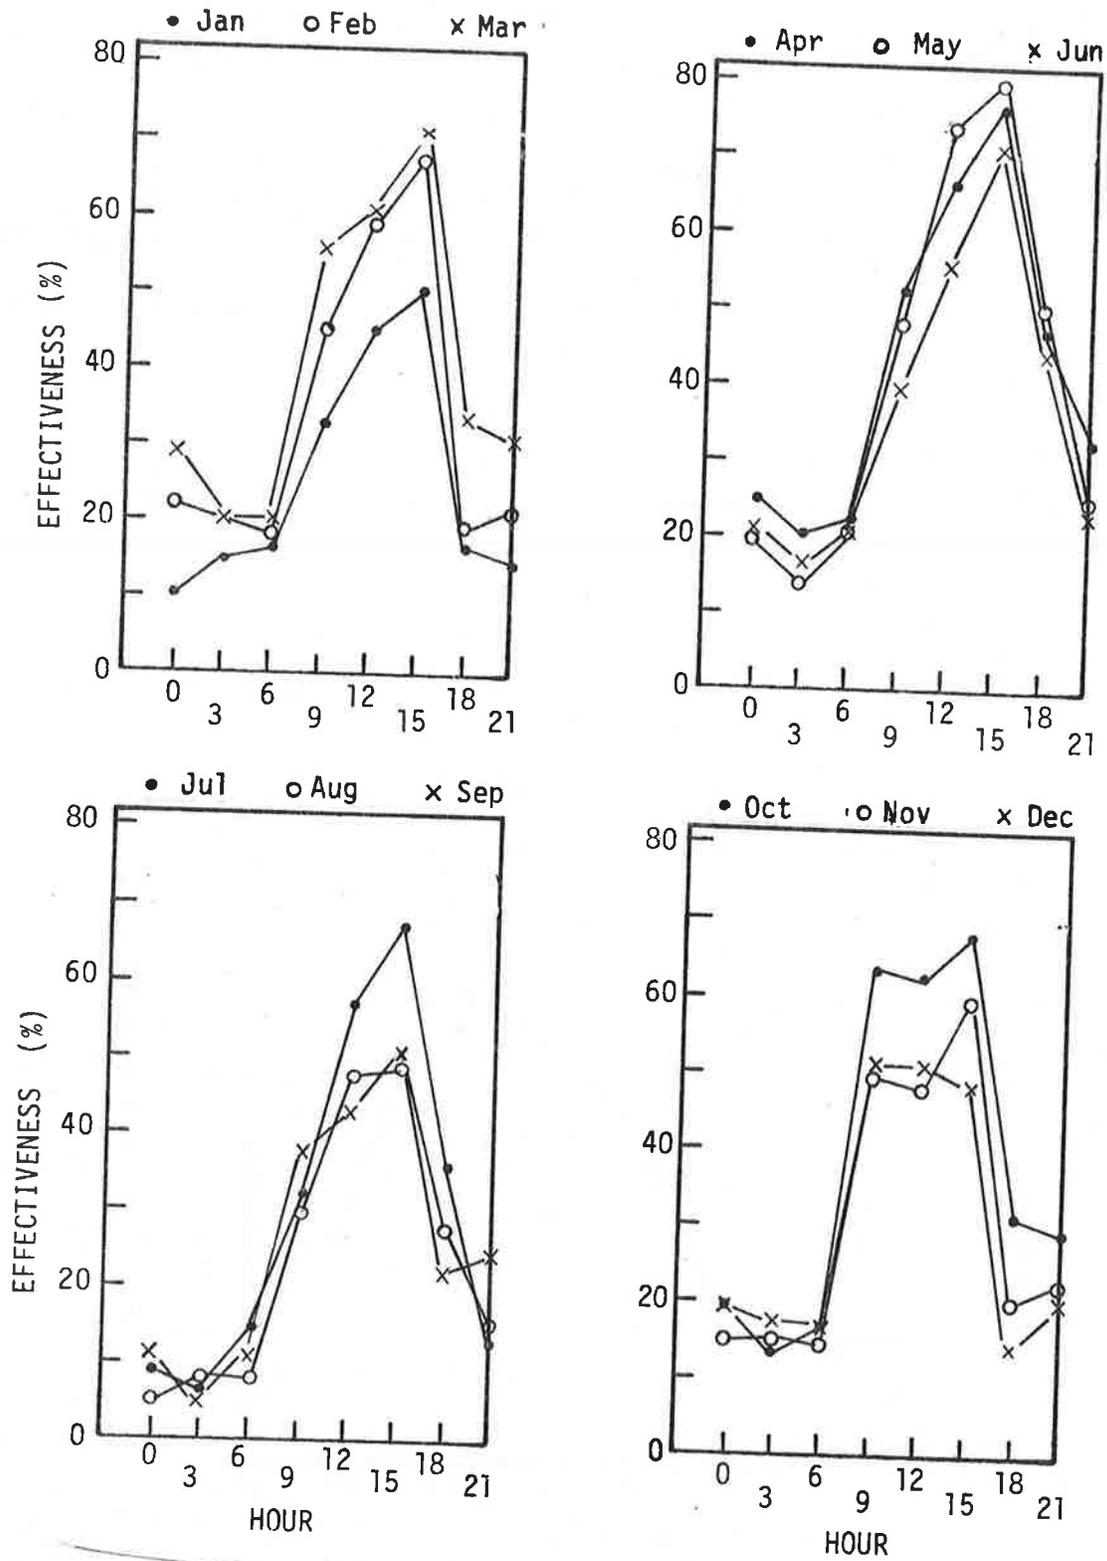


FIGURE 72. VAS EFFECTIVENESS FOR TPA RUNWAY 18/36 (CONCLUDED)

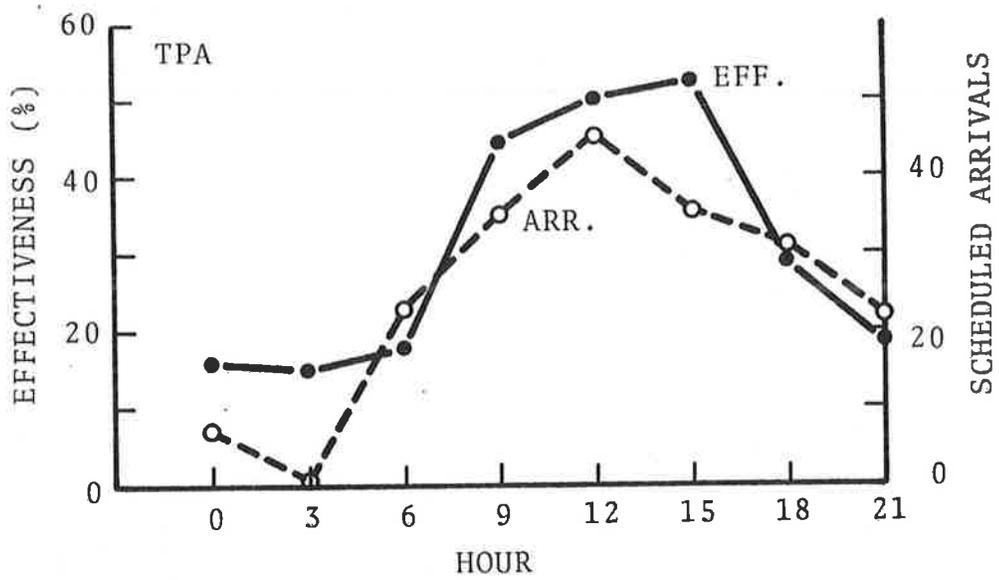


FIGURE 73. VAS EFFECTIVENESS AND ARRIVAL DEMAND VERSUS HOUR FOR TPA

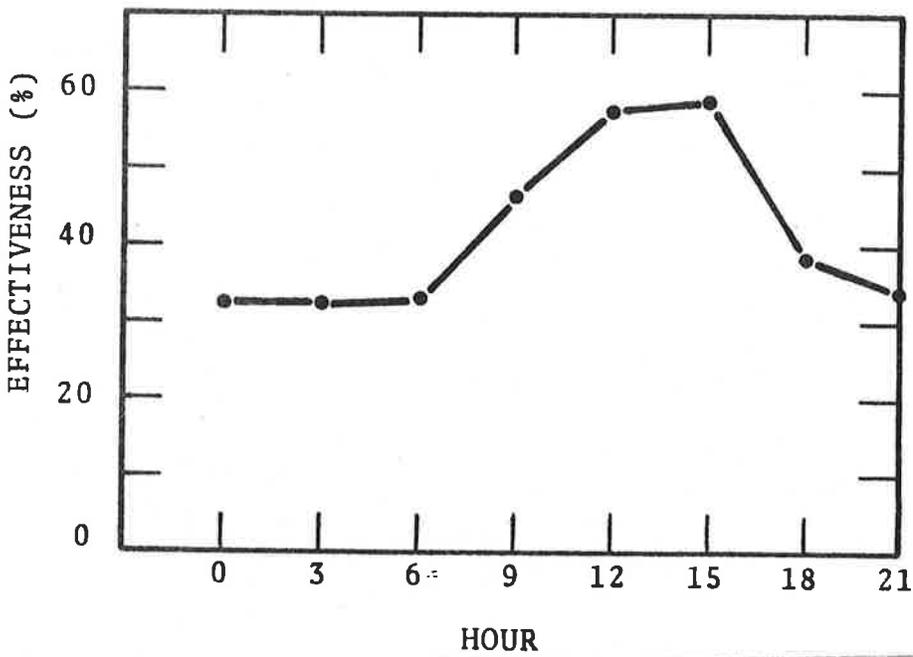
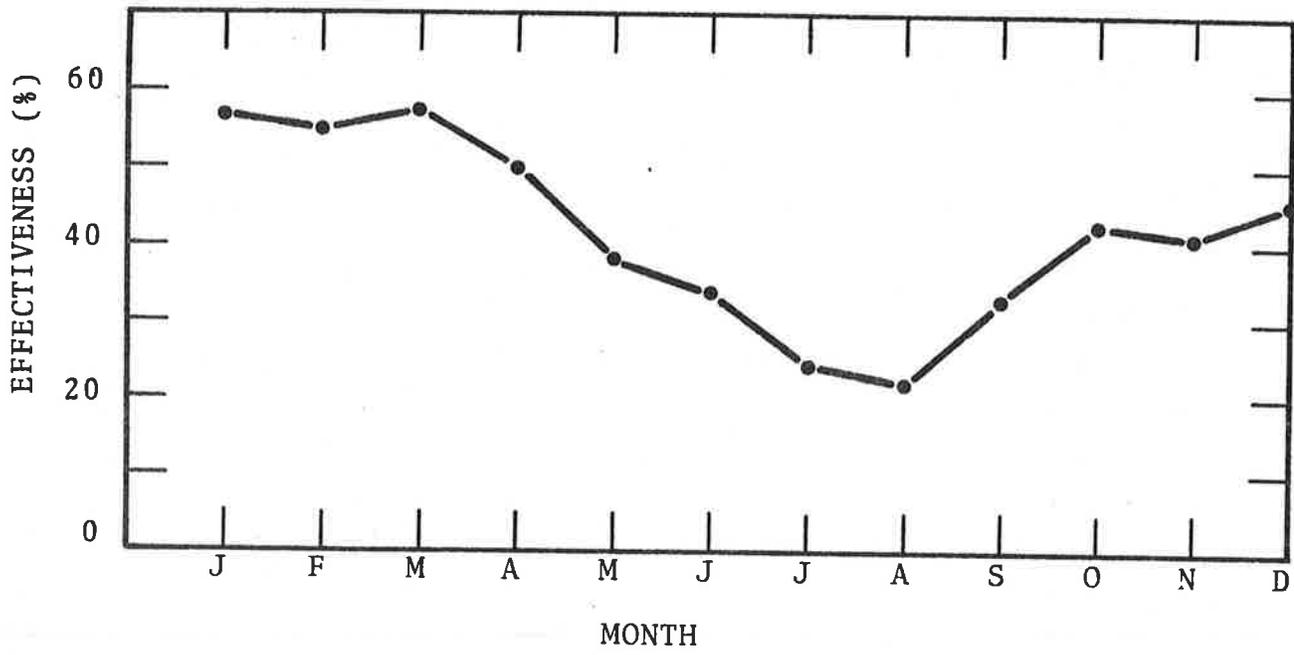


FIGURE 74. VAS EFFECTIVENESS FOR CLE RUNWAY 5/23

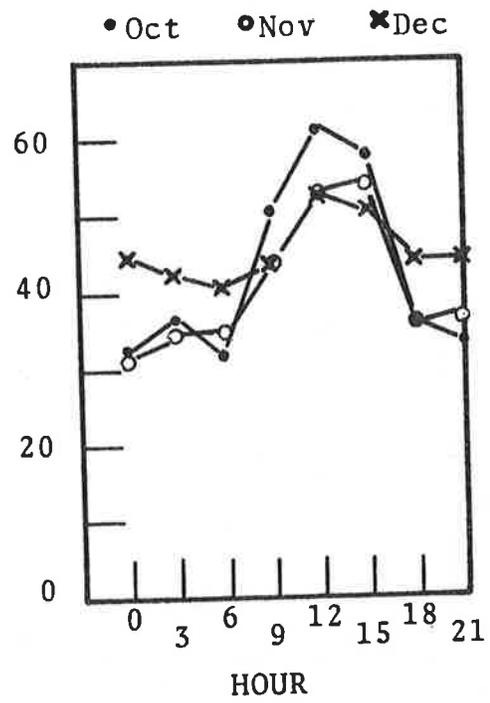
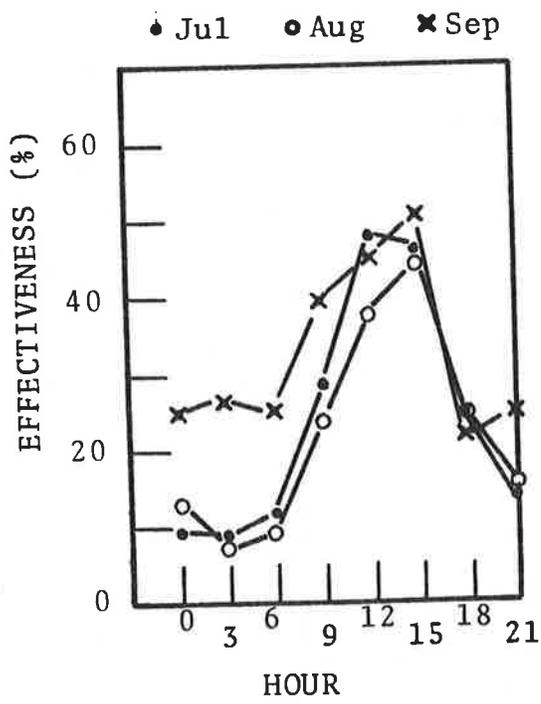
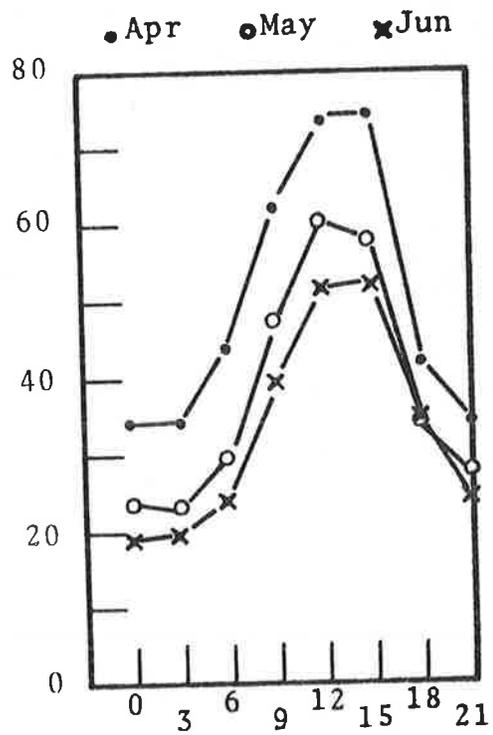
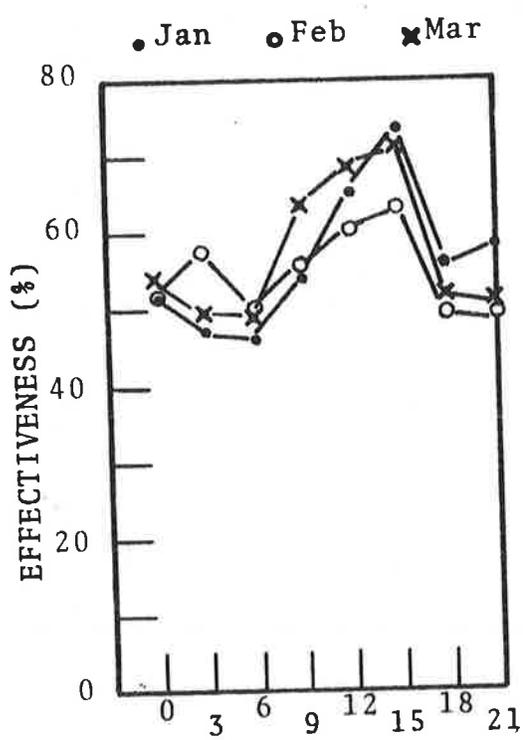


FIGURE 75. VAS EFFECTIVENESS FOR CLE RUNWAY 5/23 (CONCLUDED)

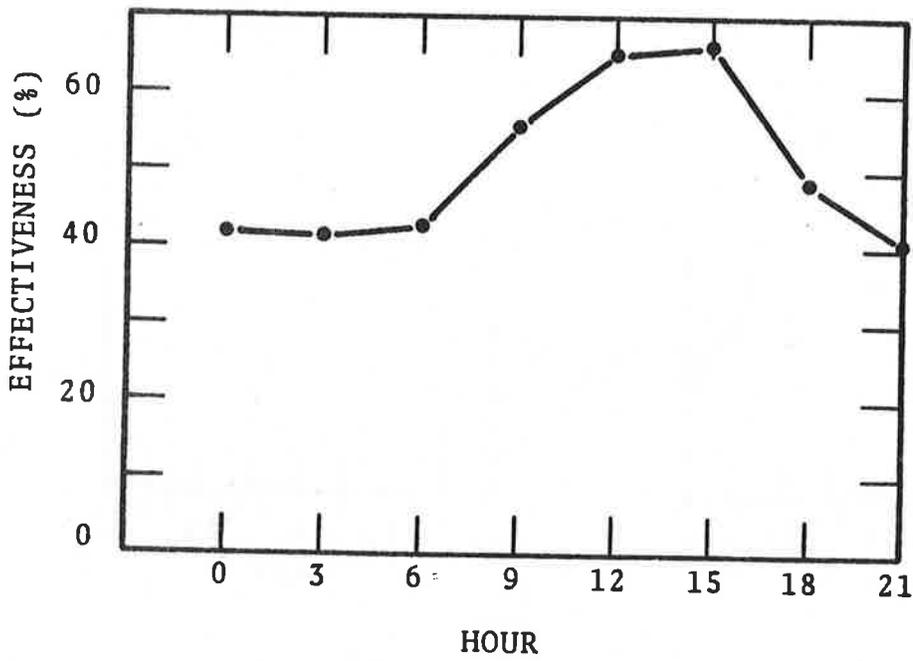
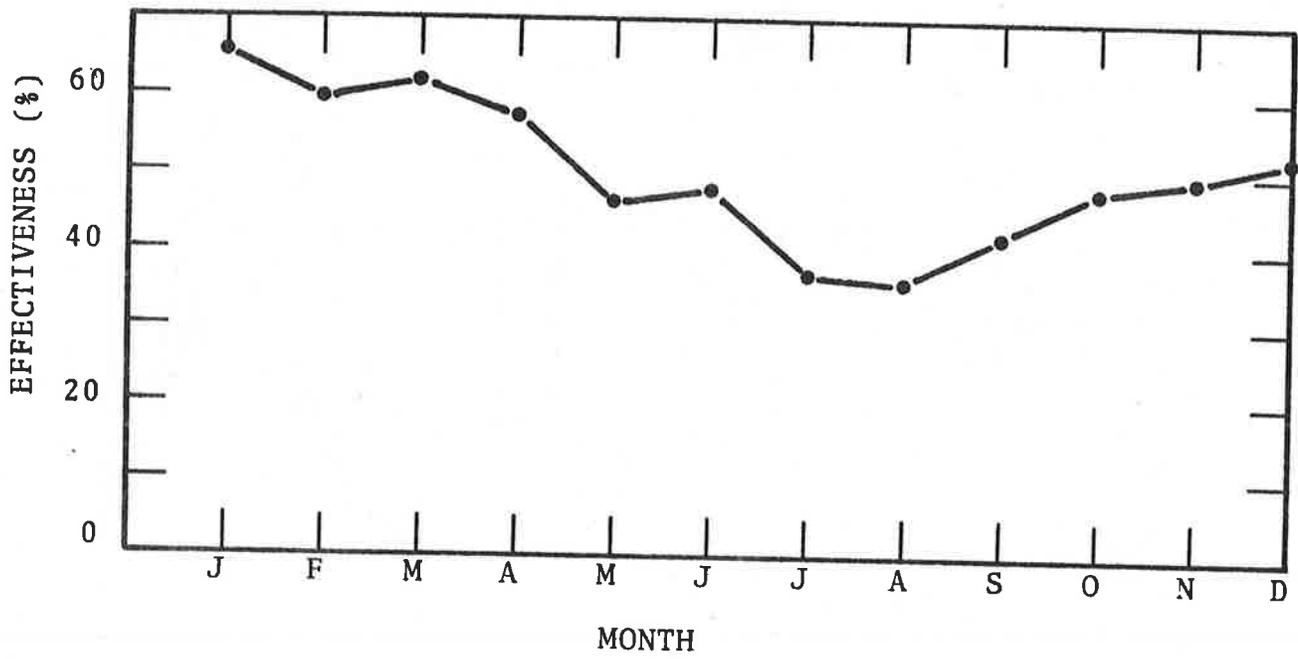


FIGURE 76. VAS EFFECTIVENESS FOR CLE RUNWAY 10/28

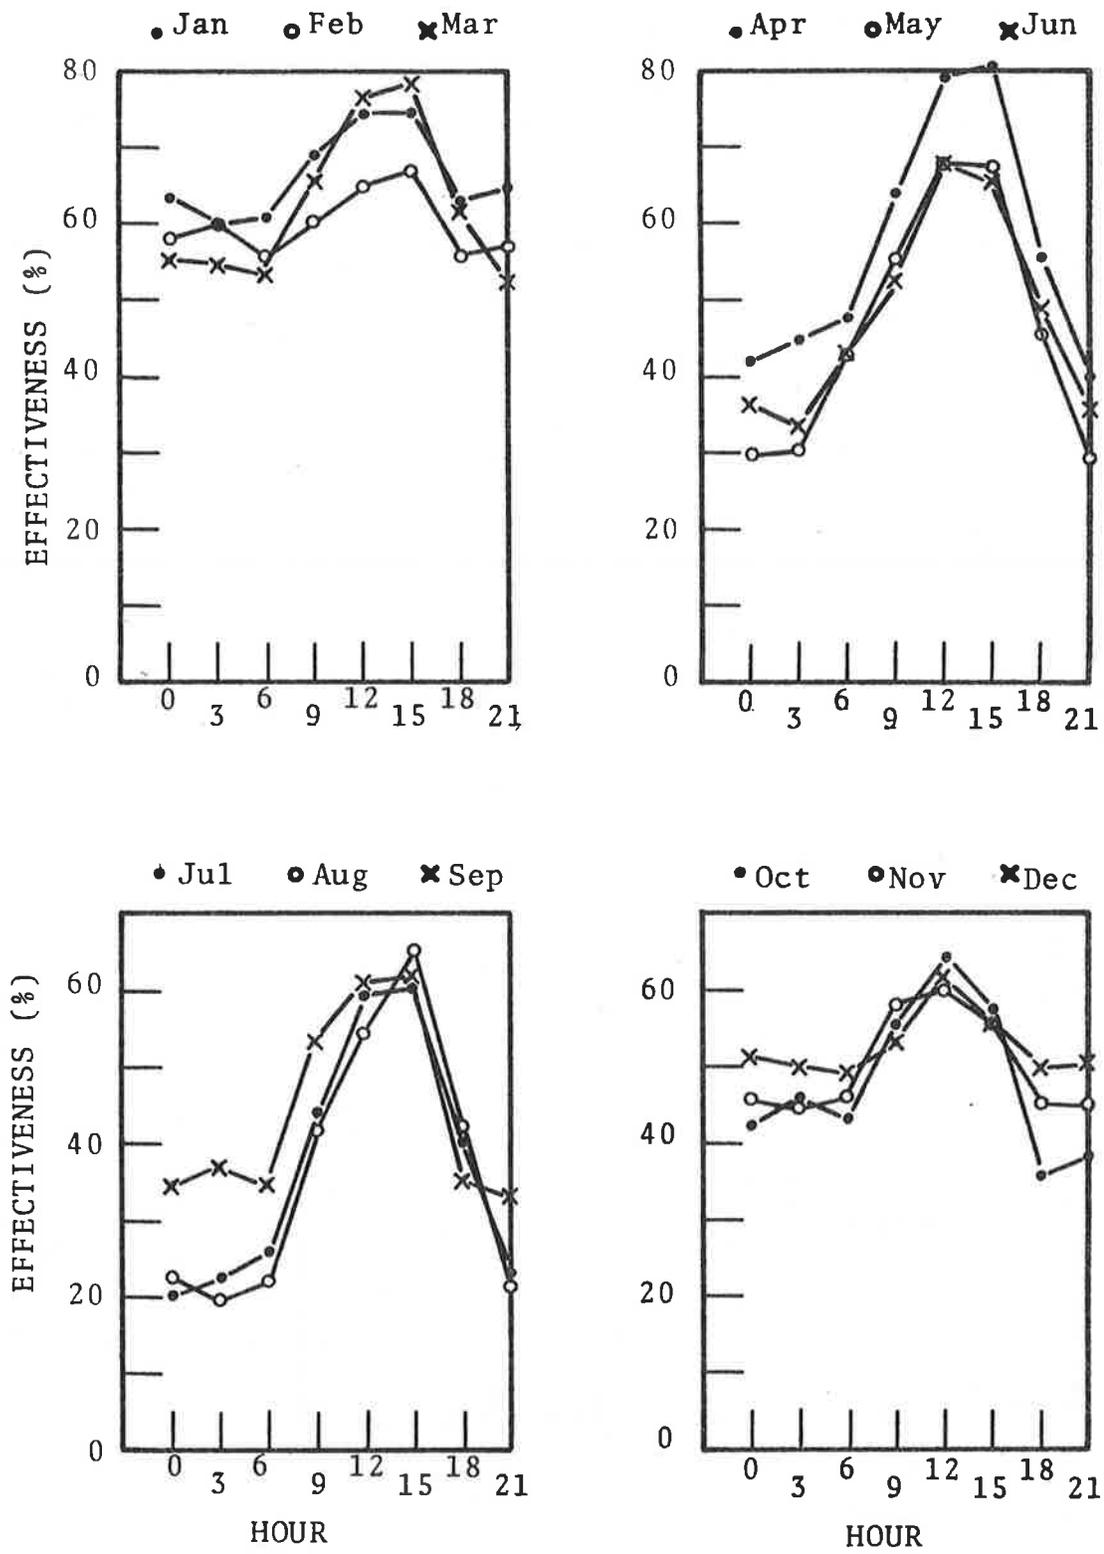


FIGURE 77. VAS EFFECTIVENESS FOR CLE RUNWAY 10/28 (CONCLUDED)

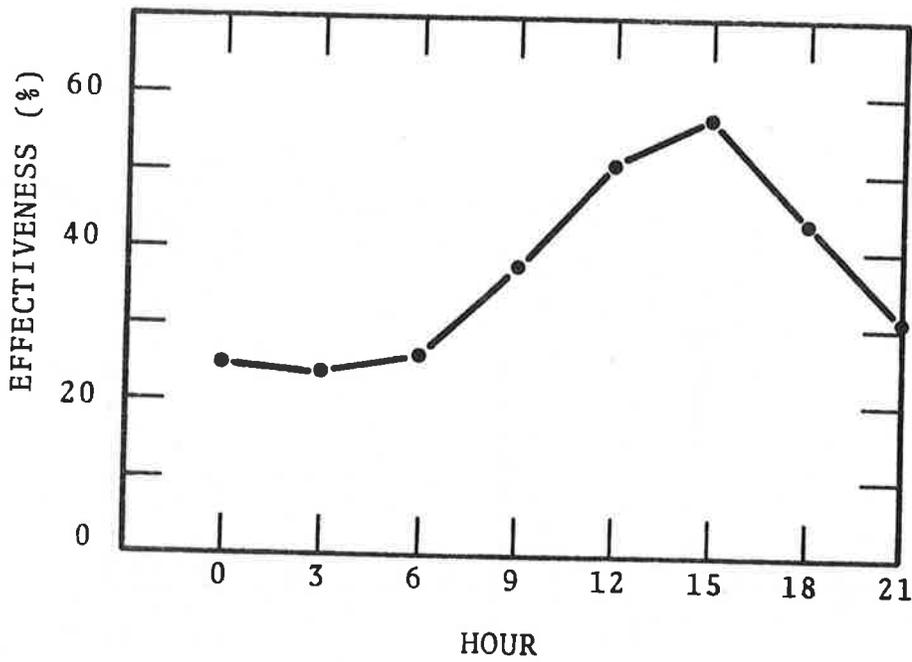
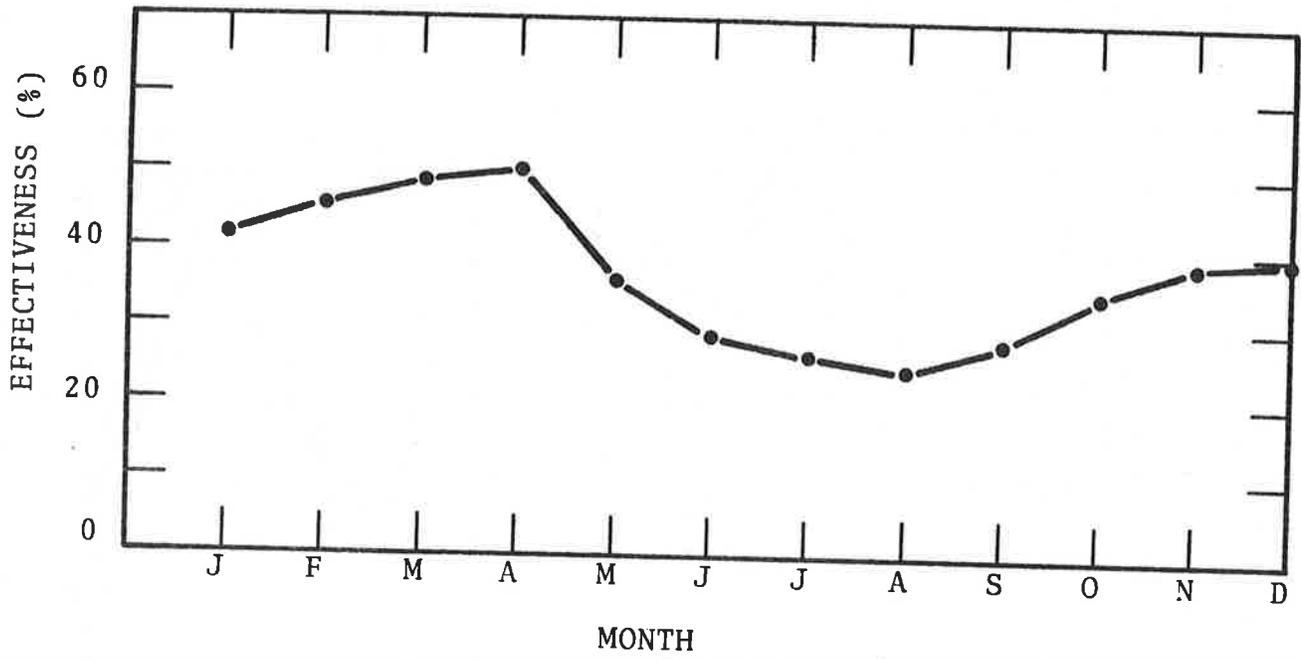


FIGURE 78. VAS EFFECTIVENESS FOR EWR RUNWAY 4/22

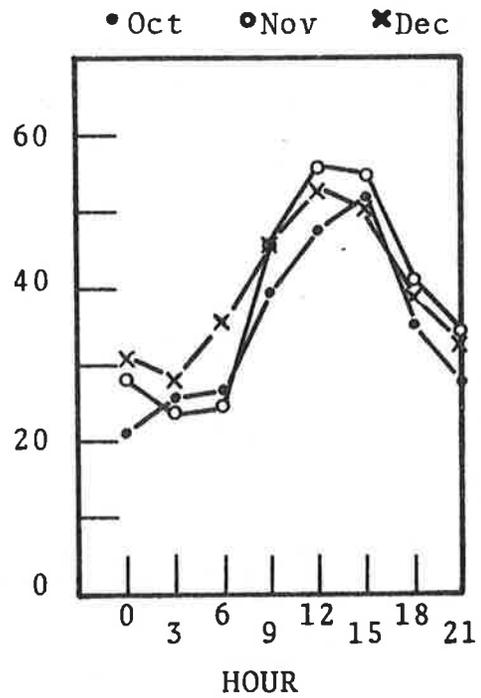
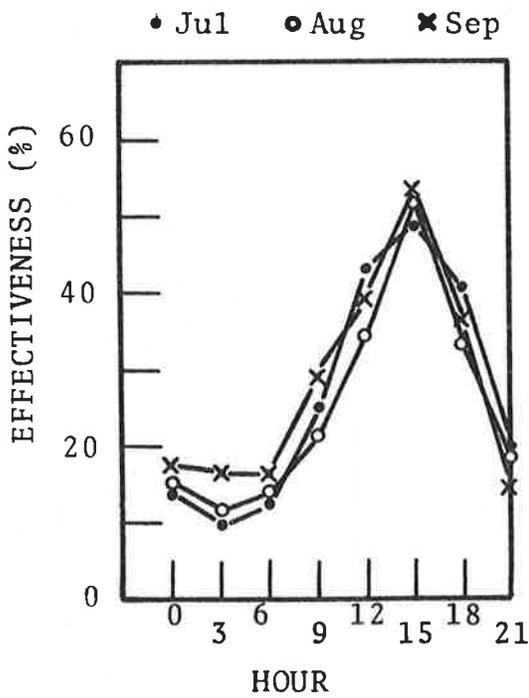
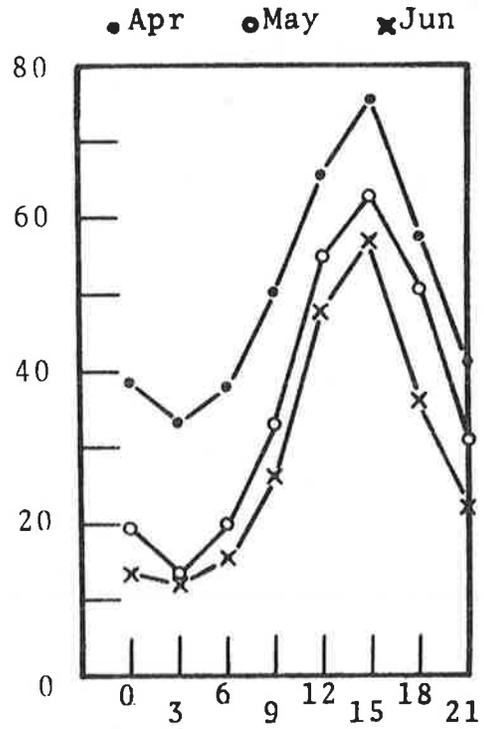
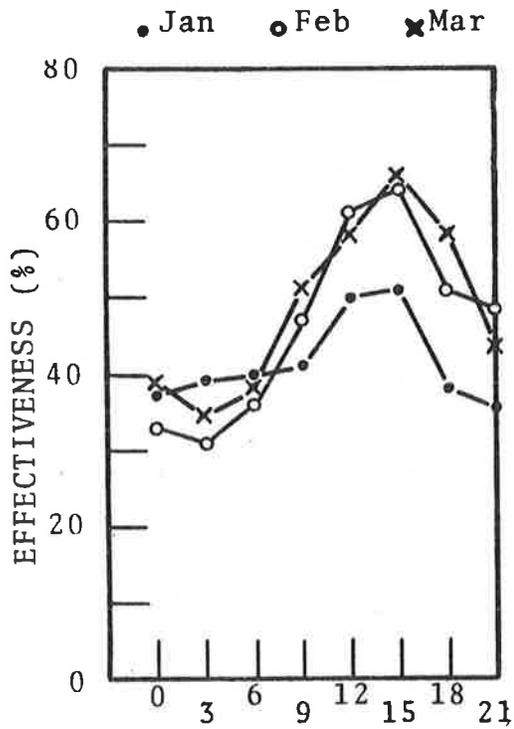


FIGURE 79. VAS EFFECTIVENESS FOR EWR RUNWAY 4/22 (CONCLUDED)

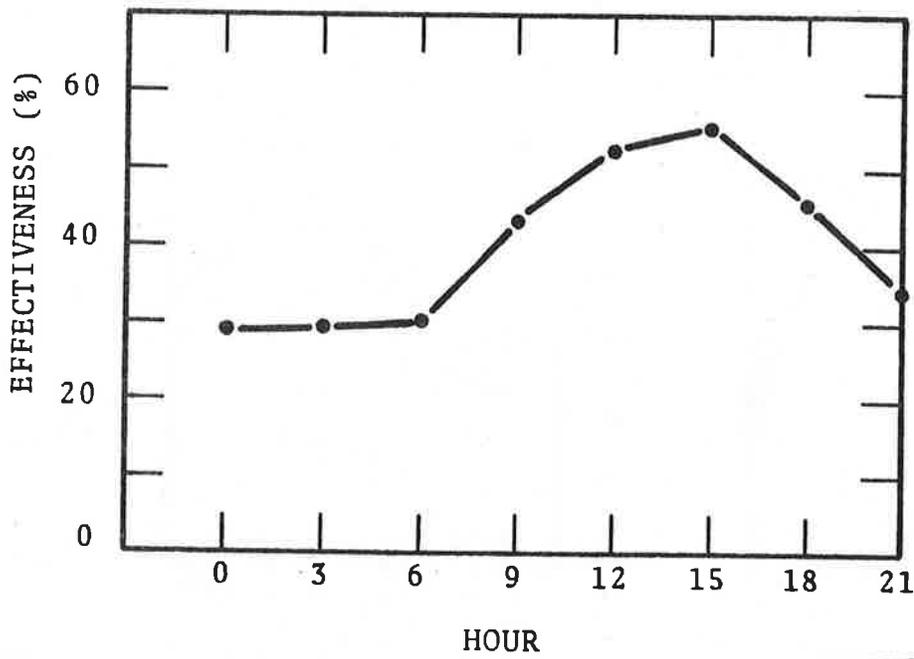
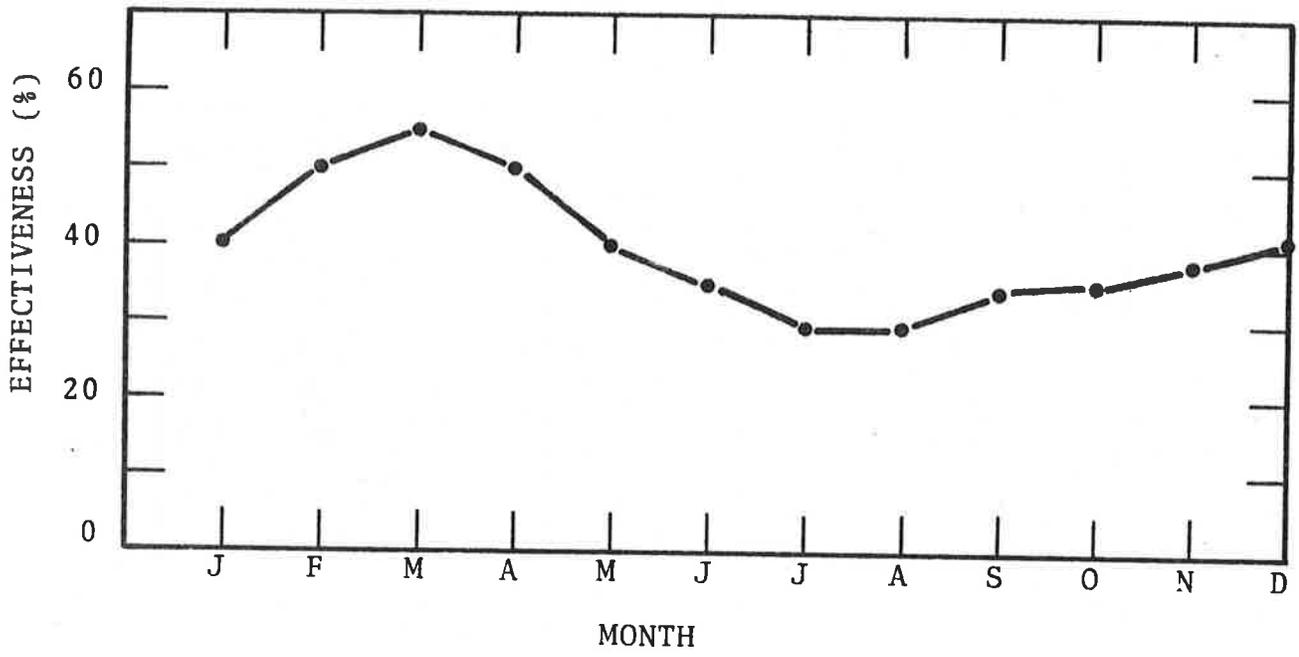


FIGURE 80. VAS EFFECTIVENESS FOR PHL RUNWAY 9/27

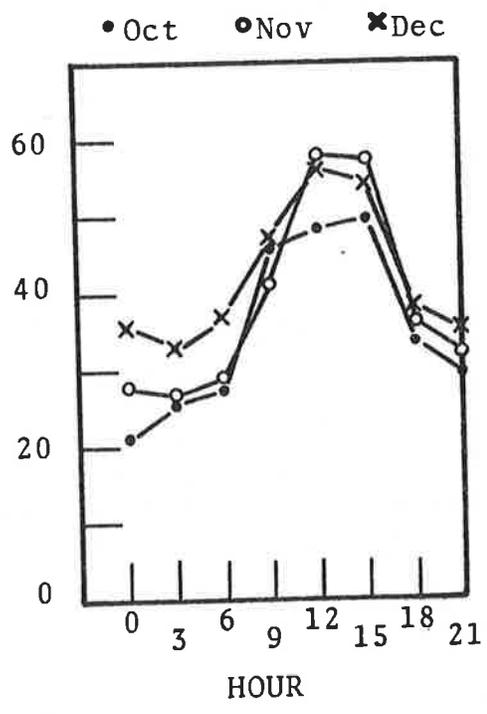
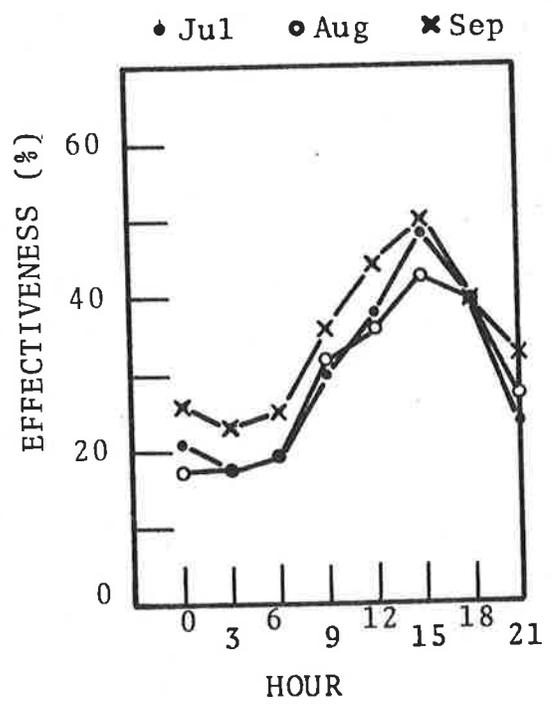
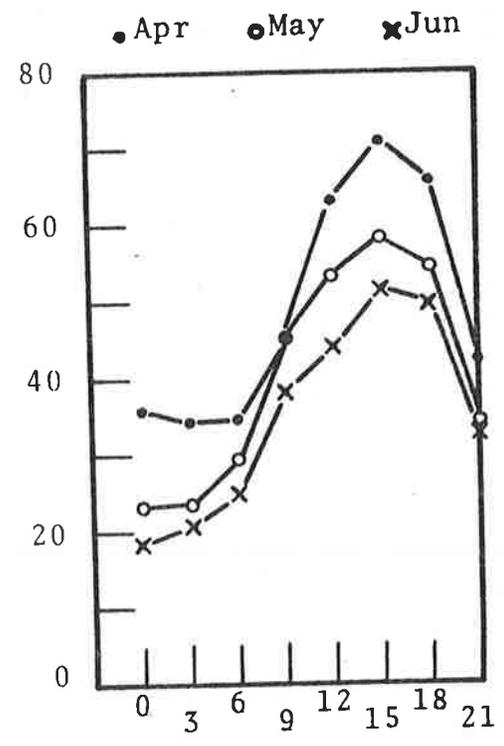
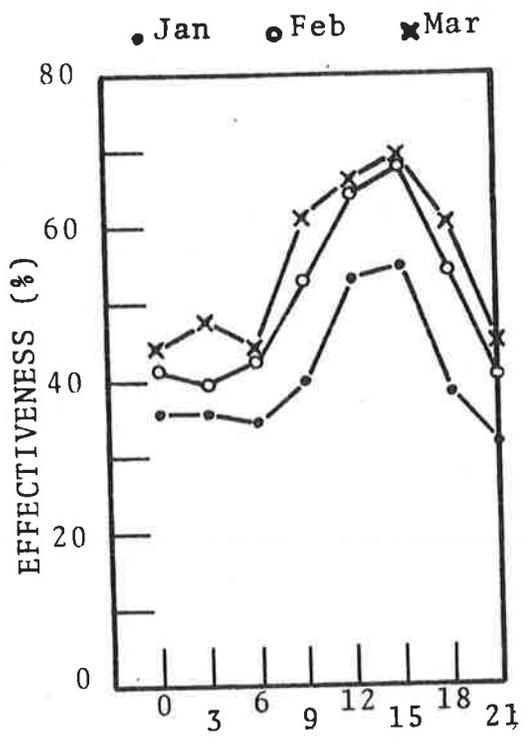


FIGURE 81. VAS EFFECTIVENESS FOR PHL RUNWAY 9/27 (CONCLUDED)

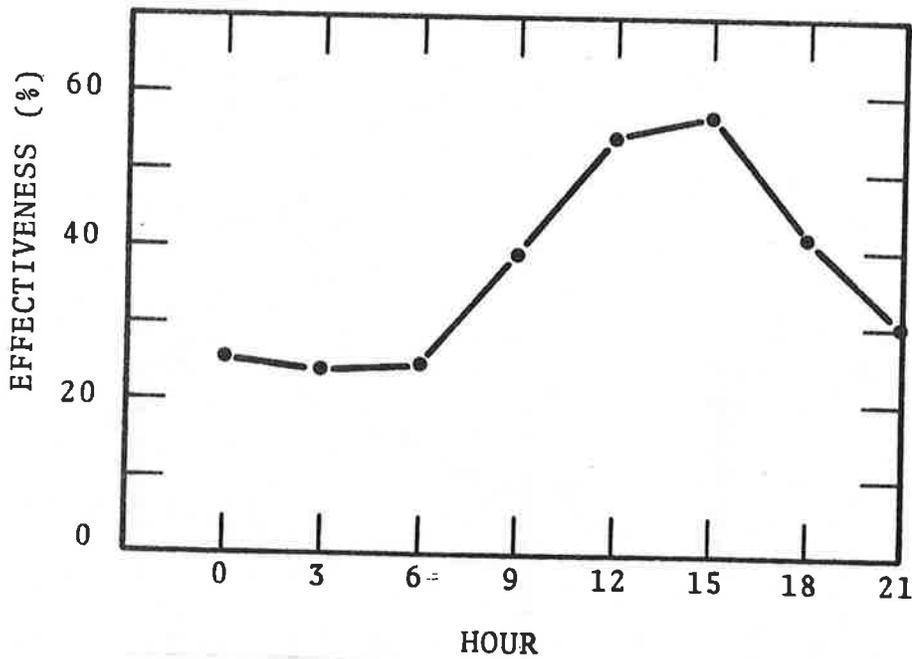
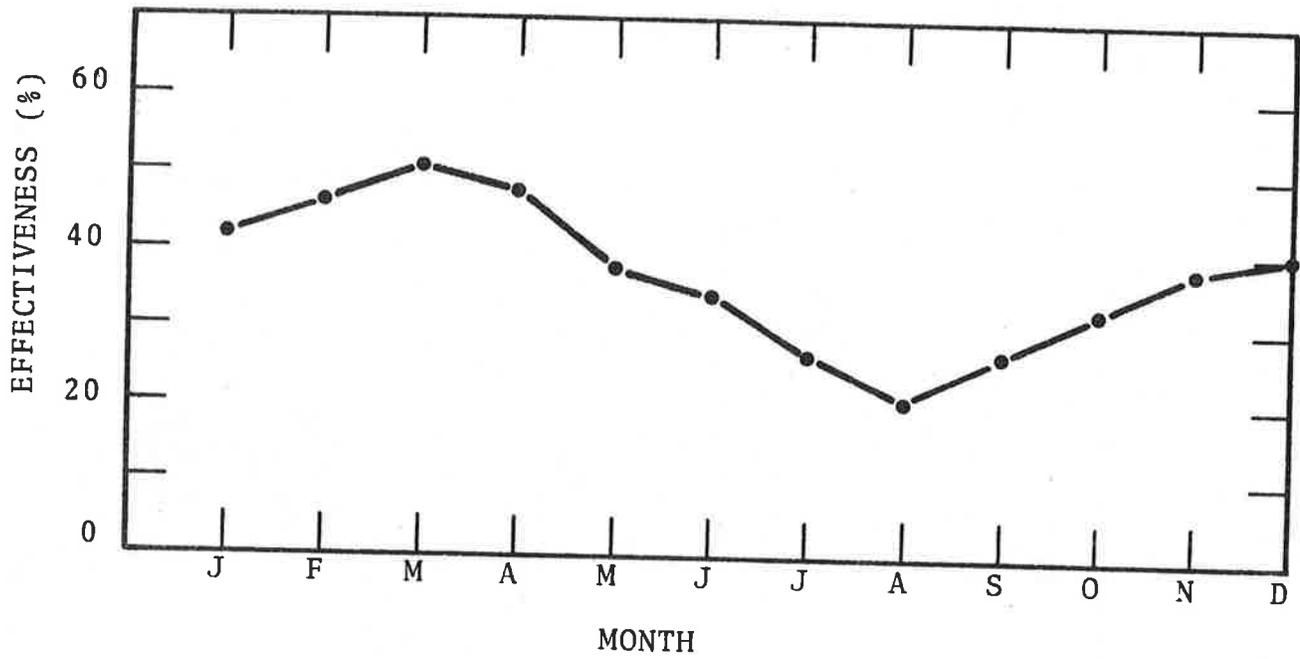


FIGURE 82. VAS EFFECTIVENESS FOR PIT RUNWAY 10/28

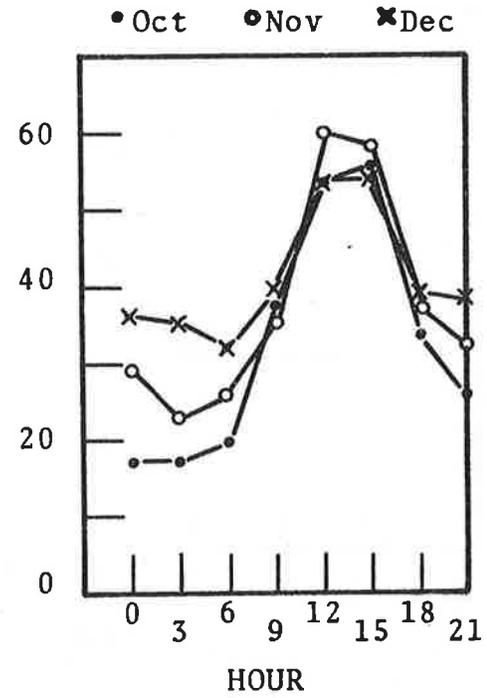
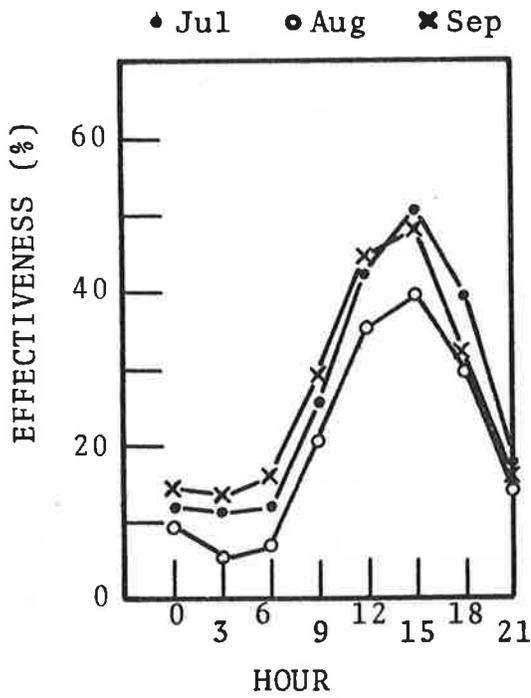
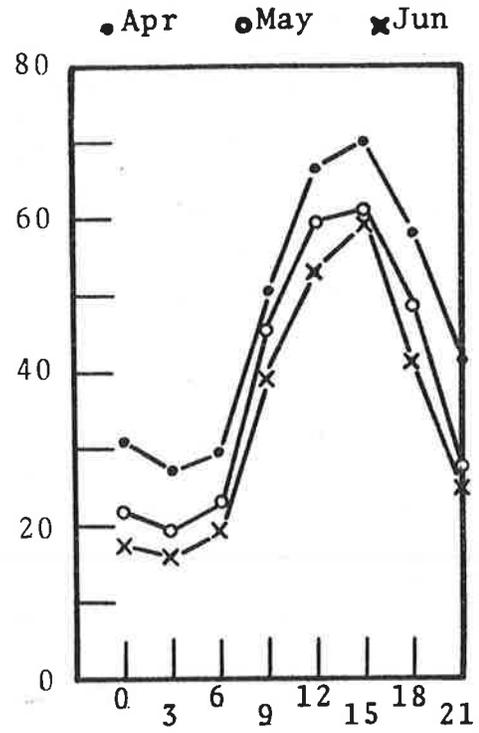
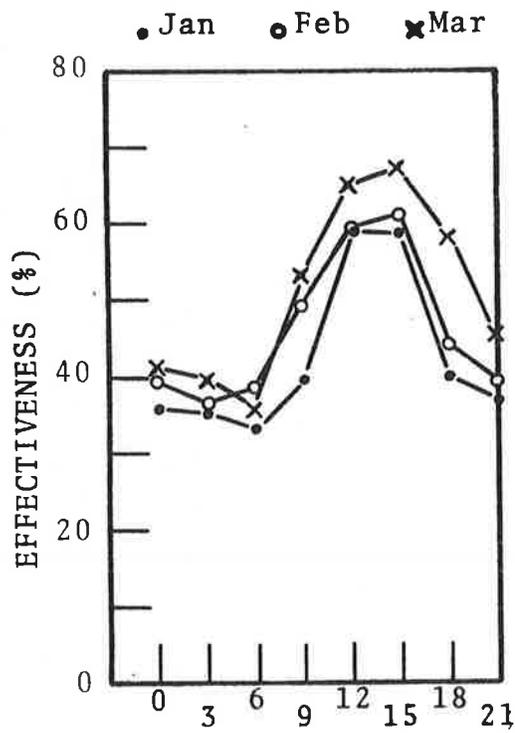


FIGURE 83. VAS EFFECTIVENESS FOR PIT RUNWAY 10/28 (CONCLUDED)

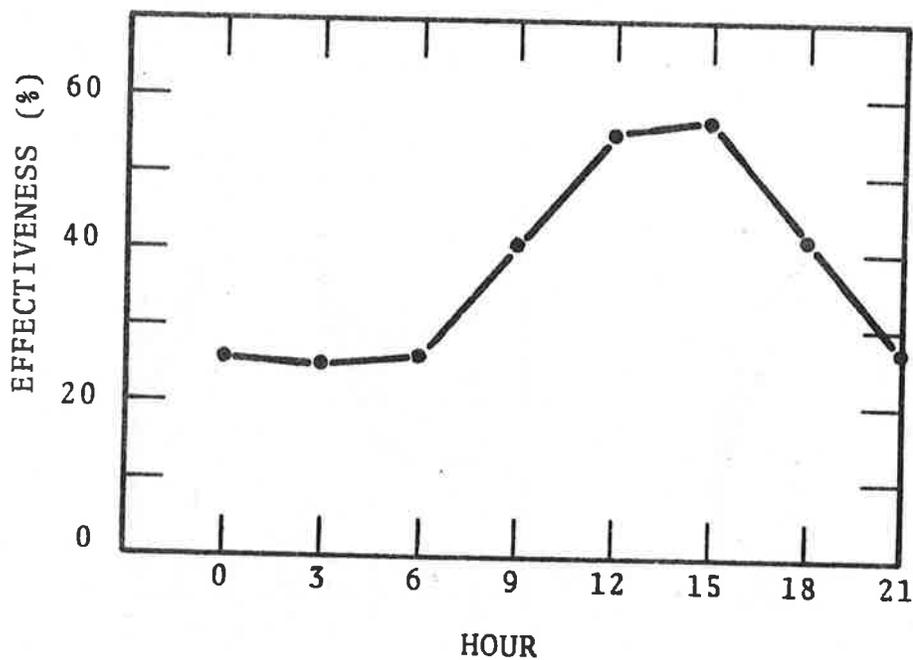
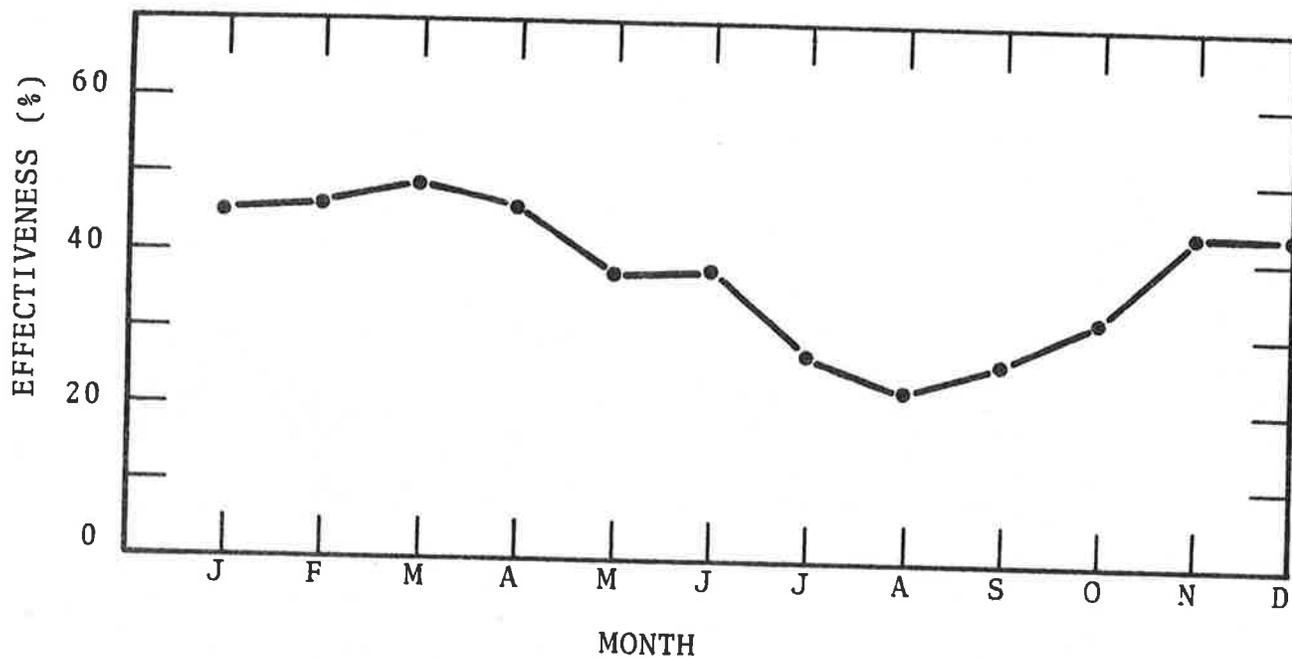


FIGURE 84. VAS EFFECTIVENESS FOR PIT RUNWAY 14/32

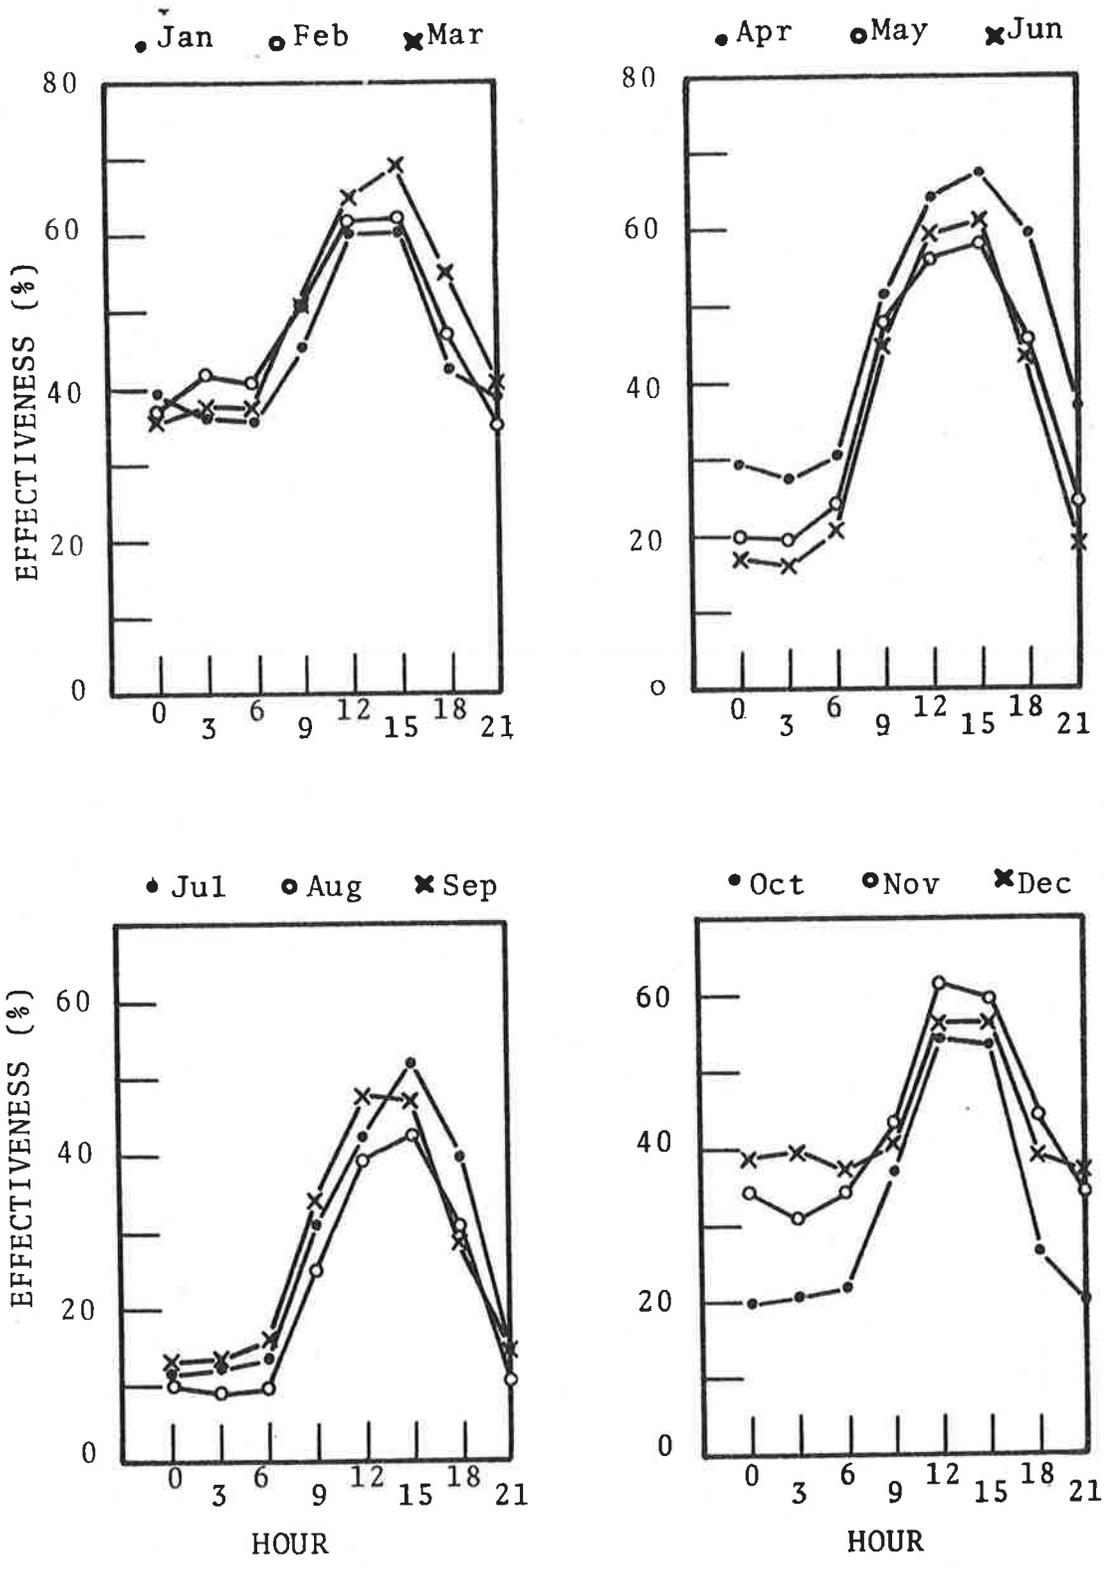


FIGURE 85. VAS EFFECTIVENESS FOR PIT RUNWAY 14/32 (CONCLUDED)

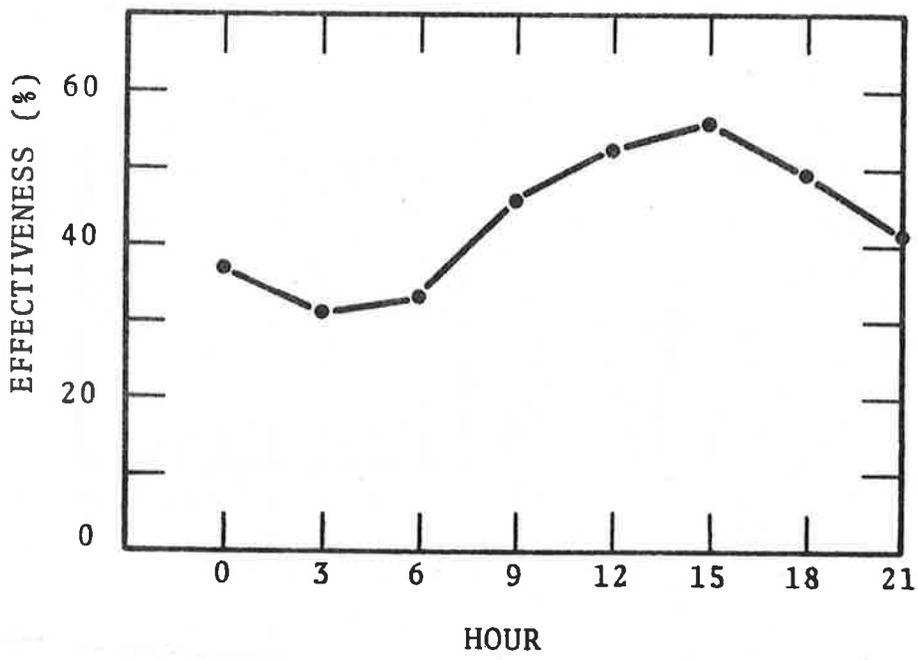
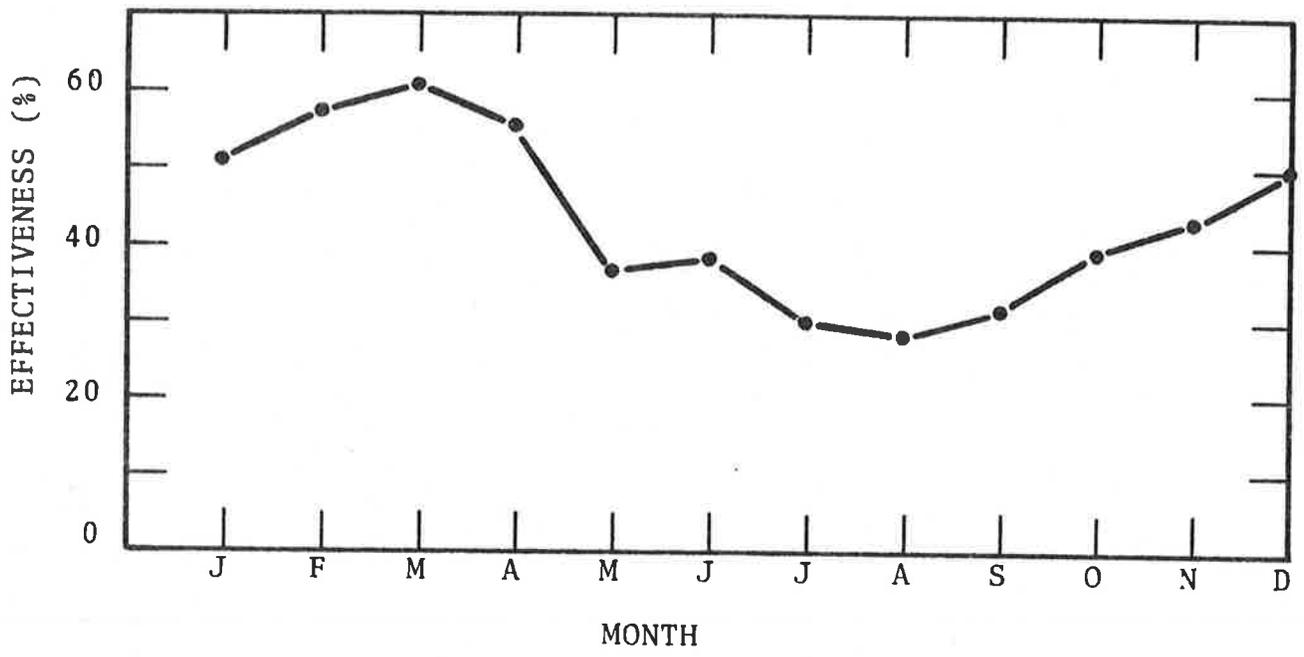


FIGURE 86. VAS EFFECTIVENESS FOR STL RUNWAY 6/24

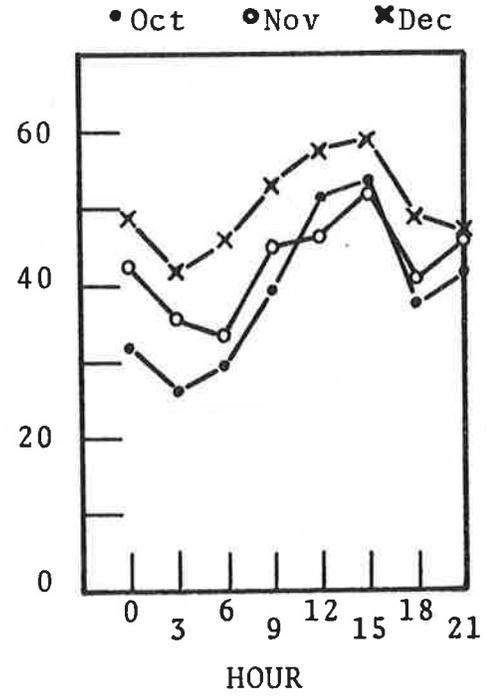
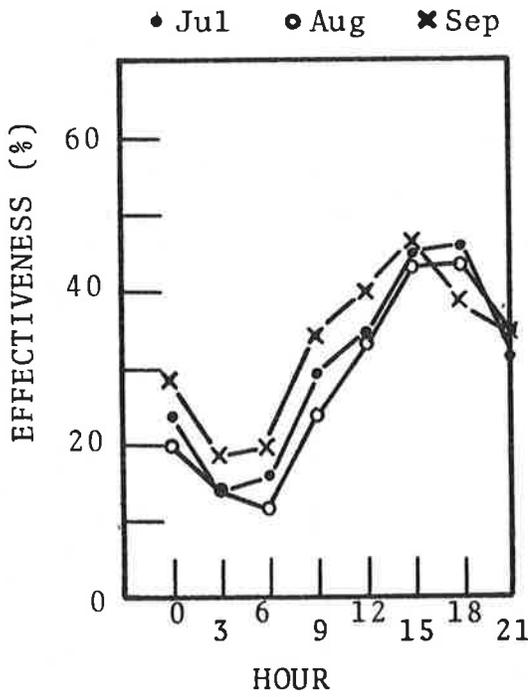
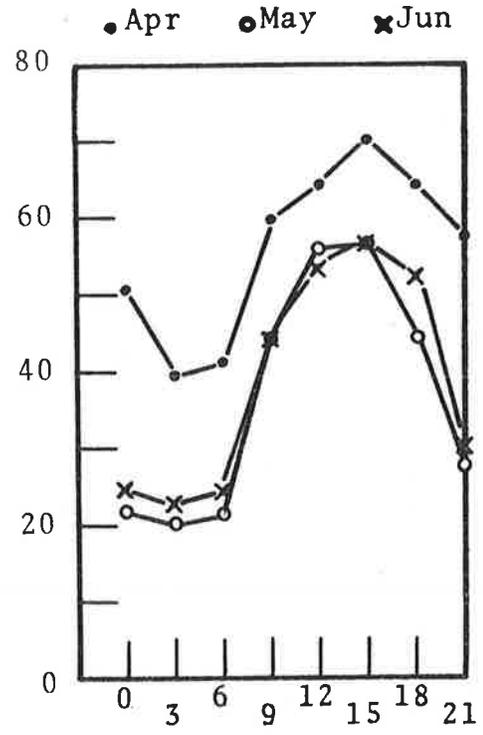
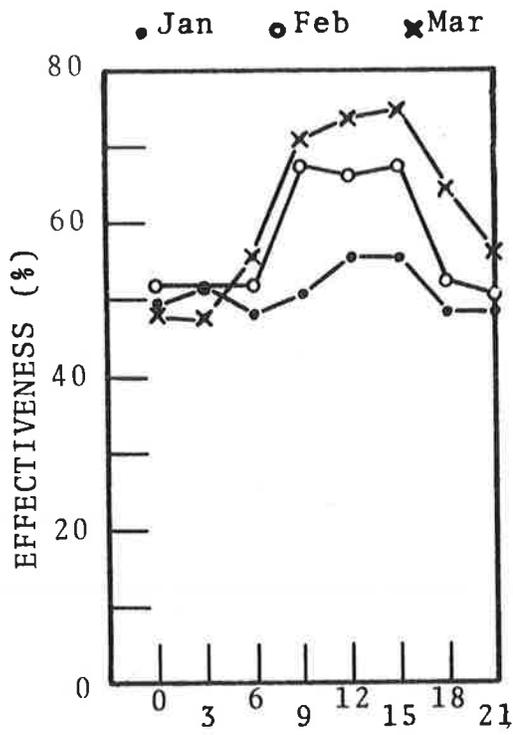


FIGURE 87. VAS EFFECTIVENESS FOR STL RUNWAY 6/24 (CONCLUDED)

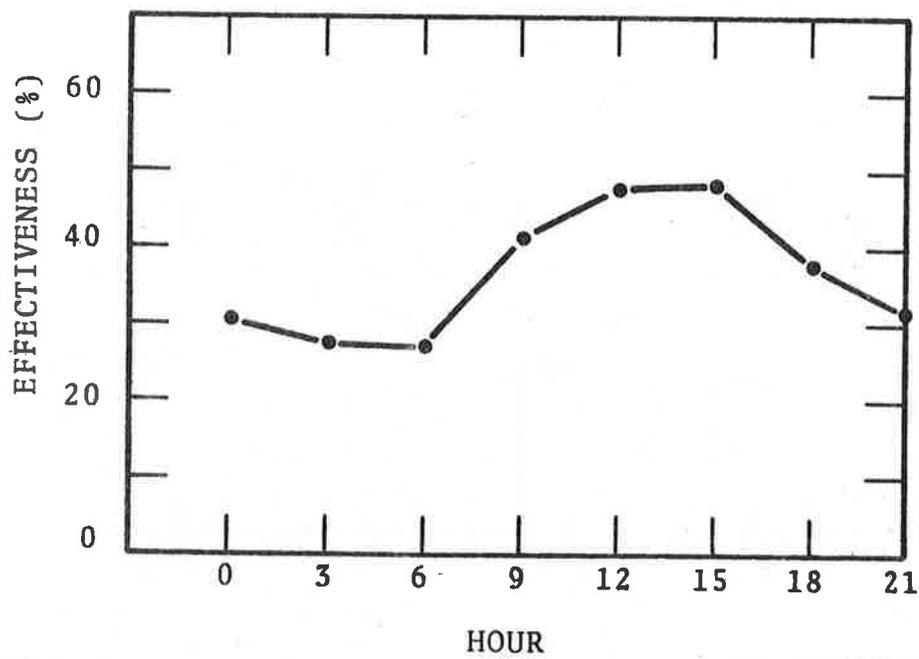
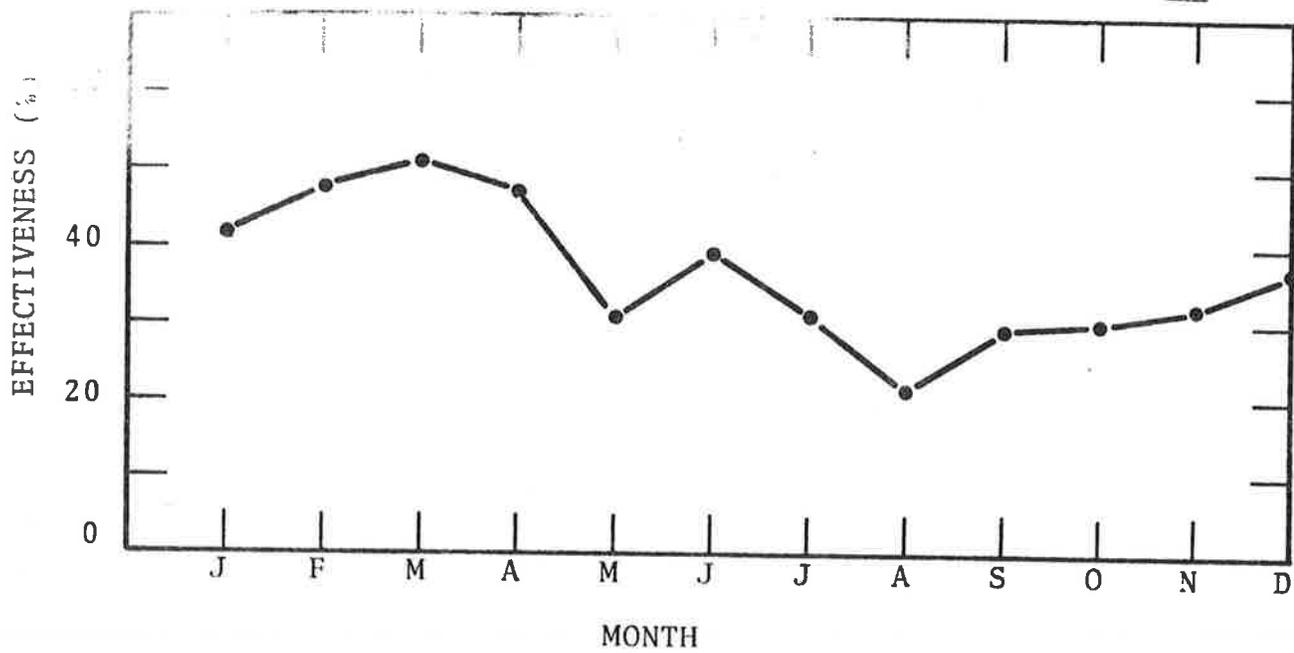


FIGURE 88. VAS EFFECTIVENESS FOR STL RUNWAY 12/30

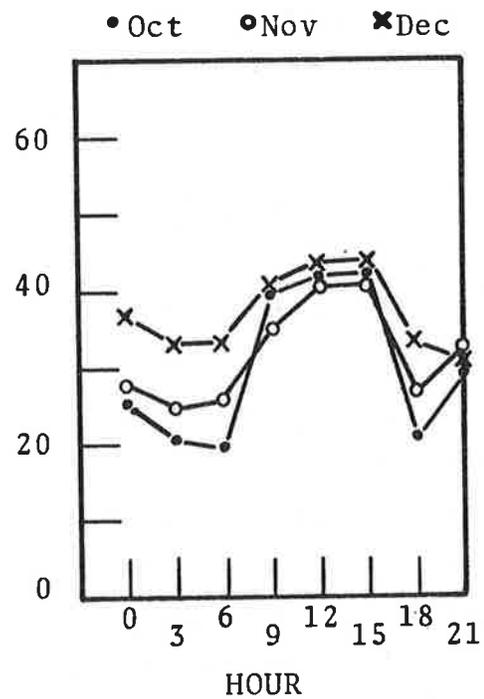
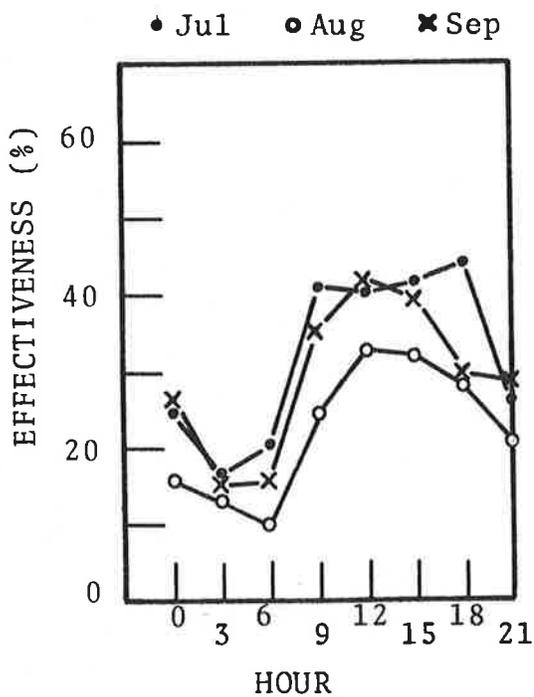
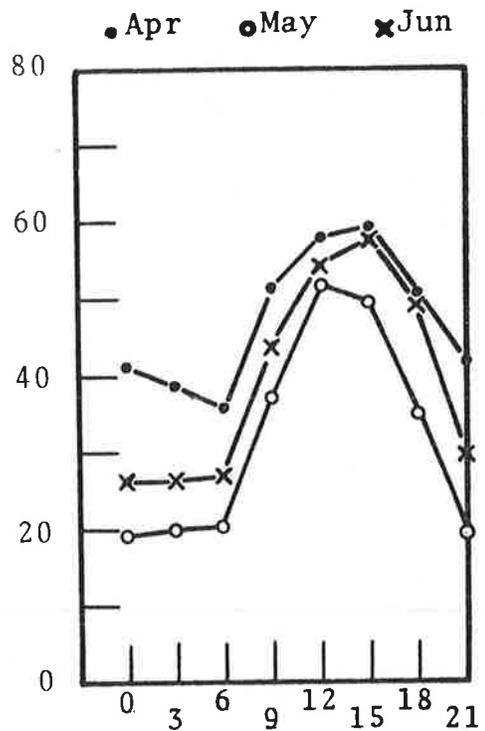
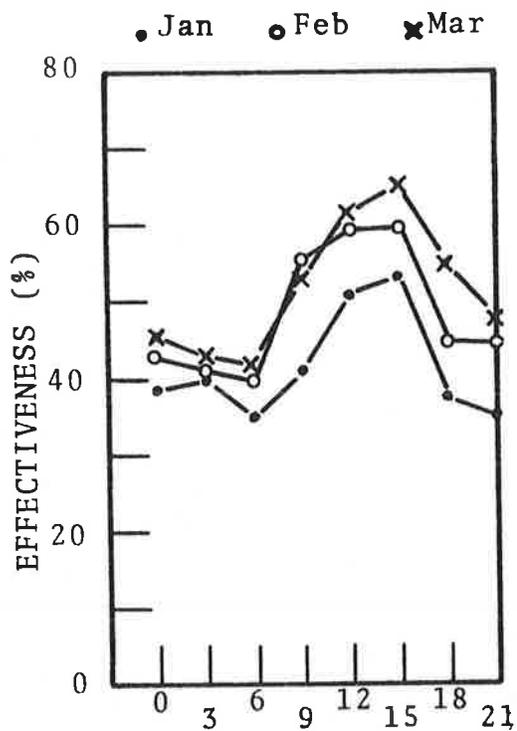


FIGURE 89. VAS EFFECTIVENESS FOR STL RUNWAY 12/30 (CONCLUDED)

4. COMMENTS AND SUMMARY

4.1 OTHER GUARD-BAND SIZES

The effectiveness values presented in Section 3 are predicated on the use of a 2-knot guard band inscribed about the VAS ellipse (see Figure 2). Without a guard band, the VAS could change state (from green to red, from red to green) often. If an air traffic controller could respond to such changes and the attendant effects on the interarrival traffic flow, the VAS could be operated at its maximum efficiency. However, changes in state (green light, red light), particularly rapid changes, decrease the utility of the VAS; hysteresis has been introduced to minimize the number of transitions in state (Section 2.2).

Figure 90 gives a scale factor to be used for various guard-band sizes. The curve is obtained by using the wind data for ORD. For a 2-knot guard band, the scale factor is 1.0. For no guard band, the effectiveness scales of Figures 3 through 89 must be multiplied by a scale factor of approximately 1.34 (note that effectiveness values in excess of 100 percent are interpreted as being equal to 100 percent). For a guard-band size of 8 knots, the effectiveness values must be multiplied by the scale factor of approximately 0.32. In other words, using an 8-knot guard band the effectiveness of the VAS decreases by a factor about one-third, but the number of changes of state (from red to green, from green to red) will decrease by a greater amount. (Volume II of this report will address this situation in great detail for ORD.)

The scale-factor curve has been obtained by calculating the effectiveness curves (for ORD) using various guard-band sizes. The scale factors for each datum point are extracted, and the average scale factor for each guard-band size is then found for the curve in Figure 90.

The scale-factor curve is really valid only for ORD. Applying the curve to the data for other airports, while not strictly

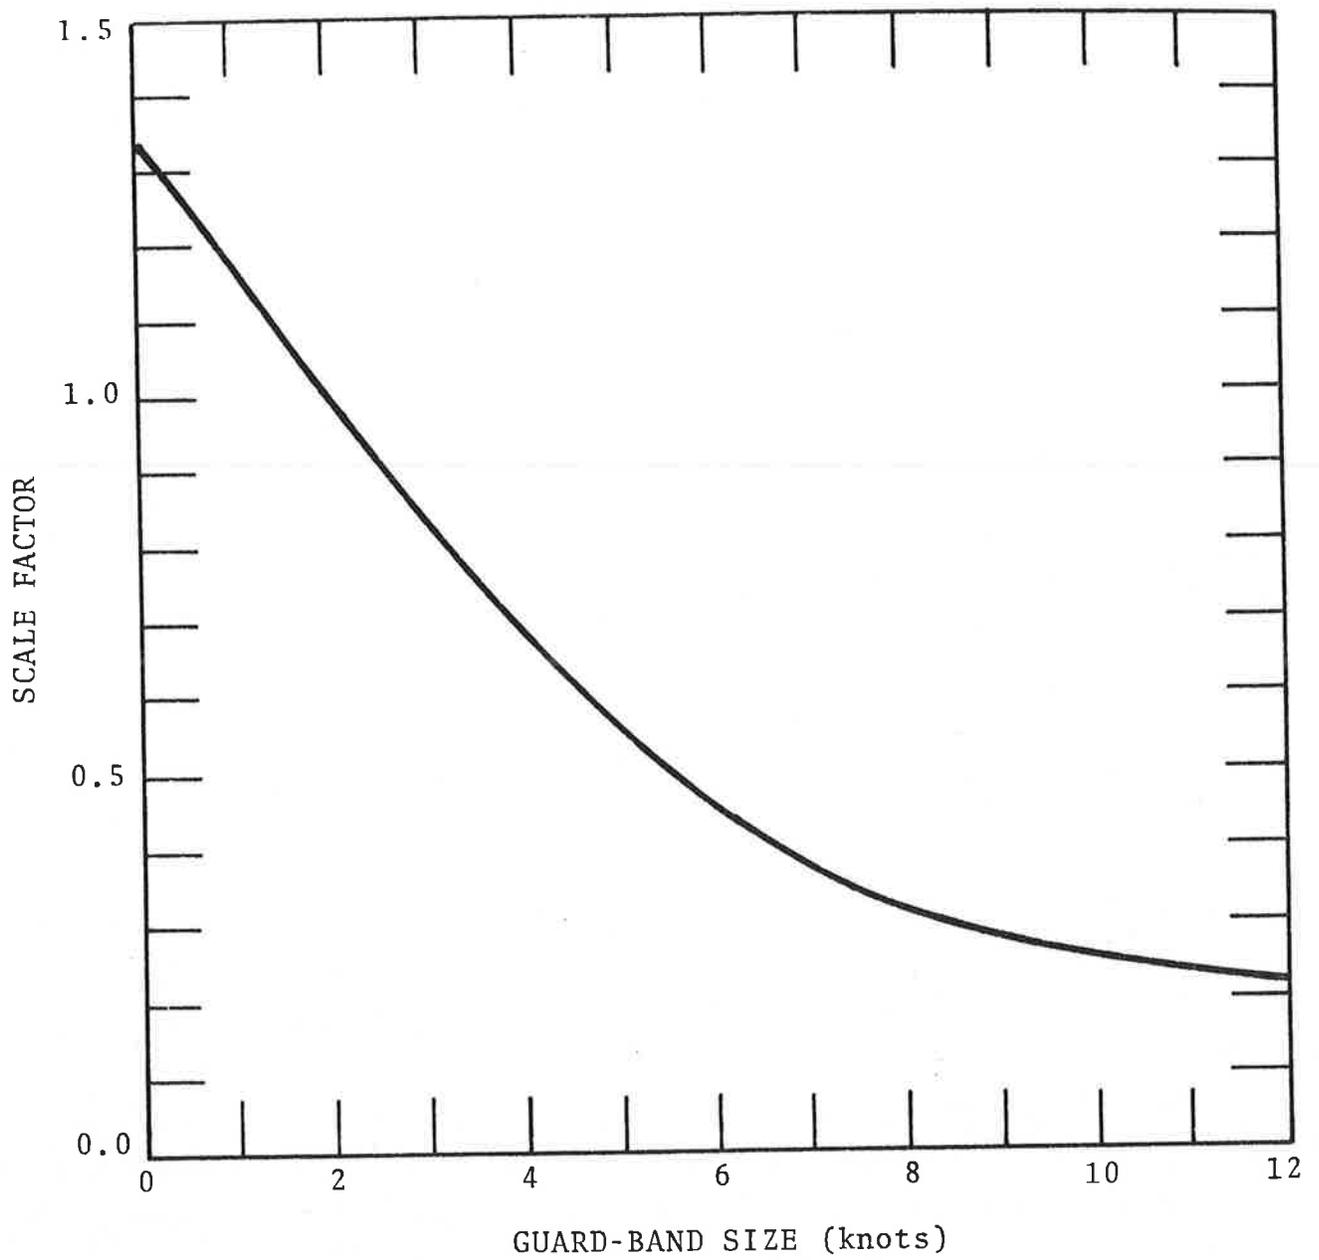


FIGURE 90. SCALE FACTOR FOR VARIOUS GUARD-BAND SIZES

**U.S. DEPARTMENT OF TRANSPORTATION
RESEARCH AND SPECIAL PROGRAMS ADMINISTRATION**

**TRANSPORTATION SYSTEMS CENTER
KENDALL SQUARE, CAMBRIDGE, MA. 02142**

**OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE. \$300**

**POSTAGE AND FEES PAID
U.S. DEPARTMENT OF TRANSPORTATION
613**



Mr. H. Farmer, 141
Room 1249, Bldg. 1, TSC