

METRIC CONVERSION
 1 in = 2.54 cm
 1 ft = 0.3 m
 1 m = 1.61 km



AASHTO DESIGN FACTORS

ALIGNMENT: linear
 VERTICAL SIGHT DISTANCE: good
 POSTED SPEED: 40-50 mph inbound; 35 mph
 HOV and outbound
 ROADSIDE HAZARDS: none
 OTHER HAZARDS: no shoulder over viaduct

MUTCD DESIGN FACTORS

LANE-USE CONTROL SIGNALS: red 'x' and green
 arrows
 ADVANCED WARNING SIGNS: non-standard
 RESTRICTED LANE SIGNS: non-standard
 END OF HOV SIGNS: none
 DIAMOND SYMBOL: none
 HOV DELINEATION: double 4" yellow line and
 flexible posts (40' intervals)

**LONG ISLAND EXPRESSWAY, NEW YORK CITY, NEW YORK
 FIGURE 10**

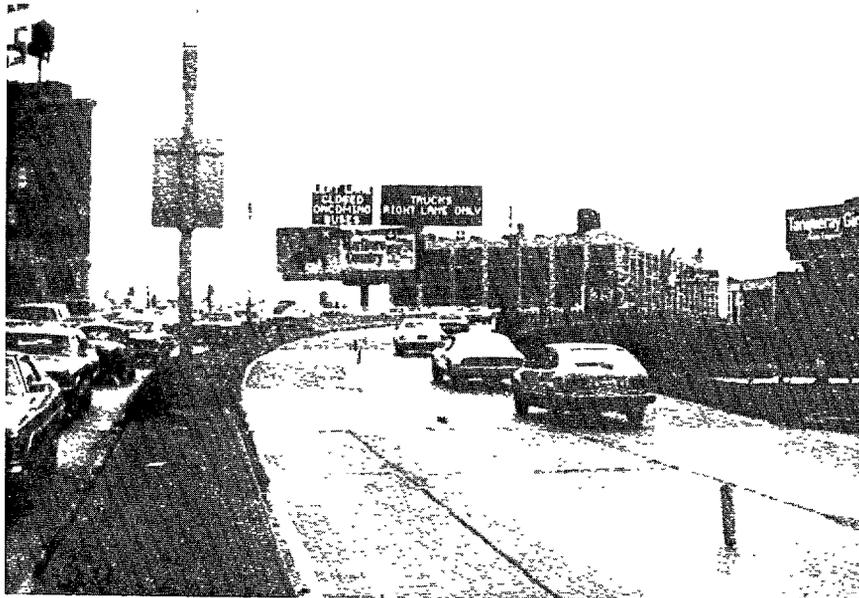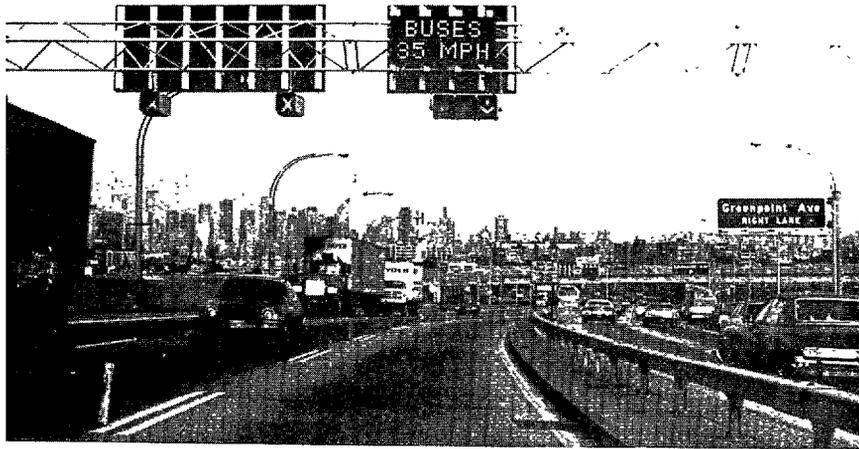

LONG ISLAND EXPRESSWAY, NEW YORK CITY, NEW YORK
FIGURE 10 (CONT.)