



PB98-164841

Transportation Research, Public Service & Education

MPC REPORT NO. 98-95

Investigation of PONTIS —
A Bridge Management Software

Richard M. Gutkowski
Nicholas D. Arenella

August 1998

Colorado State University
Fort Collins, Colorado

North Dakota State University
Fargo, North Dakota

University of Wyoming
Laramie, Wyoming

Utah State University
Logan, Utah

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson D.



PB98-164841

2. REPORT DATE
August 1998

3. REPORT TYPE AND DATES COVERED
project technical

4. TITLE AND SUBTITLE
Investigation of PONTIS -- A Bridge Management Software

5. FUNDING NUMBERS

6. AUTHOR(S)
Richard M. Gutkowski and Nicholas D. Arenella

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
Mountain-Plains Consortium
North Dakota State University
Fargo, ND

8. PERFORMING ORGANIZATION REPORT NUMBER

MPC 98-95

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)
University Transportation Centers Program
U.S. Department of Transportation
Washington, DC

10. SPONSORING/MONITORING AGENCY REPORT NUMBER

11. SUPPLEMENTARY NOTES

12a. DISTRIBUTION/AVAILABILITY STATEMENT

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

In 1991 federal transportation legislation, Congress mandated that state DOTs develop and implement comprehensive bridge management systems (BMS). Related to this, a rigorous BMS software package, PONTIS, was developed via federal contracting to industry. Since the national bridge inventory was to be based on PONTIS, many states elected to adopt it as their BMS. A major aspect was the need to introduce PONTIS to local and county bridge owners and prepare them for its implementation.

PONTIS is a complex, exhaustive software package with extensive documentation. It greatly expands the bridge inspection process; requiring more detailed data, providing statistical and probabilistic capabilities and ability to perform "what if?" repair/replace scenarios as part of management decisions concerning entire local, county or state bridge inventories. A need existed to provide new users -- particularly at the local and county level -- a much-abbreviated introductory user's guide for PONTIS. The purpose was to enable ready familiarization with PONTIS capabilities and example cases of its use at various management levels.

This research provided the needed introductory guide, titled "PONTIS Made S-I-M-P-L-E."

14. SUBJECT TERMS
bridge management, PONTIS, software

15. NUMBER OF PAGES
77

16. PRICE CODE

17. SECURITY CLASSIFICATION OF REPORT

18. SECURITY CLASSIFICATION OF THIS PAGE

19. SECURITY CLASSIFICATION OF ABSTRACT

20. LIMITATION OF ABSTRACT
UL

**INVESTIGATION OF *PONTIS* -
A BRIDGE MANAGEMENT SOFTWARE**

Richard M. Gutkowski
Principal Investigator
Department of Civil Engineering
Colorado State University

Nicholas D. Arenella
Graduate Research Assistant
Department of Civil Engineering
Colorado State University

August 1998

ACKNOWLEDGEMENTS

This research has been conducted under support from the Mountain Plains Consortium of the U.S. Department of Transportation's University Transportation Centers Program and Colorado State University. Walt Mystkowski, Bridge Inspection Engineer at the Colorado Department of Transportation (CDOT), was extensively involved in the conduct of the project. Being responsible for the CDOT's implementation of PONTIS, he provided direct assistance with access to the PONTIS software, guidance to the graduate student in its use and in the planning of the "hands on" demonstration workshop conducted during the research. Matthew Greer, Division Bridge Engineer for the Colorado Division of the Federal Highway Administration, provided insight and assistance from the federal aspects of the implementation of PONTIS. They and many other individuals from Colorado local and county transportation agencies directly participated in the "hands on" workshop activities.

DISCLAIMER

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. This document is disseminated under the sponsorship of the Department of Transportation, University Transportation Centers Program, in the interest of information exchange. The U.S. Government assumes no liability for the contents or use thereof.

ABSTRACT

In 1991 federal transportation legislation, Congress mandated that state Departments of Transportation develop and implement comprehensive bridge management systems (BMS). Related to this, a rigorous BMS software package, PONTIS, was developed via federal contracting to industry. Since the national bridge inventory was to be based on PONTIS, many states elected to adopt it as their BMS. A major aspect was the need to introduce PONTIS to local and county bridge owners and prepare them for its implementation.

PONTIS is a complex, exhaustive software package with extensive documentation. It greatly expands the bridge inspection process; requiring more detailed data, providing statistical and probabilistic capabilities and ability to perform "what if?" repair/replace scenarios as part of management decisions concerning entire local, county or state bridge inventories. A need existed to provide new users — particularly at the local and county level — a much-abbreviated introductory user's guide for PONTIS. The purpose was to enable ready familiarization with PONTIS capabilities and example cases of its use at various management levels.

This research provided the needed introductory guide, titled "PONTIS Made S-I-M-P-L-E." A graduate student experienced in bridge inspection, but unfamiliar with PONTIS was the active researcher under faculty and Colorado Department of Transportation guidance. Draft versions of the document were trial run by representative intended users in a "hands-on" workshop. The identified PONTIS based issues and needs, and the process leading to the user-friendly end result are described in this report.

TABLE OF CONTENTS

EXECUTIVE SUMMARY	1
INTRODUCTION	3
CONDITION OF TODAY'S BRIDGES	3
BACKGROUND TO THE NBIS DATABASE	4
THE PONTIS BMS	5
PROJECT OBJECTIVES	5
THE STUDY	7
KICK-OFF MEETING WITH THE COLORADO DEPARTMENT OF TRANSPORTATION	7
MEETINGS WITH LOCAL BRIDGE MANAGEMENT OFFICIALS	7
PONTIS QUESTIONNAIRE TO LOCAL BRIDGE MANAGEMENT OFFICIALS	8
RESULTS AND CONCLUSIONS FROM THE QUESTIONNAIRE	9
PONTIS AND THE ABBREVIATED PONTIS MANUAL	11
Background Information on the PONTIS Software	11
STATISTICAL THEORY	11
THE PONTIS BRIDGE INSPECTION PROCESS	13
SCOPE AND ATTRIBUTES OF THE ABBREVIATED MANUAL	15
RESULTS OF TESTING THE ABBREVIATED MANUAL	19
AREAS OF FUTURE RESEARCH	23
Background to the Project	23
CONCLUSIONS	27

APPENDIX A. LETTER SOLICITATING INTEREST	31
APPENDIX B. INITIAL QUESTIONNAIRE	35
APPENDIX C. PONTIS MADE S-I-M-P-L-E	39
APPENDIX D. PUBLICITY FOR THE PROJECT AND WORKSHOP	49
APPENDIX E. PONTIS MADE SIMPLE - A WORKSHOP	57
APPENDIX F. TEL8 SEMINAR ANNOUNCEMENT	67

EXECUTIVE SUMMARY

The 1991 Intermodal Surface Transportation Act (ISTEA) mandated that each state develops a bridge management system (BMS). Many states began installation and implementation of PONTIS, a federally-funded and advocated computerized BMS. PONTIS was developed, via contract to industry, as an eventual replacement of the existing National Bridge Inventory System (NBIS).

The NBIS provided for conduct and documentation of bridge inspection according to a prescribed inventory appraisal sheet. An NBIS inspection produces a sufficiency rating (SR), which is a broad rating of the “goodness” of a bridge. The SR is largely based on subjective criteria and a quantitative load rating. Bridges are qualified and ranked for federal repair and replacement funds based on their SRs. It evolved that, by using the NBIS procedure, fund allocation was being done with insufficient information, data and tools. More detailed inspection data, statistical features and decision-making tools were needed.

PONTIS is comprehensive BMS software that provides the needed capabilities. However, its documentation and use is overwhelming to the new user. To a large degree, PONTIS is in a “black box” environment and masks the rigor and complexity of its workings and versatility. County and local bridge owners and managers are accustomed to inventorying by the NBIS approach and have evolved a “feel” for its outcomes. Indeed, some initial action was taken to develop a “translator” program to convert between the NBIS and PONTIS databases.

The research conducted in this project addressed the following needs:

- (1) Examination of the PONTIS documentation with the incentive of developing a simplified user’s guide
- (2) Investigation of the inner workings of PONTIS from a neophyte user's perspective, so as to convey them succinctly and clearly
- (3) Writing an abbreviated PONTIS documentation and commentary for new users

- (4) Evolve a prototype version and conduct a “hands-on” workshop for representative users from local, county and state agencies
- (5) Refine and finalize the manuscript into a user-friendly introductory user’s manual and tutorial

Working in conjunction with representatives of the bridge management section of the Staff Bridge Division of the Colorado Department of Transportation, researchers at Colorado State University (CSU) achieved the above needs. Via the workshop, interactive feedback from the direct user was obtained to refine and customize the document to their expressed preferences and needs. The complete process and outcomes are described here as is the availability of the document itself.

INTRODUCTION

The Colorado Department of Transportation (CDOT) is implementing the mandated use of PONTIS, a federally-advocated bridge inspection/management computer package. Many potential users are unfamiliar with the technical basis and workings of this software. This is due in part to the highly advanced nature and technical sophistication of the underlying probability based methods, which are the foundation of PONTIS. This project was aimed at facilitating the use of PONTIS for new users at various levels of bridge management, particularly local and county agencies.

CONDITION OF TODAY'S BRIDGES

It is known from existing bridge inventory data, that about half of the nearly 580,000 highway bridges in the United States were built before 1940. Most of the bridges were designed for less traffic, smaller vehicles, slower speeds, and lighter loads than are presently encountered on the nation's highways. Lack of maintenance also caused deterioration not only in the older bridges, but in newer ones as well. Nearly half the pre-1940 bridges initially were classified as "structurally deficient" or "functionally obsolete" by the Federal Highway Administration (FHWA). This assessment was based on inspection data and classifications contained in the National Bridge Inventory System (NBIS) at the time.

Based on the NBIS database, the cost of rehabilitation and replacement of the inadequate bridges initially was estimated at more than \$50 billion. However, only 2-3 billion federal dollars annually have been available through the Highway Bridge Rehabilitation and Replacement Program. Thus, only a few thousand bridges are repaired or replaced annually; other satisfactory bridges age more and enter the pool as time passes. The available funds — even with augmentation funds available in some state bridge funding programs — will not permit rehabilitation or replacement of all deficient/obsolete bridges on a realizable time frame

BACKGROUND TO THE NBIS DATABASE

The NBIS was developed as a consequence of several events. In particular, a series of catastrophic bridge failures occurred in the 1960s (1,2). Some newsworthy collapses of long span bridges involving loss of human lives highlighted the gravity of situation to the public. Congressional action led to the passage of the “Federal Highway Act of 1968,” which mandated basic regulations relating to bridge safety and bridge management and resulted in two important developments — updating of bridge inspection methodology leading to a comprehensive bridge inspection manual and the computerized NBIS. For collection of the needed current data, inspection of all highway bridges over 20 feet in length was mandated as well as thereafter on a biennial basis.

The NBIS-based bridge inspection process implemented a “sufficiency rating” (SR) for each bridge to reflect its physical state, functional condition, and load rating. SR values were used as the basis for determining a bridge’s eligibility for competitive federal and state bridge funds. However, the NBIS process proved to be less detailed than needed. The SR values rely on qualitative visual assessments reflecting the experience and judgement of the bridge inspector. The bridge inspector uses single integer number measures to assign a state of condition to a bridge superstructure, substructure, channel etc. They are incorporated into the SR to numerically characterize or rank the overall condition of a bridge.

The NBIS provides no capability to detail the relative extent of deterioration in members, project usable remaining life or assess the functional and fiscal impact in maintenance management of the inventory. A need to document bridge inspection with more detailed and rigor inspections became evident. With limited funds it was vital to have more reliable assessment of the reality of the repair needs and benefits than the sufficiency rating provides. “Reliable” implies more detailed inspection data as well as probabilistic considerations in the condition assessment. It also was necessary to provide means of comparing the needs and merits of bridge repair and replacement decisions within the scope of a state’s entire inventory of roads, bridges and other systems.

THE PONTIS BMS

The 1991 Intermodal Surface Transportation Efficiency Act (ISTEA) mandated that each state DOT develop a bridge management system (BMS) on a defined time schedule. The CDOT, and many other state DOTs, began implementing the use of PONTIS, a federally-advocated, computer-based BMS model. PONTIS eventually will replace current inspection and inventorying procedures based on the NBIS. PONTIS allows more detail about individual bridge components. It also can be used to assess the state of deterioration and likely consequences, allowing “what if?” scenarios to be examined. However, PONTIS presently is a “black box” environment to users. Also, county and local bridge owners are accustomed to inventorying bridges by the NBI approach and have a “feel” for the resulting, albeit simplified, report data that results. Indeed, initially a translator program was developed to approximately convert NBIS data base information to the PONTIS data base format and vice-versa.

PROJECT OBJECTIVES

In simple terms, the documentation provided with PONTIS can be overwhelming to the new user, even if experienced with other BMS software. Researchers at CSU, working with the CDOT bridge management personnel, undertook the writing of a user-friendly documentation and commentary. The outcome was much abbreviated material that explains PONTIS and its use to a bridge inspector or manager in a targeted and usable way. This is done for a range of management levels.

Unlike the NBIS, PONTIS has statistical models to operate on groups of bridges or whole inventories. At the state DOT level, the complete state bridge inventory is involved and must be managed at the global level and, to a lesser degree, at the detailed level. At county or local levels, the need may be quite detailed or not depending on the approach at any given jurisdiction. Bridge inspection may be done in-house or by sub-contracting. In the former case, detailed knowledge of PONTIS usage is imperative. In the latter case, a manager may operate at the level of interpreting results, observing overall activity

and developments, and conveying or receiving PONTIS information to and from the state DOT as related to the particular local or county inventory.

An equally vital aspect is that the mandated BMS must be capable of assessing deterioration, projecting its consequences on repair needs, planning resource allocation by priorities and relating the impact of bridge repair needs in other systems management needs, e.g. pavement management. PONTIS provides these capabilities and is a completely new element of capability available to the learner who is only accustomed to the NBIS.

THE STUDY

PONTIS is an extremely powerful BMS tool, which surpasses the capacity of NBIS in helping officials to manage their bridge networks. However, since PONTIS is so powerful, it also is complex. This is reflected by the extensive documentation associated with the software.

As is often the case with such powerful software, few users actually need to tap into all of its abilities and features. People are not inclined to embrace a radically different BMS when confronted with several hundred pages of manuals, therefore the main objective of the CSU researchers was to develop user-friendly documentation for the PONTIS software.

KICK-OFF MEETING WITH THE COLORADO DEPARTMENT OF TRANSPORTATION

The research process with regard to new PONTIS documentation essential began with a kick-off meeting Nov. 23, 1994. The meeting involved the co-author Nicholas Arenella, CSU graduate research assistant, and Walter Mystkowski, CDOT bridge management engineer.

The general time line for the project was discussed at this meeting. More importantly, the general make up of the study, as set forth in the scope of work, was more rigorously defined. In general, the study was to consist of several meetings with local bridge management officials to get a sampling of their questions and concerns regarding PONTIS in general. Next, a comprehensive questionnaire was to be developed based on the interviews and then sent to local bridge management officials throughout Colorado. Based on research results, new PONTIS documentation would be developed.

MEETINGS WITH LOCAL BRIDGE MANAGEMENT OFFICIALS

After the kick-off meeting, a meeting was set with several local bridge management officials. On Jan. 9, 1995, CSU researchers mailed letters (see Appendix A) to individuals in nearby locations

introducing the PONTIS project and requesting an interview to discuss questions, concerns and desired results for such a project.

This letter was proceeded by interviews of three people selected from the responding individuals:

- 1) Mike Whalen of the Weld County Engineering Department, Greeley, Colo. on March 31, 1995;
- 2) Ron Winne, et. al. of the Larimer County Engineering Department, Fort Collins, Colo., on Jan. 26, 1995; and 3) Greg Muhonen of the City of Loveland Street Division-Maintenance in Loveland, Colo., on Jan. 24, 1995. The meetings were each approximately two hours long with an open format keeping a constant focus on how to make it easier for local and county users to take advantage of PONTIS.

The meetings gave the CSU interviewer insight into the specific needs of actual potential users. The interviews were beneficial in this sense, because the individuals being interviewed were typical of the personnel that would be inspecting and rating the structures, preparing the input and responsible to varying degrees for the allocation of funds in their respective jurisdictions. Subsequently, a questionnaire was written by the CSU researchers and reviewed by CDOT for input from other bridge management officials on topics generated from the original interviews.

PONTIS QUESTIONNAIRE TO LOCAL BRIDGE MANAGEMENT OFFICIALS

The resulting questionnaire addressed many topics (see Appendix B). The questions ranged from the practical, such as “Do you have an IBM or compatible computer?” to the more probing such as, “Whether or not you know about PONTIS specifically.” “ If a bridge management software package could do anything you wish, what would like to get as its principal output?” Approximately 20 surveys were mailed out and seven were returned.

RESULTS AND CONCLUSIONS FROM THE QUESTIONNAIRE

The returned surveys indicated definite consistencies. As anticipated, local and county bridge management officials did want more user-friendly PONTIS documentation. However, it also was learned that such documentation should not only be user-friendlier, but drastically abbreviated. There was a consensus that these officials did not require an understanding of the complex theory behind PONTIS' statistical models or several mathematically elegant ways of obtaining the same information. It also became apparent, that such documentation should not only serve as a reference, but as a teaching tool. The resulting documentation, therefore, is an abbreviated user's manual as well as a tutorial. Before discussing the resulting documentation developed at CSU, it is helpful to discuss the PONTIS software in more detail.

PONTIS AND THE ABBREVIATED PONTIS MANUAL

Background Information on the PONTIS Software

To develop statistical models and software that accomplishes goals for a BMS as set forth by the ISTEA, the bridge management problem must be seen in a fundamentally different way from what has been suggested and practiced earlier. According to the PONTIS developers, it was necessary to look at the problem **not** from the point of view of doing what was possible with the data on bridges collected over the years according to the FHWA rating method. An approach was taken which assumed there are better ways to present the information gathered from inspections rather than lumping all of the information in one rating number.

As will be described, the current rating method, despite its advantages for descriptive purposes, has severe limitations, which would make models based on it questionable. Although rating numbers are good descriptive measures and easy to communicate — after all, they assume that one number can describe a deck, substructure or superstructure — another option has been selected, which allows presentations of information to the model in much greater detail (page 10 of Tech. Manual).

STATISTICAL THEORY

At its roots, PONTIS is a decision support system that uses a probabilistic Markovian model for optimizations (Thompson, 1993). The Markovian model has two particular characteristics that make it well suited for use in PONTIS. One is the assumption made about the source of information. The other is the way in which the model operates on that information.

The Markovian model is based on different assumptions than those of typical random variable statistics. In the simpler, more commonly understood field of random variable statistics, one assumes that the information to be transmitted consists of the outcome of an experiment involving a random variable X . For such an experiment, if successive values of X are to be transmitted, the values are

assumed to be independently chosen. However, in a Markovian model, any given transmitted value off is *dependent* on *all* preceding values of X (Ash p 169). In the case of PONTIS and bridge inspection and management this can be illustrated as follows.

Assume that in a previous inspection report a structural element was given a low value corresponding to a deteriorated state. Now, unlike the rolling of die, the chance of the element having a particular rating in the future is not evenly distributed among all possible ratings. This would be impossible in the case of a high rating, which indicates the element was in good condition, because it is not possible for an element to spontaneously become less deteriorated. In this case, the probability of future states is not random, but based on the past history of the variable.

The other characteristic of interest of the Markovian model is that it operates on the functions of variables — actually chains of variables — rather than on the chains directly (Rosenblatt p. 87). This has the direct advantage taking into account other factors that affect a variable other than only its previous history. Again, using the same example above, assume that an element has been rated low in a previous inspection. It already has been shown that in a Markovian model the increased likelihood of some future outcomes over others can be modeled. However, in addition to this, one also can take into account other factors using this model.

For example, in PONTIS a deterioration formula is generated by using consecutive inspection reports. That is, the model can take into account, not only that some outcomes of the elements' condition are impossible, but that some may be more likely than others due to the rate of deterioration from the local environment. Further, a Markovian model could include other functions of the chain simultaneously in its decision making process, such as using a formula based on maintenance habits of a particular jurisdiction, which are based on answers to an online survey given by PONTIS to potential users.

Also, because the Markovian model can recognize certain outcomes as impossible, it has an indirect advantage. This helps the model to pack more information into a smaller space as far as

computer programming is concerned (Rosenblatt p. 87). Although computer technology continues to grow rapidly, the incredible volume of information associated with a bridge inventory, coupled with the limited resources of rural and local users for high end computer hardware, still makes this an advantage when considering the available RAM, ROM and clock speed of an older, non-networked PC.

THE PONTIS BRIDGE INSPECTION PROCESS

The actual inspection procedures carried out by bridge inspectors in the field are not drastically different for a PONTIS inspection than for a NBI inspection. Actually they are quite similar. However, the ways in which their results are reported, cataloged, and most importantly, used vary.

A bridge inspector examines all the elements of a bridge and makes note of their conditions. However, this detailed work is lost in the results of a NBI inspection because the only information that is readily available to decision makers are the single condition ratings for “deck,” “superstructure,” “substructure,” and “waterway adequacy.” In comparison to that, PONTIS results are element based. Actually, due to mathematical and programming considerations, a PONTIS database is a collection of bridge elements not bridges. Consequently, PONTIS results give an indication of the condition of elements such as bearings or stringers. There are many “standard” elements built into the PONTIS database for the analyst’s use. PONTIS also allows the user to input additional elements that may be unique, or of interest to, a particular agency or individual.

THE UTILIZATION AND ANALYSIS PROCESS

PONTIS is a network level BMS, which incorporates a set of probabilistic models and a detailed bridge database to predict maintenance and improvement needs, recommend optimal policies, and schedule projects within budget and policy constraints. PONTIS makes use of many modules. Some of the modules are not directly accessible by the user. The modules work “behind the scenes” only when

called upon by other modules that do have a user interface. Of the modules with a user interface, there are four that are of the most concern. Following is a brief description of them.

First there is the Database. The database includes all inventory and condition data, and all maintenance improvement and user cost data. It contains answers to an online expert elicitation questionnaire, which are used to set deterioration rates in the model based on several experts' answers to questions concerning deterioration rates.

Second, there is the Maintenance, Repair, and Rehabilitation (MR&R) model. The MR&R model uses deterioration models and maintenance costs to choose minimum cost maintenance strategies for up to 160 different kinds of bridge elements. The MR&R model does not directly take funding constraints into account. It assumes there is unconstrained funding for typically less expensive MR&R actions. If a user's jurisdiction does not have enough money in its MR&R budget, one can overcome this aspect of the software by using a standard PONTIS report that will rank MR&R actions in decreasing order of benefit to cost ratio.

Next, there is the Improvement model. The improvement model in PONTIS is a module used to identify potential improvement action and prioritizes them along with MR&R action. PONTIS has three "improvement" options available to the user. The first two are widening and raising. These improvements are based on existing roadway width and vertical clearance, respectively. The third improvement built into PONTIS is the act of replacement with a functionally-superior structure based on a combination of widening, raising, load carrying capacity and MR&R consideration. The decisions are based on the unit cost for such improvements and MR&R, as compared to the cost for replacement.

Finally, there is the Integration model. The integration model combines the bridge element maintenance results and the improvement projects into a single recommended bridge level program. This capability uses a benefit/cost ranking to set priorities, and respects funding program eligibility requirements and budgets. It should be noted that this is done by assuming all MR&R can be paid for and then scheduling the most beneficial improvements as possible with respect to the budget.

As was earlier noted, PONTIS provides the capability to generate “reports.” Actually, for staff who are responsible for making decisions about the bridge inventory, this is probably the most important and impressive feature of the PONTIS software. PONTIS has many types of reports that it can readily produce via the user selecting from its pull down menu system. An option to customize reports also exists for the advanced user. Possible reports generally fall into two primary categories. The first includes types of reports that simply display vital information in the database in a convenient arrangement, such as “all bridges falling below a certain sufficiency rating.” The second category is defined by those that recommend MR&R and improvement actions in some manner. The second type of report is derived from the results of the probabilistic models and the software’s forecasting capabilities. An example of such a report would be a listing of PONTIS recommended MR&R and improvement actions based on a given budget that most effectively targets an agency’s budget.

The latter example of a typical PONTIS report is tied to another advantage of using PONTIS. By using the PONTIS software, one can readily run “what-if?” analyses. For example, one could raise or lower a given budget to determine its effect not only on the future physical condition of the bridge network, but the possible financial repercussions. Such information could be used to the advantage of an agency trying to substantiate that by cutting funding now, a larger outlay of money will be needed later.

SCOPE AND ATTRIBUTES OF THE ABBREVIATED MANUAL

The major result of this project is documentation that the Colorado State University researchers produced. The document’s preliminary title was “*PONTIS Bridge Management Software, An Introductory User’s Manual and Tutorial for Release 2.0.*” The document is an abbreviated adaptation of the original PONTIS manuals and tutorial (Release 2.0) and, as indicated earlier, was written with the needs of the local and county bridge management community in mind. At the conclusion of the project it was retitled as “*PONTIS Made S-I-M-P-L-E, An Introductory User’s Manual and Tutorial for Release*

2.0.” It was retitled based on the reactions received from attendees at a demonstration workshop held near the project’s conclusion. The full document is available from CSU where it is being maintained (Arenella, et al. 1997). The cover page and table of contents are in Appendix C.

The user’s initial impression of the manual should be favorable. It is 68 pages, making it about one-tenth the length of all the combined PONTIS manuals that come with the software. The manual has five chapters entitled:

- 1) Introduction
- 2) Getting Started
- 3) Bridge Element Information & the Database
- 4) The MR&R Optimization Model
- 5) The Annual Updating Cycle

The chapters address basic information needed for the potential user to quickly begin the process of implementing PONTIS and realizing its potential benefits. The chapters are organized in a logical manner for use by practicing engineers. They also are presented in an order relative to each other, which is most beneficial to the user who wishes to quickly “get up to speed” in implementing PONTIS. For example, in Section 3.1.1 of the CSU documentation it states, “Building the database is a relatively straight forward, although initially a somewhat time-consuming step. However, fortunately, the other modules of PONTIS do not have to be understood, or even accessed, for a user to effectively begin the process of building the database and thus, begin to realize the advantages of PONTIS.” This passage is indicative of how, throughout *PONTIS Made S-I-M-P-L-E*, information is presented not only in a clear, concise, and useful manner for the user, but that the sensibilities and needs of the intended user — local and county bridge engineers and managers — are always kept in mind.

As was previously mentioned, the manual was developed to serve not only as a reference, but also as a teaching tool. As with many manuals, examples are used to illustrate different features of PONTIS. In this manual, examples throughout the manual have been tied together through a common

example. People reading the manual can quickly assimilate how to implement PONTIS on their bridge inventories. To accomplish this most effectively, a miniature database of 16 actual bridges from Virginia is used throughout the manual. By using real bridges, users immediately get a feel for how to implement PONTIS for their bridges.

RESULTS OF TESTING THE ABBREVIATED MANUAL

The document produced at CSU was reviewed and revised in house several times to produce a clear, concise, and useful document. Then it was sent to select persons for content review. Once it was revised, the researchers went through every example to make sure that every PONTIS command entered and every response to the commands was consistent to examples in the developed manual.

To test the manual's effectiveness, a hands-on workshop was conducted May 3, 1998, for a small group — due to physical constraints — of selected participants. Some were sent an announcement and invitation (see Appendix D). Some were identified via an announcement (see Appendix D) in the newsletter of the Colorado Transportation Information Program, which is the Local Transportation Assistance Program (LTAP) center at CSU. The newsletter also had previously published articles about the federal BMS mandate and the PONTIS program (see Appendix D). Attendees consisted of individuals from the original interviewees, from other municipalities and counties, representatives of the CDOT and Colorado's FHWA Division office, a trainer from the LTAP center at CSU, and a structural engineering graduate student.

The workshop's program and some of the distributed items are shown in Appendix E. Background to the MPC project and its prior activities and developments were described. The basic principles of BMS and the features of the PONTIS software were summarized. Walt Mystkowski provided an update on the status of the implementation of PONTIS at the CDOT and its plans for access by local and county entities. A content overview of the developed manual was followed by a demonstration of several detailed examples, which illustrated the use of some of the basic features of PONTIS.

The second half of the workshop was comprised of an extensive hands-on example executed by the participants. The example led them through many sections of the developed user's manual. The example used a miniature database of 16 bridges, which was supplied to the developers of PONTIS by the state of Virginia. By using the actual bridges and their actual inspection data, participants were confronted with a realistic experience from which to learn. Some experiences involved missing or incomplete data, as can all too often occur in actual situations. The small sample size enabled the workshop to be completed in a practical time constraint. The workshop leader took a hands-off approach for this segment of the workshop. Participants were required to rely on the prototype *PONTIS Made S-I-M-P-L-E*, which had been distributed to each participant.

At the end of the workshop, participants completed an extensive questionnaire to determine whether the manual had achieved its goal. The questionnaire and tabulated results are provided in Appendix E. A dialogue also took place to gather introspective reaction and input. It was clear from the results that the manual and the workshop were effective tools to introduce new users to the workings of PONTIS at the particular version level employed. The version used (Version 2.0) was chosen because CDOT indicated it was the most practical level, in storage requirements and capability, for targeted first-time users at local and county levels. Advanced versions were much more in use by the state DOT itself.

Two distinct observations were drawn from the results of this workshop. One was the evident success in achieving the project objective of getting potential PONTIS users past intimidation of the comprehensive documentation provided with the software. The other was that although a process for surmounting this initial hurdle was developed, another awaits — actual implementation of PONTIS at local and county levels.

Responses to the quality and “user-friendliness” of the workshop and *PONTIS Made S-I-M-P-L-E* manual were overwhelmingly positive. Question 5 asked if the workshop was effective. Twelve attendees rated it at a 4 or 5 level (5 being highest). Question 13 posed, “After the workshop do you feel (a) more competent about PONTIS, (b) more comfortable using PONTIS?” For (a) three chose

3, four chose 4 and two chose 5. For (b) three chose 3, four chose 4 and two chose 5. The questions speak most directly to quality of the end product.

Responses to the “short answer” questions indicate the future hurdle for local and county users of PONTIS — attendees’ perception regarding actual need for *any* BMS at those user levels. Although participants are interested in using PONTIS in the effective management of their bridge inventory, many of them expressed a lack of incentives to invest resources into learning and using PONTIS. The responses to the question “Before this workshop, what obstacles or deterrents to adopting PONTIS do you see in your organization?” are informative. One answer states “Staffing limitation. CDOT performs inspections and reports on +20' bridges. No requirement exists for systematic monitoring of sub 20' bridges.” Another says, “I am not set up to run PONTIS. Though I try to keep abreast with the program.”

The day before the workshop, a seminar on the project was presented over the TEL8 telecommunications network to several university and state DOT sites in USDOT Region 8 (see Appendix F). Nick Arenella conducted the defense of his thesis work, derived from this project, as part of the formal requirements for a master of science degree. This afforded an interactive, audio-visual opportunity to “test the water” with an interstate audience of students; educators; and local, county and state bridge management personnel. While not a workshop involving hands-on use, the demonstrations shown as part of the thesis presentation and subsequent Q&A activity, provided more insight into reactions of other potential new users, some of whom may have been unaware of the project.

Once this sequence of extensive testing and feedback was completed, *PONTIS Made S-I-M-P-L-E* was refined and submitted for outside review by Walter Mystkowski. Several minor changes were made according to his input and recommendations. His overall impression of the *PONTIS Made S-I-M-P-L-E* manual was an excellent document that met its intended goal as a reference and teaching tool for local and county bridge management officials considering implementing PONTIS.

AREAS OF FUTURE RESEARCH

Background to the Project

Before indicating possible areas of future research one must first understand the history of this particular project. In fall 1993, CSU researchers completed development of a prototype bridge inspection computerized tool (Austin, 1993). This tool, Bridge Rating (BRAT), performed load and sufficiency ratings using the approaches given by the American Association of State Highway and Transportation Officials (AASHTO) and the NBIS, respectively. The user interface was in a spreadsheet format. In addition to physical bridge information, which can be measured (i.e. span, width, approach length), the system also managed subjective information (i.e. deck deterioration and implications of section loss of a girder). An expert system component was combined with a spreadsheet program to create the BRAT system. The first prototype was limited to use by trained bridge inspection engineers.

To refine this system to satisfy the needs of inexperienced bridge inspectors, four approaches were taken to enhance BRAT:

- 1) Commercially available software was found that would serve as the user interface and the expert system shell. This software is called ESTA (Prolog Development Center, 1993).
- 2) Using ESTA, a menu-driven interface for all of the BRAT spreadsheet was created and greater “help” facilities were developed.
- 3) To make the system more appropriate for inexperienced inspectors, the expert system was expanded to include more questions to manage uncertainty of inputs through using fuzzy logic.
- 4) The second prototype also was expanded to include the option of writing comments, which would be of help to the individual reviewing the results.

The final result of this work was a prototype portable computer tool for bridge inspection called Bridge Rating and Analysis (BRAIN) (Trantham-Hevelone, 1995). It was “tested” via a series of

hands-on workshops on evolving versions. The workshops were attended by interested local, county, and state bridge inspections and management personnel, including the Staff Bridge Engineer of the CDOT.

INTEGRATION OF PONTIS WITH PAST RESEARCH

BRAT, developed in 1993, basically was the prototype for BRAIN, developed in 1994. BRAIN was designed to be a highly user-friendly portable computer inspection tool that could be used by technical staff within a range of bridge inspection experience or capability. The motivation behind this was that in the rural west — particularly USDOT Region 8 — there are many bridges with spans less than 20 feet, often referred to as “sub 20' bridges,” which currently are not being inspected for inventorying purposes. The reason for this is two-fold.

For one, the local and county agencies that have jurisdiction over such bridges often do not have an experienced bridge inspection engineer to inspect the structures. An expert system-based tool like BRAIN leads them through interactively and documents the results via queries. Thus, unofficial preliminary inspections could be performed by less experienced technical staff. Fuzzy set theory and logic are used to account for the experience level initially indicated by the user. Second, related to this, is the fact that federal funding currently is not available for “sub 20' bridges.” Using BRAIN, it is feasible to inventory such bridges, albeit unofficially. The option to use less experienced personnel, or possibly maintenance personnel, gives local and county agencies more incentive for cataloging them. With such organized information available, jurisdictions also could promote use of state and federal funds for formal, official inspections, and repair and replacement funds.

It appears PONTIS will become the way in which many states manage bridges and request federal funding for repairs and replacement. As a result, a need exists for bridge management officials to understand how to use PONTIS for current qualifying bridges (length greater than 20 feet). However, the question about how to fund sub 20' bridges still remains. If local and county agencies can foster federal

funding for their currently non-qualifying (sub 20') bridges, the problem still remains of the lack of experienced engineers to inspect them. It should be noted that PONTIS is a program that has been written for such trained bridge inspectors. The logical answer to questions about employing the user-friendly interface already are developed within BRAIN. However, rather than having it access the NBIS-based spreadsheet developed with BRAT, the BRAIN interface could be mated with the PONTIS software.

In her thesis (derived from the development of BRAIN), Trantham-Hevelone states, "Additional refinement would serve to make BRAIN faster, even easier to use in the field, and better at storing information." One such refinement she suggests is that the "C++" language be used as an alternative to ESTA because the use of C++ "would provide the programmer more flexibility in designing the way questions could be asked and would reduce the amount of memory taken by the running of the program." It should be noted that BRAIN currently requires 12 megabytes of memory to run. By today's standards, this still is considered a large amount of memory.

PONTIS, too, is written in the "C" language. This suggests a natural implication that the questions, logic, and algorithm of the existing BRAIN interface could be recorded in C or C++ and be a seamless mate to the PONTIS software. That link would create a powerful, user-friendly, portable inspection tool. It could be used at all levels, from the municipality to state jurisdictions. At local and county levels it might be used by technicians, maintenance workers, interns, or junior engineers to conduct lower level, preliminary inspections of bridges. These would serve to begin documentation of inventory and to "red flag" bridges that need further study by a fully qualified inspector. Further, if done by a qualified bridge inspection engineer, the results would be in a format and on a basis accepted by federal agencies for inventory and funding requirements.

CONCLUSIONS

As the 21st Century approaches, there has been a dramatic shift in the way in which resources are used in the world's industrialized nations. As one can read about corporate downsizing and government restructuring, one also can expect that in the future even fewer funds may be available for the already overburdened infrastructure system. Regardless of funding levels, federal mandates assure that a higher level of bridge inspection database information be required from the states to receive federal funding. As of 1999, all 50 states will be required to request funds based on the outcome of a rational BMS. It is imperative that everyone responsible for bridge inventories at all levels be familiar with that process. In the case of Colorado, as well as many other states, this primarily consists of understanding PONTIS' capabilities and its implications to bridge maintenance and repair management. In some cases, the need to directly use PONTIS also exists.

PONTIS is a high quality and powerful, albeit complex, software package for BMS. Many bridge management officials could benefit from its use. Some initial fears of tackling this software can be allayed by the use of the "PONTIS Made S-I-M-P-L-E" guide and tutorial and attendance at workshops similar to the one presented in this project. However, before resource-limited local and county bridge owners can justify the expenditure of resources for PONTIS, they must be convinced of the actual necessity of implementing BMS. This may evolve as PONTIS becomes more prevalent in state DOTs, and new local and county policies are created to accompany use of a BMS.

With the funding of the Mountain-Plains Consortium (MPC), researchers at CSU have provided potential means for local and county bridge management officials to more readily access future federal bridge funds. To date, two tangible tools have been created: the bridge inspection software, BRAIN, and the abbreviated *PONTIS Made S-I-M-P-L-E* manual. BRAIN serves as a practical tool for current NBIS inspections and can be modified to interface with the PONTIS database. *PONTIS Made S-I-M-P-L-E*

facilitates bridge management officials' access to PONTIS and the federal bridge funding process associated with its use.

As the future unfolds, requirements are sure to change. Presently, this project's outcome provides a means to introduce local, county, and other bridge owners to the workings and potential of PONTIS. Presently, for sub 20' bridges, which are unofficial bridges, informal inspection and "red flagging" by the use of the NBI, database format already within BRAIN is possible and probably sufficient. BRAIN also can be customized to desired in-house formats. With these two powerful tools, local and county bridge management officials have practical solutions available for their current needs and researchers have strong, building blocks for efficiently meeting their future needs.

REFERENCES

- Abed-Al-Rahim, I.J. & Johnston, D.W. (1993). "Estimating Bridge Related Traffic Accident Rates and Costs," *Maintenance of Roadway Pavements and Structures*, Transportation Research Board, Washington, DC.
- Ash, R.B. (1965). *Information Theory*, Dover Publications, London, U.K.
- Austin, J.L. (1993). "Computer Assisted Bridge Rating for Small Bridges." MS Thesis, Colorado State University, Fort Collins, CO.
- Bridge Inspector's Training Manual 90* (1991). USDOT/FHWA, Office of Engineering, Bridge Division, Washington, DC.
- Gallager, R.G. (1968). *Information Theory and Reliable Communication*, John Wiley and Sons, New York.
- Golabi, Kamal, Thompson, P. D. & Hyman, W. (1993). *PONTIS Version 2.0 Technical Manual: A Network Optimization System for Bridge Improvements and Maintenance*, Federal Highway Administration, Office of Technology Applications, Washington DC.
- Hudson, S.W. et. al. (1987). *Bridge Management System*, Transportation Research Board, Washington, DC.
- Kahkonen, A. & Marshall, A.R. (1990). "Optimization of Bridge Maintenance Appropriations with the Help of a Management System: Development of a Bridge Management System in Finland," *Bridge Management: Inspection, Maintenance, Assessment and Repair*, Elsevier, New York.
- Liburdi, L. (1992). "Keynote Address: The Promise of ISTEA," *ISTEA and Intermodal Planning: Concept, Practice & Vision*, Transportation Research Board, Washington, DC.
- Markow, M.J. et. al. (1993). "Optimal Rehabilitation Times for Concrete Bridge Decks," *Maintenance Of Roadway Pavements and Structures*, Transportation Research Board, Washington, DC.
- Marshall, A.R. and Soderqvist, M.K. (1990). "Local Agency Experience with the Utilization of Bridge Management Systems in Finland and the United States," *Bridge Management: Inspection, Maintenance, Assessment and Repair*, Elsevier, New York.
- Mistewicz, M. (1993a). "Road Transport Needs in Poland," presented at Colorado State University, March 1993.
- Mistewicz, M. (1993b). "Bridge Inspections and Management Activities in Poland," presented at Colorado State University, March 1993.
- Mistewicz, M. (1993c). "Planning, Financing and Managing of Roads and Bridges in Poland," presented at Colorado State University, March 1993.

National Bridge Inventory Information System: Edit-Update Program (1993). USDOT/FHWA, Office of Engineering, Bridge Division, Washington DC.

Recording and Coding Guide for the Structure Inventory and Appraisal of the Nations Bridges (1988). USDOT/FHWA, Office of Engineering, Bridge Division, Washington DC.

Rosenblatt, M. (1960). "An Aggregation Problem for Markov Chains," *Information and Decision Processes*.

Sachs, P. & Smith, R.E. (1993). "How to Get Local Public Works Agencies to Use Structured Infrastructure Management Approaches," *Infrastructure: Planning and Management*, American Society of Civil Engineers, New York.

Sriskandan, K. (1990). "Bridge Management: An Overview," *Bridge Management: Inspection, Maintenance, Assessment and Repair*, Elsevier, New York.

Thompson, P. D. (1993). *PONTIS Version 2.0 Tutorial: A Network Optimization System for Bridge Improvements and Maintenance*, Federal Highway Administration, Office of Technology Applications, Washington DC.

Thompson, P. D. & Harrison, F. D. (1993). *PONTIS Version 2.0 User's Manual: A Network Optimization System for Bridge Improvements and Maintenance*, Federal Highway Administration, Office of Technology Applications, Washington DC.

Trantham-Hevelone, H.L. (1995). "A Knowledge Based System for the Inspection of Sub 20' Bridges: Bridge Rating and Inspection (BRAIN)," MS Thesis, Colorado State University, Fort Collins, CO.

Walters, L.C. et. al. (1993). "New Approach to Integrating, Engineering, Managerial, and Political Judgment: Development of the Utah Project Prioritization System," *Planning and Programming, Land Use, Public Participation, and Computer Technology in Transportation*, Transportation Research Board, Washington, DC.

APPENDIX A
LETTER SOLICITATING INTEREST

January 9, 1995

Department of Civil Engineering
Fort Collins, Colorado 80523-1372
(970) 491-5048
FAX: (970) 491-7727

Name
Title
Town/county
Address
City/state/zip

Re: PONTIS Bridge Management Software
Colorado State University Research Project

Dear Mr./Ms. Xyz:

First, I'd like to introduce myself. My name is Nick Arenella and I am a research assistant at CSU working on a project with Professor Richard Gutkowski regarding the bridge management software, PONTIS. Previously, I was a practicing bridge engineer for six years with experience in both bridge design and inspection and I have just recently gone back to graduate school at CSU.

The ISTEA mandates that each state develop a bridge management system and, as a result, the Colorado DOT has decided to implement the use of PONTIS, a federally advocated model. Presently, there are still many unknowns with regards to the implementation and use of this software for local and county bridge inventories. The Mountain Plains Consortium (MPC), which is funding this project, is particularly interested in how PONTIS can be used as a rural decision support system for low volume bridges. Additionally, this effort is being undertaken with the help of officials at CDOT responsible for implementing PONTIS in Colorado.

To this end the researchers at CSU are preparing to develop an abbreviated PONTIS user manual that keeps the needs of the rural bridge/highway management community in mind. To do this effectively and purposefully I would like to initially interview a few selected persons responsible for local and county bridge management. The intent is to get a sampling of specific questions, concerns, etc. with regards to the PONTIS bridge management software. The information gathered from such correspondence will then be used to write a more formal and comprehensive questionnaire to be mailed to local bridge management personnel throughout the state. The results of such a survey would then be used to focus the work so as to eventually produce a beneficial and well accepted user manual.

Professor Gutkowski has indicated that you may be willing to be interviewed as described above. Consequently, I am planning on calling you in regards to this letter shortly to find out if you are able to help me with this process. Any help that you could give with regards to this endeavor would be greatly appreciated.

Once again, thank you very much for your time and consideration in this matter.

Sincerely Yours,

Nicholas D. Arenella, P.E.

cc: R.M. Gutkowski

by phone:
at home
303-282-1787

by fax:
CSU CE Department
303-491-8671

by mail:
Department of Civil Engineering
Colorado State University
Fort Collins, CO 80523

APPENDIX B
INITIAL QUESTIONNAIRE

8. Do you have an IBM or compatible computer system?
9. Do you have a modem?
10. Are you interested in learning more about PONTIS?
11. Would you be able to attend a PONTIS workshop in Fort Collins?
12. Do you have the personnel available to perform inspections, say every two years, on your sub 20 bridges?
13. Whether or not you know about PONTIS specifically, if a bridge management software package could do anything you wish, what would you like to get as its principal output?

APPENDIX C

**PONTIS MADE S-I-M-P-L-E
(Cover Page, Peripherals and Table of Contents)**

Pontis Made S-I-M-P-L-E

*An
Introductory
User's Manual
and
Tutorial
for
Release 2.0*

Acknowledgments

This manual was written as part of my thesis requirement for the Masters of Science degree at Colorado State University and was part of a project that was funded under the Mountain Plains Consortium.

I would like to thank Dr. Richard Gutkowski of the MPC and professor of Civil Engineering at CSU. As my advisor, Dr. Gutkowski gave me much appreciated guidance on this project and as my teacher, he has also given me a much appreciated advanced knowledge of Structural Engineering. Additionally, the funding of the MPC and Dr. Gutkowski has made my Graduate education possible.

Finally, I would also like to thank the following individuals and their agencies for providing their time to me at the beginning of this project so as to insure that it started off in the most beneficial direction:

Walter Mystkowski, Colorado DOT; Denver, CO
Mike Whalen, Weld County, CO
Ron Winne, Larimer County, CO
Greg Muhonen, City of Loveland, CO

Nicholas D. Arenella
Fort Collins, CO

Preface

What Pontis is:

Pontis is a Bridge Management System (BMS) that meets all the requirements for a BMS as set forth in the 1991 Intermodal Surface Transportation Efficiency Act (ISTEA). Its name is derived from the Latin word for "bridge".

How Pontis is different than other Bridge Management Systems:

Pontis differs from many of the current inventory systems, both computerized and non-computerized. Rather than using a single rating number to represent the condition of a bridge element, Pontis is able to incorporate the fact that one section of an element (say a bridge deck) may be in one condition and that other sections of this same element may be in other conditions. It also uses statistical models that are designed to operate on groups of bridges or whole inventories as a unit, rather than individual structures. Furthermore, since the statistical profiles do not have to be very precise to get reliable network level conclusions, the field data collection for this detailed condition description is fairly quick and requires no elaborate measuring equipment or procedures.

The Scope of this Document:

This document is an abbreviated adaptation of the original Pontis manuals and tutorial (Release 2.0) and has been written with the needs of the rural bridge/highway management community in mind. Although this document is designed to stand alone, the original Pontis manual will need to be used for more advanced topics outside the scope of this abbreviated document. Additionally, several lengthy listings within the original manual are also referenced, rather than represented here.

Pontis is an outgrowth of the Federal Highway Administration Demonstration Project 71. The Pontis system was developed by a joint venture of Optima, Incorporated and Cambridge Systematics, incorporated with subcontract support from the Urban

Institute. The author of this manual has no ties to the developers or the development of Pontis. This manual has been written as a guide to facilitate the use of the existing software.

Disclaimer

This document is based on the extensive original Pontis 2.0 documentation. It is intended to assist the user to employ Pontis and that original documentation. Every effort was made to verify all of the examples given throughout the document. Additionally every effort was made to verify all statements made about the capabilities of Pontis based on a combination of the original documentation or when this was not explicit, through experimentation with the software itself. Neither, the Mountain-Plains Consortium, Colorado State University nor the Author can take responsibility for incorrect results obtained through the use of this document nor through the use of Pontis itself. As is with any software and its documentation, to spite any amount of quality control effort, the ultimate responsibility for the verification of the results lies with the user who makes use of these tools.

Table of Contents

Part One

Introduction & Getting Started

Chapter 1 Introduction

Section 1.0	How Pontis works in general	2
Section 1.1	The Database	2
Section 1.2	The MR&R Optimization Model	2
Section 1.3	The Improvement Model	3
Section 1.4	The Integration Model	3
Section 1.5	Pontis Generated Reports	4

Chapter 2 Getting Started

Section 2.0	Minimum Computer Use Proficiency Necessary	
2.0.1	<i>DOS</i>	5
2.0.2	<i>DOS EDIT</i>	5
Section 2.1	How to Use This Document	
2.1.0	<i>Before You Get Started</i>	5
2.1.1	<i>Pontis Terminology</i>	6
Section 2.2	Hardware Requirements	6
Section 2.3	Installing Pontis	7
Section 2.4	Touring the Menu	
2.4.1	<i>Running Pontis</i>	8
2.4.2	<i>Getting Help Pontis</i>	8

2.4.3	<i>The Pull Down Menu System</i>	8
-------	----------------------------------	---

Part Two Implementing Pontis

Chapter 3 Bridge and Element Information & the Database

Section 3.0	Introduction	11
Section 3.1	Inputting Bridge Information	
3.1.1	<i>Introduction</i>	11
3.1.2	<i>Inputting Bridge Information Using ASCII Text Files</i>	12
3.1.3	<i>Editing the NBI Input</i>	14
3.1.4	<i>Converting NBI Data into Pontis Data</i>	17
3.1.5	<i>Conducting Pontis Inspections and Inputting the Condition Data</i>	21
Section 3.2	Adding Bridges to the Inventory	21
Section 3.3	Database Reports	23

Chapter 4 The MR&R Optimization Model

Section 4.0	Introduction	34
Section 4.1	Element Deterioration Rates	
4.1.0	<i>Introduction</i>	34
4.1.1	<i>Answering the Expert Elicitation Questionnaire</i>	35
4.1.2	<i>Viewing and Editing the Existing Questionnaire Responses</i>	36
Section 4.2	MR&R Costs	
4.2.0	<i>Introduction</i>	39
4.2.1	<i>Viewing and Editing MR&R Costs</i>	40
Section 4.3	Improvement Costs Agency Policy	
4.3.0	<i>Introduction</i>	41

4.3.1	<i>Customizing Improvement and Replacement Models</i>	42
Section 4.4	Running the Optimization	46
Section 4.5	MR&R Optimization Reports	47
Section 4.6	Ad Hoc Analysis	50

Chapter 5
The Annual Updating Cycle

Section 5.0	Introduction	51
Section 5.1	Creating a Historical Database	51
Section 5.2	Rules for Annual Updating	53

APPENDIX D
PUBLICITY FOR THE PROJECT AND WORKSHOP



Department of Civil Engineering
Fort Collins, Colorado 80523-1372
(970) 491-5048
FAX: (970) 491-7727

Dear

As you may be aware, the Colorado Department of Transportation is working toward the implementation of the PONTIS bridge management software as the basis of inspection for the state bridge inventory. PONTIS is comprehensive software and involves extensive written documentation and manuals for adaptation to using it. It is not user friendly for even an experienced bridge manager.

I have been provided your name by the LTAP center at Colorado State University (CSU) related to potential interest in PONTIS at your jurisdiction. During the past year, Colorado State University has been developing a user manual entitled PONTIS Made Simple. Its purpose is to introduce new users to the PONTIS software, at any level of management, comfortably. Mr. Nick Arenella, an M.S. student has been developing the manual as a thesis project. I am his faculty advisor on the project.

Recently, the defense of his thesis was scheduled for May 2. He is located in Pittsburgh and traveling here for that purpose. Pursuant to that development a decision was made to conduct a workshop on the use of PONTIS Made Simple. Several nearby local municipalities and counties provided ongoing advice and will participate in the event. You, or an appropriate person responsible for bridges in your jurisdiction, may wish to attend the workshop.

I am enclosing a program for the workshop event to be held on May 3, 1996. No fee is involved and lunch will be provided. One only needs some involvement with computer databases for bridge inventory as background. No experience with PONTIS is presumed. Seating is available but limited due to computer access needs of the planned activities.

Thank you for your attention to this information. If you or another person has interest in participating in the workshop, please either call me at (970) 491-8291 or fax a reply to (970) 491-8671. Hopefully, this workshop proves opportune for you and you are able to attend.

Sincerely,

Richard M. Gutkowski
Professor of Civil Engineering

PONTIS Workshop to be Held at Colorado State University

On May 3, 1996 Colorado State University will host the PONTIS version 2.0 workshop. This event will be held at Colorado State University and is co-sponsored by Mountain Plains Consortium (MPC and the Colorado Department of Transportation). MPC is a university consortium for the USDOT in Region 8. CSU researchers are working to facilitate the use of PONTIS for new users at various levels of bridge management. The format of the workshop will be to demonstrate the use of a draft condensed users manual via lecture and hands on use directly on the computer.

The 1991 Intermodal Surface Transportation Efficiency Act (ISTEA) mandated that the state DOTs develop a bridge management system (BMS). The Colorado DOT (and many other state DOTs) is (are) implementing the use of PONTIS, a federally advocated model. PONTIS will eventually replace current inspection and inventorying procedures based on the National Bridge Inventory (NBI). The NBI uses single number measures to assign a state of condition to a bridge superstructure, substructure, channel, etc. and yields a single "sufficiency rating" to numerically characterize (in effect, to rank) the overall condition of a bridge.

PONTIS allows more detail about individual components. It also can assess the state of deterioration and likely consequences, allowing "what if?" scenarios to be examined. In fact, a translator program has been developed to approximately convert existing NBI database information to the PONTIS database format.

Unlike the NBI, PONTIS has statistical models to operate on groups of bridges or whole inventories. At the state DOT level, the complete state bridge inventory is involved and must be managed at the global level and to a lesser degree, at the detailed level. At county or local levels, the need may be very detailed or not depending on the approach at any given location. Bridge inspection may be done in-house or by sub-contracting. In the former case, detailed knowledge of PONTIS usage would be imperative. In the latter case, a manager may operate at the level of interpreting results, observing overall activity and developments, and conveying or receiving PONTIS information to and from the state DOT as related to the local or county inventory.

An equally vital aspect is that the mandated bridge management system must be capable of assessing deterioration, projecting its consequences on repair needs, planning resource allocation by priorities and relating the impact of bridge repair needs within other systems management needs, e.g. pavement management. PONTIS provides these capabilities and thus is a totally new element of capability available to the learner who is only accustomed to the NBI.

The federal documentation provided for PONTIS can be overwhelming to the new user, even if experienced with other BMS software. Researchers at Colorado State University are working with the Colorado Department of Transportation (CDOT) bridge management personnel to develop written, user friendly documentation and commentary. This abbreviated material will explain PONTIS and its use to a bridge inspector or manager in a targeted and more readily usable way.

Other states in Region 8 are implementing PONTIS. Indeed, states throughout the Region are faced with a need to consider the use of PONTIS to enable compatibility with the federal procedures and formats. If you are a state, county or municipal public bridge owner interested in participating at the workshop and/or formally reviewing the next draft documentation (to be available shortly after the workshop), please contact the principal investigator Professor Richard Gutkowski at Colorado State University at (970) 491-8291. No prior experience with PONTIS is needed, but you must have access to the PONTIS software if you wish to try the manual actively at your own location. Space is limited to a small group environment so participation will be on a selective basis. Reply early!

Software for Bridge Inspection

On May 3, 1996, Colorado State University will host the PONTIS version 2.0 workshop. This event will be held at Colorado State University (CSU) and is cosponsored by the Mountain Plains Consortium (MPC) and the Colorado Department of Transportation (CDOT). MPC is a university consortium for the U.S. DOT in Region 8. PONTIS is a bridge inspection/management computer package that the CDOT is implementing. CSU researchers are working to facilitate the use of PONTIS for new users at various levels of bridge management. The format of the workshop will be to demonstrate the use of a draft condensed users manual via lecture and hands-on use directly on the computer.

The 1991 Intermodal Surface Transportation Efficiency Act mandated that the state DOTs develop a bridge management system (BMS). The CDOT (and many other state DOTs) is implementing the use of PONTIS, a federally advocated model. PONTIS will eventually replace current inspection and inventory procedures based on the National Bridge Inventory (NBI). PONTIS allows more detail about individual components than NBI. It also can assess the state of deterioration and likely consequences, allowing what-if scenarios to be examined. In fact, a translator program has been developed to approximately convert existing NBI database information to the PONTIS format.


Unlike the NBI, PONTIS, has statistical models to operate on groups of bridges or whole inventories. At the state DOT level, the complete state bridge inventory is involved and must be managed at the global level and, to a lesser degree, at the detailed level. At county or local levels, the need may be very detailed depending on the approach at any given location.

An equally vital aspect is that the bridge management system must be capable of assessing deterioration, projecting its consequences on repair needs, planning resource allocation by priorities and relating the impact of bridge repair needs within other systems management needs, e.g. pavement management. PONTIS provides these capabilities and thus is a totally new element of capability available to the manager who is only

accustomed to the NBI.

The federal documentation provided for PONTIS can be overwhelming to the new user, even if experienced with other BMS software. Researchers at CSU are working with CDOT bridge management personnel to develop written, user friendly documentation and commentary. This abbreviated material will explain PONTIS and its use to a bridge inspector or manager in a targeted and more readily usable way.

If you are a state, county or municipal public bridge owner interested in participating at the workshop and/or formally reviewing the next draft documentation (to be available shortly after the workshop), please contact the principal investigator, CSU Professor Richard Gutkowski, at (970) 491-8291. No prior experience with PONTIS is needed, but you must have access to the PONTIS software if you wish to try the manual actively at your own location. Space is limited to a small group environment, so participation will be on a selective basis. Reply early!

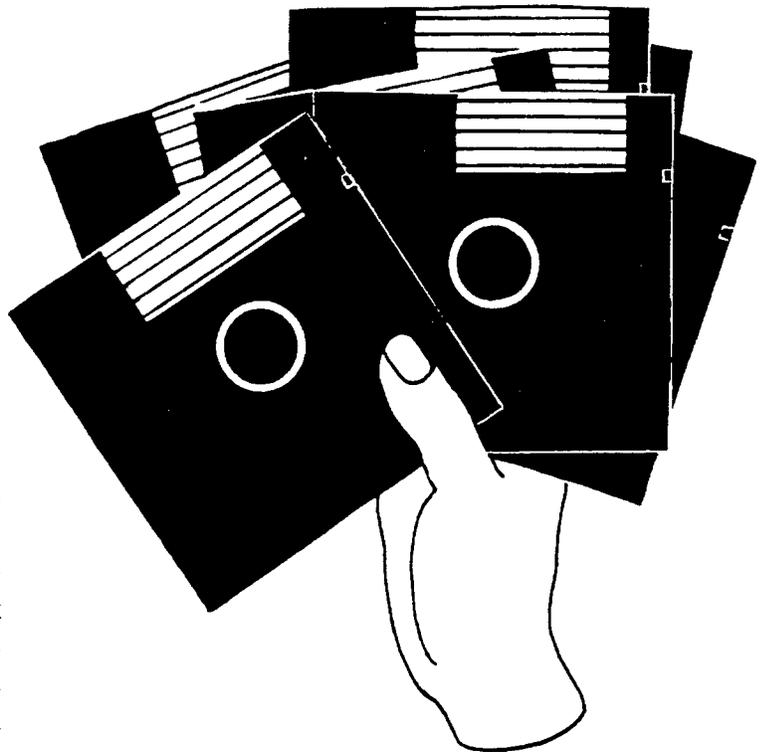

Bridge Management System (BMS): A New Tool for Bridge Owners

Bridge owners make decisions daily in the way they manage the bridges in their inventory. Decisions are made as to whether or not maintenance, rehabilitation, or replacement actions are taken on a particular bridge.

The Bridge Management System (BMS) recently emerged as a tool to assist owners in making their bridge decisions. The BMS helps identify current and future bridge needs, and the right mix of bridge maintenance, rehabilitation, or replacement action to meet these needs and achieve the most cost effective use of bridge funds.

Through the Intermodal Surface Transportation Efficiency Act (ISTEA) of 1991, Congress mandated that a BMS be one of the six management systems that States are required to develop. The Federal Highway Administration (FHWA) published rules for States to follow in developing a BMS. The three general requirements follow.

1. *States shall have a BMS that includes all bridges on and off Federal-aid highways that are inventoried and inspected under National Bridge Inspection standards. This includes county and city bridges.*
2. *States shall maintain a centralized bridge database.*
3. *A State BMS shall include network analyses procedures capable of analyzing data for all bridges in the inventory or in any subset. A subset could include county bridges, city bridges, bridges in a Metropolitan Planning Organization (MPO) area, or even bridges on a particular route.*

States will provide the Bridge Management System output for local bridge owners to use in

their planning processes and bridge project selections. A fully operational BMS has the ability to provide the following information.

1. *Assess bridge conditions now and in the future with and without intervening actions. This helps show the benefits of preventive maintenance.*
2. *Identify the feasible actions to improve bridge conditions, safety, and serviceability and estimate the cost of those actions.*
3. *Determine the optimal mix of maintenance, rehabilitation, or replacement over time given budget constraints.*
4. *Estimate user cost savings for making specific improvements to a given bridge.*
5. *Prioritize bridges for project selection.*

The BMS joins management, engineering, statistics, and economics in making the most appropriate recommendations for bridge work. Management sets priorities and levels of service, engineering covers the structural analysis, statistics predict future conditions of bridges, and economics analyze cost/benefit ratios for optimization.

Actions on one bridge are considered and weighed against actions on other bridges in the whole system so that work is prioritized in the most cost effective manner. Additionally, life cycle costs, rather than first cost, are considered when making project and bridge selection decisions.

This article is adapted from the Missouri Transportation Bulletin, Volume 10, Number 4, 1994. ♦

Bridging the Gap With PONTIS

In anticipation of the Intermodal Surface Transportation Efficiency Act of 1991 requirements for States to implement Bridge Management Systems (BMS), the Federal Highway Administration (FHWA) initiated a project in 1989 to conceptualize a network level BMS and provide easily customized software that can be transported from State to State. This software, named PONTIS (a Latin word for bridge) will be used by many States in their BMS. Thirty-eight States have adopted PONTIS to date.

The development of PONTIS was enhanced by a unique joint venture among FHWA's Office of Technology Applications and Bridge Division; the California Department of Transportation; Cambridge Systematics, Inc., and Optima, Inc. The project team also included a technical working group composed of six States with bridge inventories that are different in size and character. State participation was expanded in the beta testing phase to include 13 States. This widespread participation in the development process served as a catalyst for issue resolution and consensus building. A public-domain version of PONTIS is now available and PONTIS will be further enhanced in 1995 as AASHTOWare.

While much of the data required for PONTIS is already collected and reported in the National Bridge Inventory (NBI), additional data that is needed and not currently collected include action costs, user costs, and bridge elements. Bridge elements are a big part of a BMS and take time to identify and collect.

A bridge element is a bridge component that is important from structural, user, and cost standpoints. Examples of bridge components include decks, abutments, and piers. For instance, PONTIS requires that inspectors quantify and

rate specific elements of a bridge (such as linear feet of painted steel girder) instead of simply providing an overall NBI "superstructure" rating. Rather than having just one "substructure" rating for a bridge with 16 piers, 2 caps, and 2 abutments, each element will have its own rating.

Another key ingredient of PONTIS is its prediction capability. The program uses statistics to predict the deterioration of various components of a bridge. The prediction curves are built upon actual data fed to the system year by year.

While States are being asked to use "element level" inspections, ISTEA mandates that federal apportionment be based upon existing mechanisms. For bridges that means sufficiency ratings that use NBI numbers remain important. FHWA, the Colorado Department of Transportation, and the University of Colorado developed an automated translator which converts element level condition data into NBI numbers for federal reporting requirements. The translator should be available nationwide by the end of 1994.

Will PONTIS be a pain or gain for local entities? Since the State continues being responsible for all bridge inspections, element level data will be collected for local bridges. There is a question about what local maintenance data will be required by PONTIS. This type of data may not be readily available in many local jurisdictions and could be a burden to collect, if required. However, PONTIS is public domain software and can be obtained by a local agency. For counties and cities with large numbers of bridges, PONTIS has potential to be a great tool for their bridge management programs. ♦

APPENDIX E

**PONTIS MADE SIMPLE - A WORKSHOP
(Program, Overheads, Questionnaire and Results)**

PONTIS Made SIMPLE - A Workshop

Date: May 3, 1996
Location: Colorado State University
Room: B206 in the Engineering Building
Presented By: Nick Arenella

PROGRAM:

9:00 - 9:15	Introductions and program	Gutkowski, Valencia
9:15 - 9:30	Background on the MPC project.	Gutkowski
9:30 - 9:45	Status of Pontis implementation	Mystkowski
9:45 - 10:00	Summary of the MPC project activities.	Arenella
10:00 - 10:15	Coffee Break	
10:30 - 11:15	Description of the elementary Pontis user's manual	Arenella
11:15 - 12:00	Demonstrations of Pontis based on examples in the manual	Arenella
12:00 - 1:00	Lunch	
1:00 - 2:30	Hands on computer exercise	Attendees
2:30 - 3:15	Open discussion and critique of manual	All

<u>ISTEA BMS Requirements*</u>	<u>Pontis</u>	<u>NBI</u>
Predicting Bridge Needs	YES	NO - User may do this but NBI system itself does not.
Defining Bridge Conditions	YES	YES
Allocating Funds for Construction, Replacement, Rehabilitation and Maintenance Actions	YES	NO - User may do this but NBI system itself does not.
Identifying and Prioritizing Bridges for MR&R Actions	YES	YES - Does not as effectively prioritize. Pontis uses prediction models beyond the capacity of a sufficiency rating.
Identifying Bridges for Posting	YES	YES
Finding Cost Effective Alternatives for Each Bridge	YES	NO
Recommending MR&R Actions	YES	NO
Accounting of MR&R Actions	YES	NOT DIRECTLY
Scheduling and Performing Minor Maintenance	YES	NO
Monitoring and Rating Bridges	YES	YES
Maintaining an Appropriate Database of Information	YES	YES/NO - "Appropriate" is subjective.

*Hudson, S.W. et. Al. (1987). *Bridge Management Systems*, Transportation Research Board, Washington, DC.

Pontis vs. NBI Comparison

Pontis in a Nutshell

- ▶ Input your bridge information and conditions using:
 - NBI format (software will convert to Pontis for you)
 - Pontis format directly

- ▶ Answer expert elicitation questionnaire about deterioration rates.

- ▶ Input costs.

- ▶ Input available funds.

- ▶ Run optimization models
 - MR&R (meet original design specs for structure)
 - Improvement (exceed original design specs for structure)
 - Integration

- ▶ View reports that tell you how to best allocate your funds, or

- ▶ View reports that give you straight information on a structure

EVALUATION FORM

Please help evaluate the value of the MPC project and the delivery of this workshop. You can do this by taking a few minutes to fill out this questionnaire. Your input will be invaluable in determining if we should continue this workshop on a regular basis and how the delivery should be structured. Thank you for participating and your help in the evaluation.

DEMOGRAPHICS

Workshop Title: Implementation of PONTIS- A Bridge Management Software

Have you ever attended a CSU/MPC workshop before? ___ Yes ___ No

Your Affiliation/Organization (please circle)

State DOT
Professor

FHWA
Student

County Engineer
Other_____

If from a state DOT, Central or District office? _____

Your job type or title : _____

My principal activity is bridge:

design___ research___ management___ inspector___ other___

EVALUATION QUESTIONS

Please rate each of the following on a basis of 1 = poor to 5 = excellent

- | | | | | | | |
|-----|--|---|---|---|---|---|
| 1. | This MPC project is valuable to the intended end user | 1 | 2 | 3 | 4 | 5 |
| 2. | The process CSU is implementing to assist in the adoption and use of Pontis is good | 1 | 2 | 3 | 4 | 5 |
| 3. | The instructor was knowledgeable | 1 | 2 | 3 | 4 | 5 |
| 4. | The workshop was arranged well | 1 | 2 | 3 | 4 | 5 |
| 5. | The workshop was conducted effectively | 1 | 2 | 3 | 4 | 5 |
| 6. | The instruction was effective | 1 | 2 | 3 | 4 | 5 |
| 7. | The hands on examples were well conceived | 1 | 2 | 3 | 4 | 5 |
| 8. | The executions of the hands on exercises was very informative for me | 1 | 2 | 3 | 4 | 5 |
| 9. | The hands on examples relate well to local/county users | 1 | 2 | 3 | 4 | 5 |
| 10. | The time allotted to the hands on exercises was sufficient
1 = less time needed; 5 = a lot more time needed | 1 | 2 | 3 | 4 | 5 |
| 11. | This workshop would be a good basis for developing on Pontis for persons who are | | | | | |
| | a) new bridge inspectors | 1 | 2 | 3 | 4 | 5 |
| | b) new bridge managers | 1 | 2 | 3 | 4 | 5 |
| | c) experienced bridge inspectors | 1 | 2 | 3 | 4 | 5 |
| | d) experienced bridge managers | 1 | 2 | 3 | 4 | 5 |

- | | | | | | |
|---|---|---|---|---|---|
| 12. As a result of this workshop, I am more inclined to utilize Pontis | 1 | 2 | 3 | 4 | 5 |
| 13. After the workshop do you feel | | | | | |
| a) more competent about Pontis? | 1 | 2 | 3 | 4 | 5 |
| b) more comfortable in using Pontis? | 1 | 2 | 3 | 4 | 5 |
| 14. I feel that this workshop or an improved version would be well attended by other local and county persons responsible for bridge inspection and/or management | 1 | 2 | 3 | 4 | 5 |
| 15. Is PONTIS MADE SIMPLE developed at the needed technical level? | 1 | 2 | 3 | 4 | 5 |
| 16. I would definitely use the final PONTIS MADE SIMPLE manual in my organization. | 1 | 2 | 3 | 4 | 5 |
| 17. I would advocate the use of the final PONTIS MADE SIMPLE manual in other organizations | 1 | 2 | 3 | 4 | 5 |
| 18. The quality of the workshop materials was good. | 1 | 2 | 3 | 4 | 5 |

Please suggest new MPC research project topics that would serve to extend the effort to implement Pontis.

Please comment on your view of where municipalities and counties stand in being able to adopt Pontis (e.g. have the need, have the computers, have the software version 2.0 etc..)

If familiar with the CSU project on Portable Computer Tool for Inspections of Small Bridges (BRAIN project), would you see value in adopting it to Pontis in the same way?

Before this workshop, what obstacles or deterrents to adopting Pontis do you see in

a) your organization

b) local/county agencies

c) state level users

would this workshop help overcome them?

Presently would you anticipate using Pontis version 2.0 or waiting until Pontis 3.0, 3.1are available? Explain your situation please.

Is Pontis coming into required implementation too fast for your organization?

Pontis Questionnaire Results

- | | | | | | |
|-------|---|--------|---|-----|-------------------------------------|
| 1. | 1 chose 2
1 chose 3
3 chose 4
4 chose 5 | 11.b) | 1 chose 2
3 chose 4
5 chose 5 | 18. | 1 chose 3
4 chose 4
4 chose 5 |
| 2. | 2 chose 3
4 chose 4
3 chose 5 | 11. c) | 4 chose 2
2 chose 3
2 chose 4
1 neutral | | |
| 3. | 1 chose 4
8 chose 5 | 11. d) | 2 chose 2
1 chose 3
3 chose 4
2 chose 5
1 neutral | | |
| 4. | 4 chose 4
5 chose 5 | 12. | 3 chose 3
4 chose 4
2 chose 5 | | |
| 5. | 2 chose 4
7 chose 5 | 13. a) | 3 chose 3
4 chose 4
2 chose 5 | | |
| 6. | 5 chose 4
4 chose 5 | 13. b) | 3 chose 3
4 chose 4
2 chose 5 | | |
| 7. | 3 chose 4
6 chose 5 | 14. | 1 chose 3
3 chose 4
5 chose 5 | | |
| 8. | 3 chose 3
1 chose 4
5 chose 5 | 15. | 1 chose 3
6 chose 4
2 chose 5 | | |
| 9. | 5 chose 4
3 chose 5
1 neutral | 16. | 1 chose 1
1 chose 3
3 chose 4
1 chose 5
3 no answer | | |
| 10. | 1 chose 2
7 chose 3
1 chose 5 | 17. | 1 chose 2
2 chose 3
3 chose 4
3 chose 5 | | |
| 11.a) | 1 chose 1
2 chose 2
3 chose 3
2 chose 4
1 chose 5 | | | | |

APPENDIX F
TEL8 SEMINAR ANNOUNCEMENT

Unit 2



Seminar Announcement Department of Civil Engineering

Investigation of PONTIS - A Bridge Management Software

by Nick Arenella

NOTE: This seminar (thesis defense) is being presented locally and over the TEL8 satellite telecommunications network to ten sites in six states.

ABSTRACT

The 1991 Intermodal Surface Transportation Efficiency Act (ISTEA) mandated that state DOTs develop a bridge management system (BMS) on a defined time schedule. The Colorado DOT (and many other state DOTs) is (are) implementing the use of PONTIS, a federally advocated model. PONTIS will eventually replace current inspection and inventorying procedures based on the National Bridge Inventory (NBI). PONTIS allows more detail about individual components and also can assess the state of deterioration and likely consequences, allowing "what if?" scenarios to be examined. It has extensive and advanced probabilistic models incorporated for such needs. PONTIS is presently a "black box" environment to users. Also, county and local bridge owners are accustomed to inventorying bridges by the NBI approach. Indeed, a translator program has been developed to approximately convert existing NBI data base information to the PONTIS data base format. A project has been completed to develop a written, user friendly documentation and commentary for PONTIS entitled PONTIS MADE SIMPLE. This much abbreviated material explains PONTIS and its use to a bridge inspector or manager in a targeted and usable way. This M.S. thesis presentation covers that project and the resulting documentation and its use with the PONTIS software.

DATE: May 2, 1996

TIME: 2:00-3:15 PM

LOCATION: Engineering Building - Room AR111, Colorado State University

